


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
AJ	17	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B		REV PER EC 0514-0092-05	10DEC2005	REH	KW

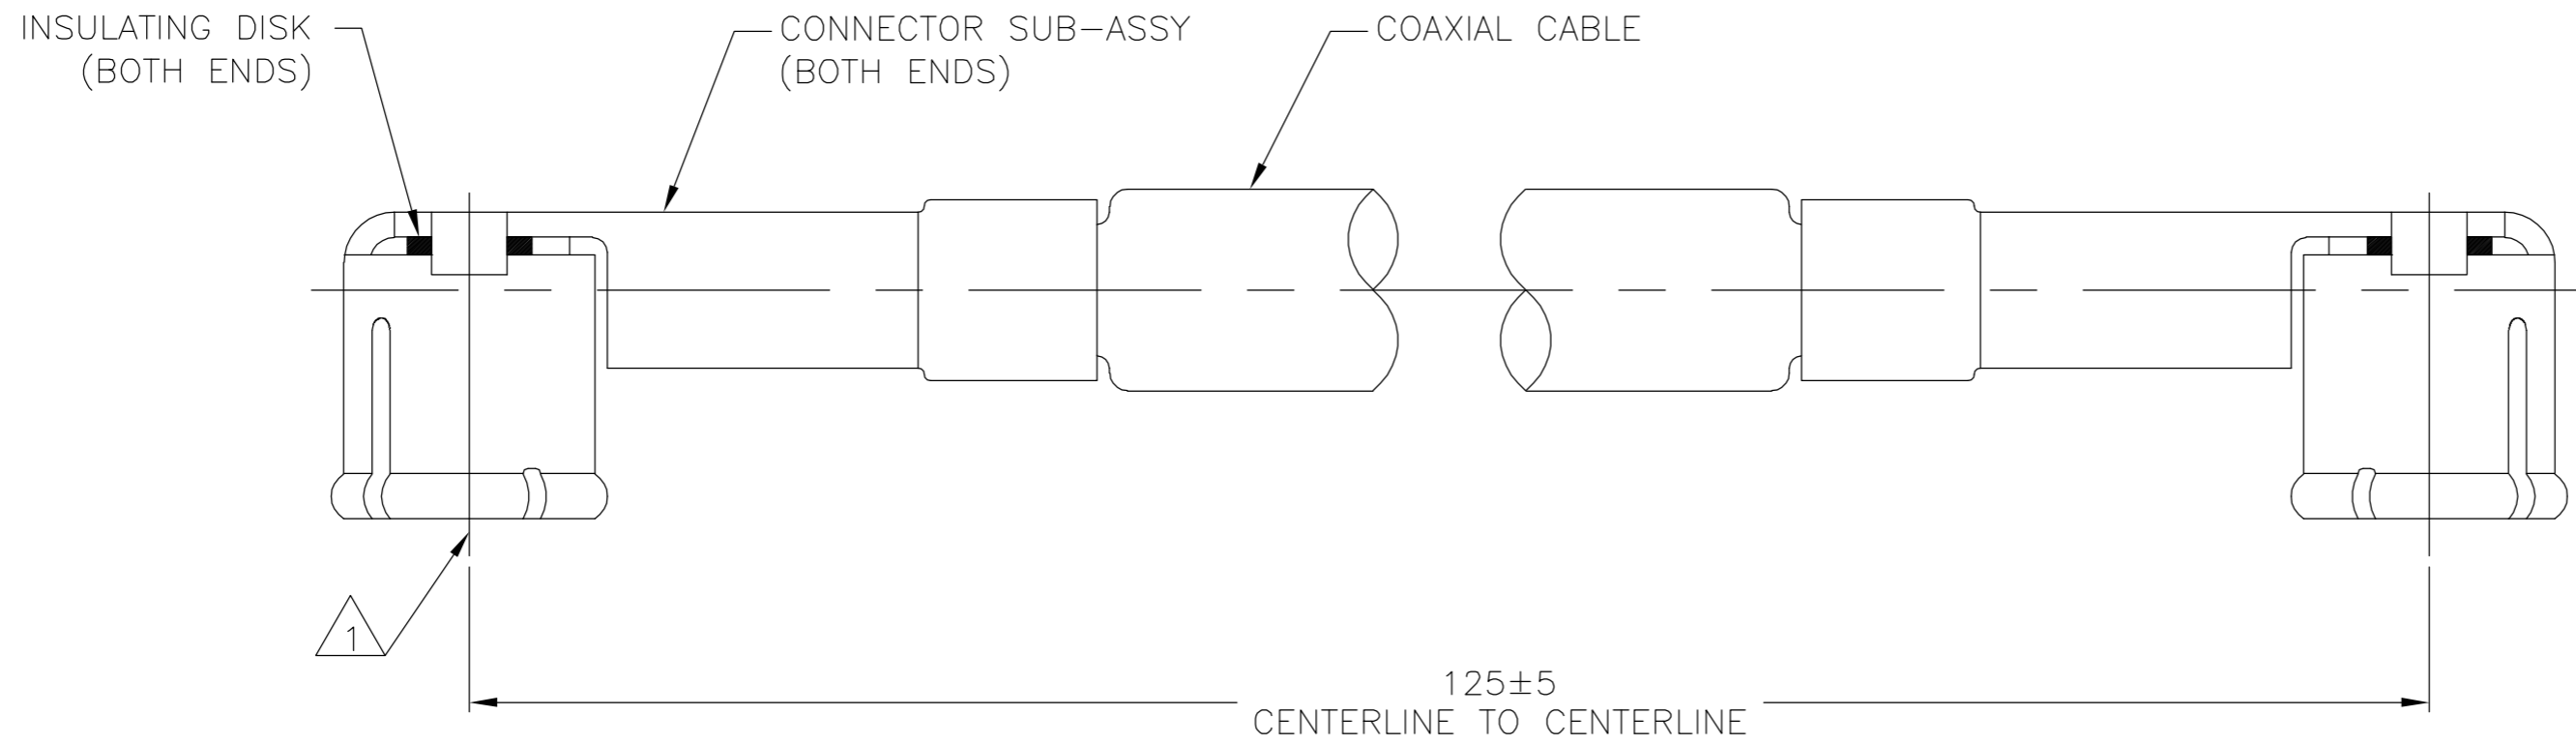

1064305-1
PART NUMBER

1 CONNECTOR CENTERLINES SHALL BE ALIGNED WITHIN ±30°.

CONNECTOR	MATERIAL	FINISH
OUTER CONTACT	BERYLLIUM COPPER	GOLD PLATE
CENTER CONTACT	BERYLLIUM COPPER	GOLD PLATE
DIELECTRIC	POLYPROPYLENE, GF	N/A
CABLE		
JACKET	POLYVINYL CHLORIDE (PVC)	N/A
SHIELD	SILVER PLATED COPPER WIRE, 38 AWG	N/A
DIELECTRIC	PERFLUOROALKOXY (PFA)	N/A
CENTER CONDUCTOR	SILVER PLATED COPPER CLAD STEEL, 30 AWG	N/A
INSULATING DISK	POLYESTER	N/A
COMPONENT	MATERIAL	FINISH

ELECTRICAL	
FREQUENCY	DC - 6 GHz
NOMINAL IMPEDENCE	50 OHMS
VOLTAGE RATING	250 VOLTS (VRMS MAX) @ SEA LEVEL
VSWR (MATED CONNECTORS ONLY)	1.20:1 MAX @ 2 GHz 1.40:1 MAX @ 6 GHz
INSULATION RESISTANCE	1,000 MEGOHMS MIN
DIELECTRIC WITHSTANDING VOLTAGE	500 VOLTS (VRMS MIN) @ SEA LEVEL
MECHANICAL	
CONNECTOR DURABILITY	100 MATING CYCLES
ENVIRONMENTAL	
TEMPERATURE RATING	-40°C(-40°F) TO +105°C(221°F)

PRODUCT SPEC

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P.RESNIC 24MAY91	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm		CHK	NAME OSMT RIGHT ANGLE JACK TO JACK CABLE ASSY	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD [Signature] 05/13/92	RESTRICTED TO	
0 PLC ± -		PRODUCT SPEC	SIZE A2	
1 PLC ± -		APPLICATION SPEC	CAGE CODE 00779	
2 PLC ± -			DRAWING NO C=1064305	
3 PLC ± -			SCALE 12:1	
4 PLC ± -			SHEET 1 of 1	
ANGLES ± -		WEIGHT -	REV B	
FINISH -		CUSTOMER DRAWING		

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)