
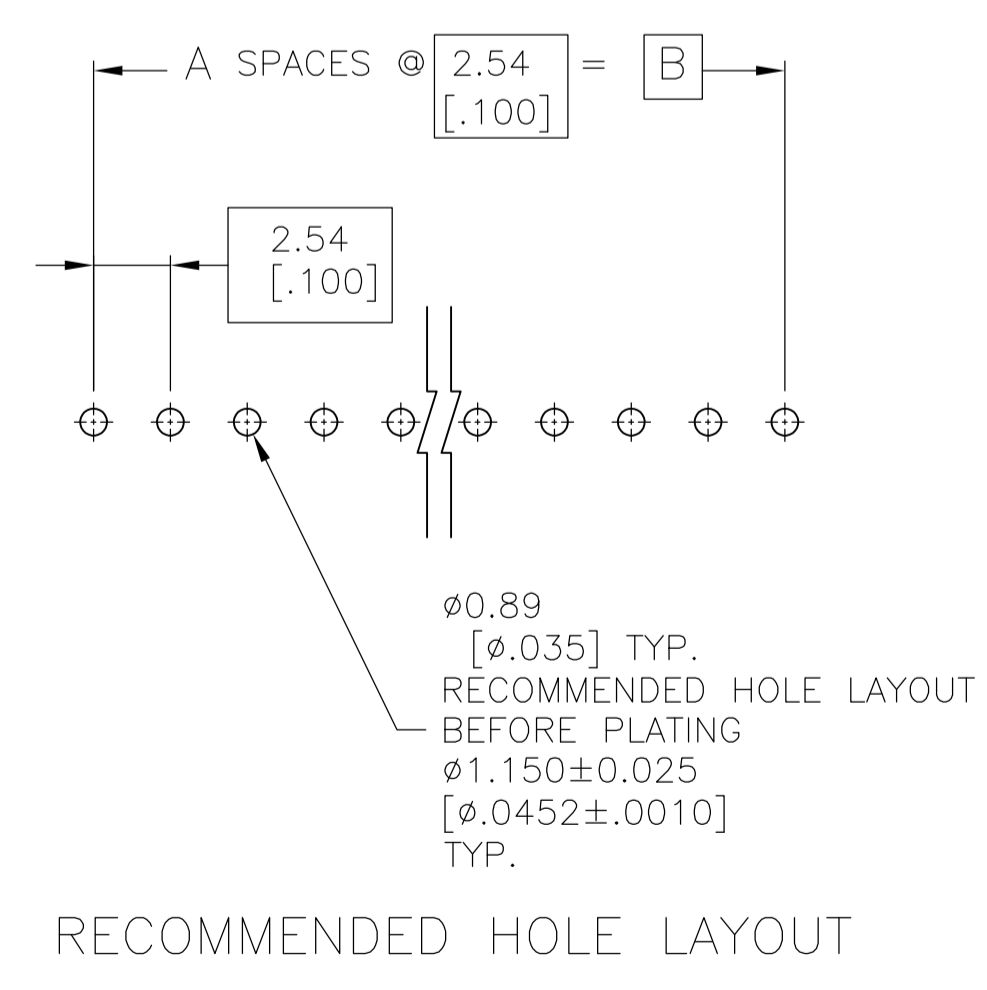


- 1 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADER IS HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- 4 FINISH: 0.000127 [.000005] GOLD ON CONTACT AREA, 0.00254-0.00508 [.000100-.000200] MATTE TIN-LEAD ON SOLDER TAIL, ALL OVER 0.00127 [.000050] NICKEL.
- 5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

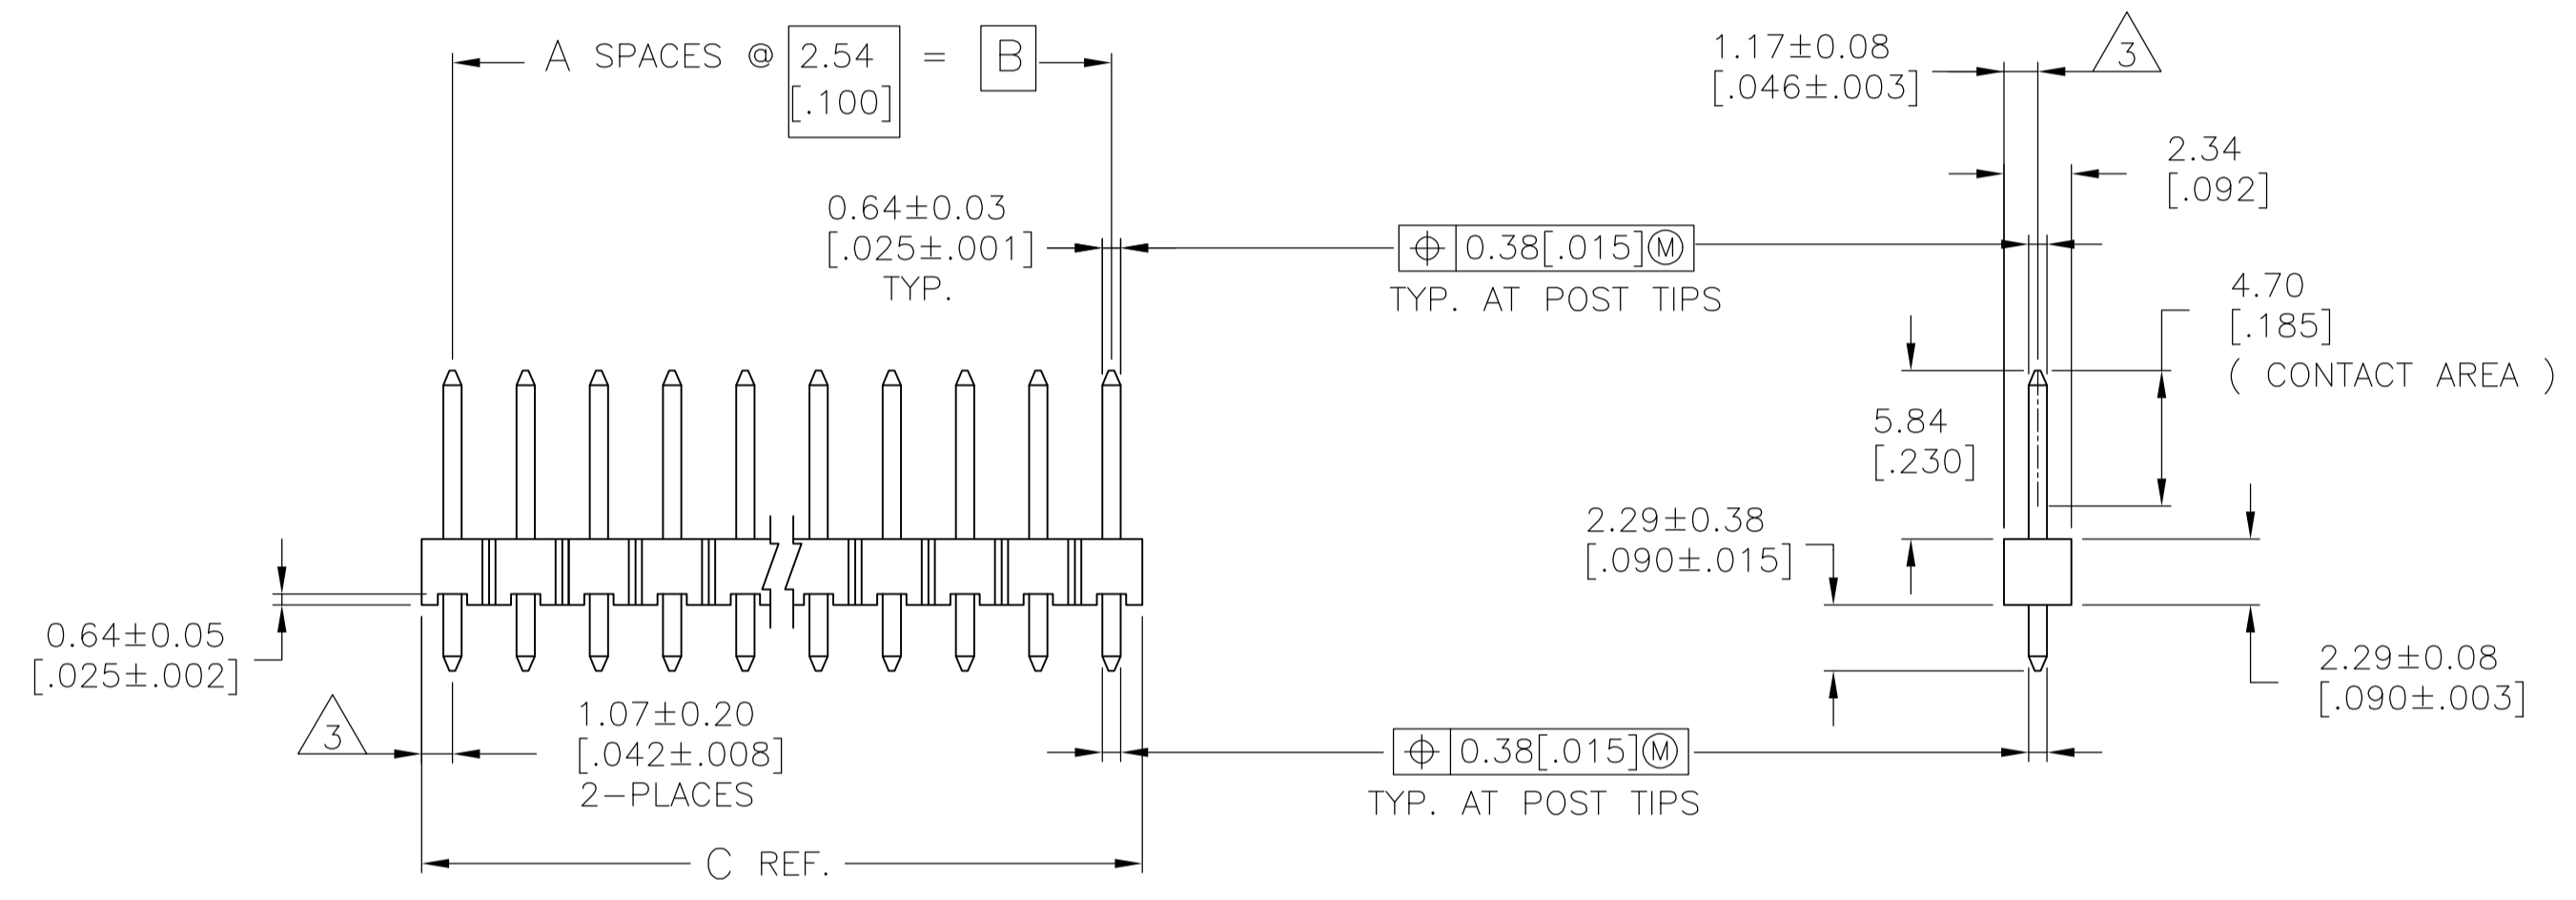

OBSOLETE		101.19	99.06	39	40	4-146382-0
		[3.984]	[3.900]			
		98.65	96.52	38	39	3-146382-9
		[3.884]	[3.800]			
		96.11	93.98	37	38	3-146382-8
		[3.784]	[3.700]			
		93.57	91.44	36	37	3-146382-7
		[3.684]	[3.600]			
		91.03	88.90	35	36	3-146382-6
		[3.584]	[3.500]			
		88.49	86.36	34	35	3-146382-5
		[3.484]	[3.400]			
		85.95	83.82	33	34	3-146382-4
		[3.384]	[3.300]			
		83.41	81.28	32	33	3-146382-3
		[3.284]	[3.200]			
		80.87	78.74	31	32	3-146382-2
		[3.184]	[3.100]			
		78.33	76.20	30	31	3-146382-1
		[3.084]	[3.000]			
		75.79	73.66	29	30	3-146382-0
		[2.984]	[2.900]			
		73.25	71.12	28	29	2-146382-9
		[2.884]	[2.800]			
		70.71	68.58	27	28	2-146382-8
		[2.784]	[2.700]			
		68.17	66.04	26	27	2-146382-7
		[2.684]	[2.600]			
		65.63	63.5	25	26	2-146382-6
		[2.584]	[2.500]			
		63.09	60.96	24	25	2-146382-5
		[2.484]	[2.400]			
		60.55	58.42	23	24	2-146382-4
		[2.384]	[2.300]			
		58.01	55.88	22	23	2-146382-3
		[2.284]	[2.200]			
		55.47	53.34	21	22	2-146382-2
		[2.184]	[2.100]			
		52.93	50.80	20	21	2-146382-1
		[2.084]	[2.000]			
	50.39	48.26	19	20	2-146382-0	
	[1.984]	[1.900]				
	47.85	45.72	18	19	1-146382-9	
	[1.884]	[1.800]				
	45.31	43.18	17	18	1-146382-8	
	[1.784]	[1.700]				
	42.77	40.64	16	17	1-146382-7	
	[1.684]	[1.600]				
	40.23	38.10	15	16	1-146382-6	
	[1.584]	[1.500]				
	37.69	35.56	14	15	1-146382-5	
	[1.484]	[1.400]				
	35.15	33.02	13	14	1-146382-4	
	[1.384]	[1.300]				
	32.61	30.48	12	13	1-146382-3	
	[1.284]	[1.200]				
	30.07	27.94	11	12	1-146382-2	
	[1.184]	[1.100]				
	27.53	25.40	10	11	1-146382-1	
	[1.084]	[1.000]				
	24.99	22.86	9	10	1-146382-0	
	[.984]	[.900]				
	22.45	20.32	8	9	146382-9	
	[.884]	[.800]				
	19.91	17.78	7	8	146382-8	
	[.784]	[.700]				
	17.37	15.24	6	7	146382-7	
	[.684]	[.600]				
	14.83	12.70	5	6	146382-6	
	[.584]	[.500]				
	12.29	10.16	4	5	146382-5	
	[.484]	[.400]				
	9.75	7.62	3	4	146382-4	
	[.384]	[.300]				
	7.21	5.08	2	3	146382-3	
	[.284]	[.200]				
	4.67	2.54	1	2	146382-2	
	[.184]	[.100]				
	2.13	-	0	1	146382-1	
	[.084]	[-]				
POSTS OMITTED	C	B	A	NO. OF POSITIONS	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

STE TE Connectivity

APPROVED: G. DUBNICZKI 6/6/95

NAME: HEADER ASSEMBLY, MOD II, BREAKAWAY, SINGLE ROW, VERTICAL, W/.025 SQ. POSTS

SIZE: A1

SCALE: 4:1

SHEET: 1 OF 1

REV: E

WEIGHT: -

CUSTOMER DRAWING

APPROVED: T. HOFFMAN 6/5/95

CHK: G. DUBNICZKI 6/6/95

APPROVED: G. DUBNICZKI 6/6/95

PRODUCT SPEC: -

APPLICATION SPEC: -

FINISH: 4

POSTS: -

REVISIONS:

NO.	DESCRIPTION	DATE	BY	APPV
1	ECO-14-000260	05JUL2014	NK	MM

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)