


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
AF	50	N2	REVISED PER ECR-19-013909	03OCT2019	PC	MB	



- CONTINUOUS STRIP ON REELS WITH TERMINALS LOCATED ON 8.38 [.330] CENTERS.
- △ SLOT TERMINATES EITHER SINGLE OR DOUBLE MAGNET WIRES OF THE SAME TYPE AND SIZE, COPPER RANGE IS 0.36-0.57mm [#27-#23] AWG. ALUMINIUM RANGE IS 0.51-0.64mm [#24-#22] AWG, ALUMINIUM WIRE RANGE APPLIES FOR POST TIN PLATED PART NUMBERS ONLY.
- AFTER INSERTION INTO PLASTIC HOLDER TAB PORTION MUST BE BENT OVER 45° TO 90° OR POTTED-IN TO PREVENT PULL-OUT WHEN MATING RECEPTACLE IS DISCONNECTED.

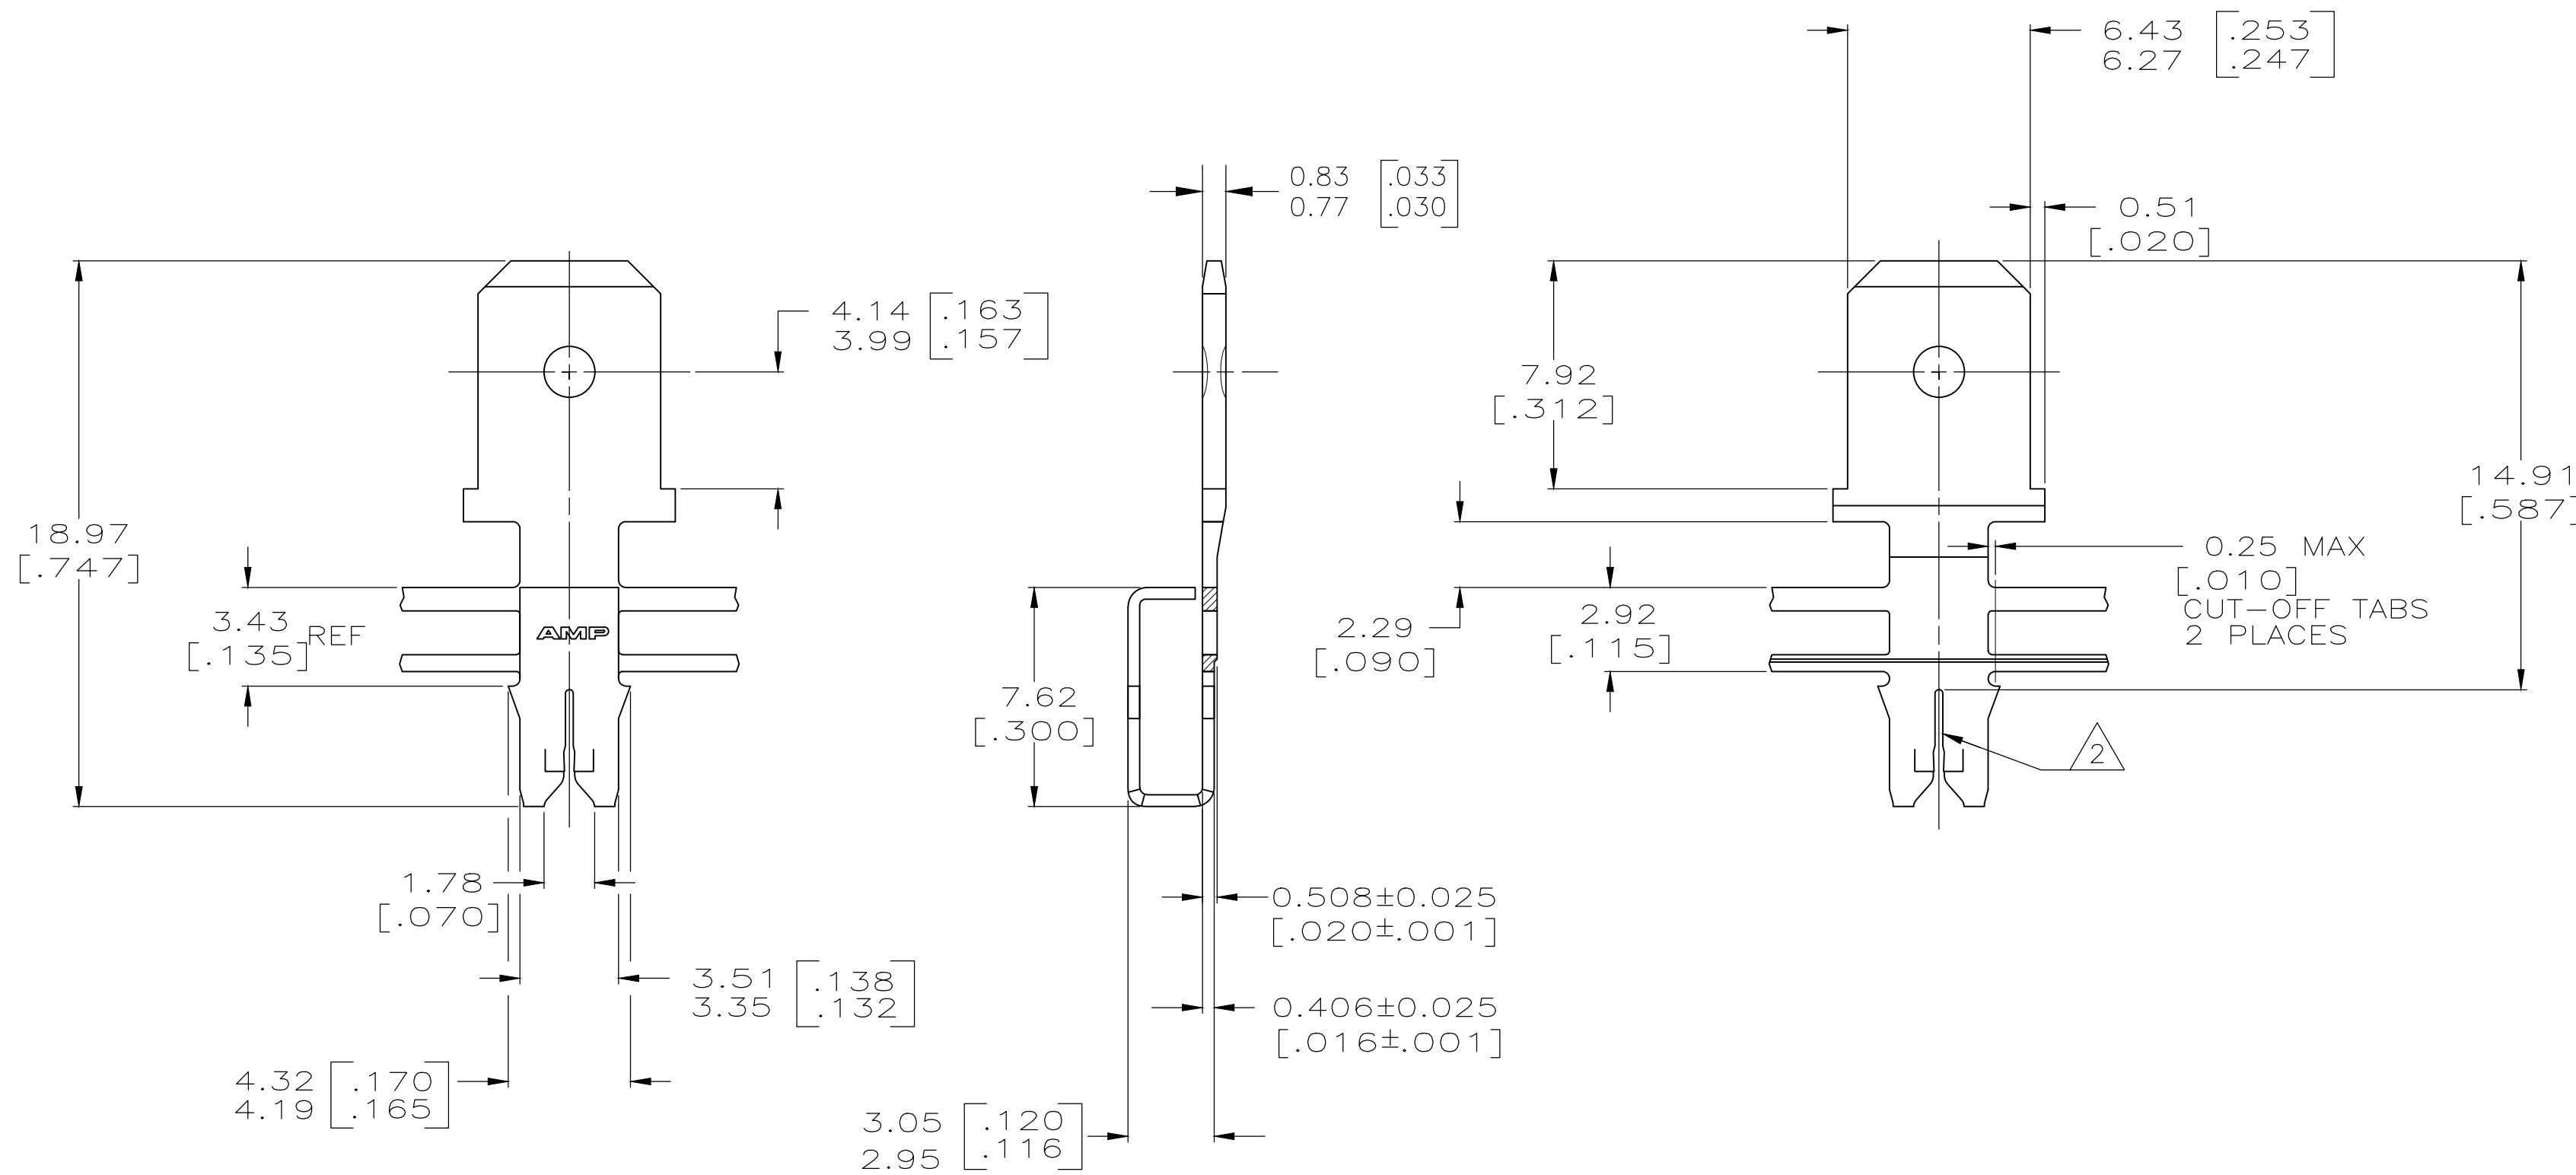

BOX DOWN TAB BACK	62652-2
BOX DOWN TAB FOWARD	62652-1
REELING, LEFT TO RIGHT	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 1/3/91 MICHAEL S. FEHER	TE Connectivity	
DIMENSIONS: INCHES		CHK 1/14/91 JEFF R. RUTH		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 1/14/91 NELSON E. NEFF	NAME TAB, 6.35 [.250] FASTON™ MAG-MATE™	
0 PLC ± - 1 PLC ± - 2 PLC ± 0.25 [.010] 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
MATERIAL BRASS		FINISH TIN PLATE	114-2046 A2 00779 C-62652	
		WEIGHT -	SCALE 5:1 SHEET 1 OF 1 REV N2	
		CUSTOMER DRAWING		

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)