
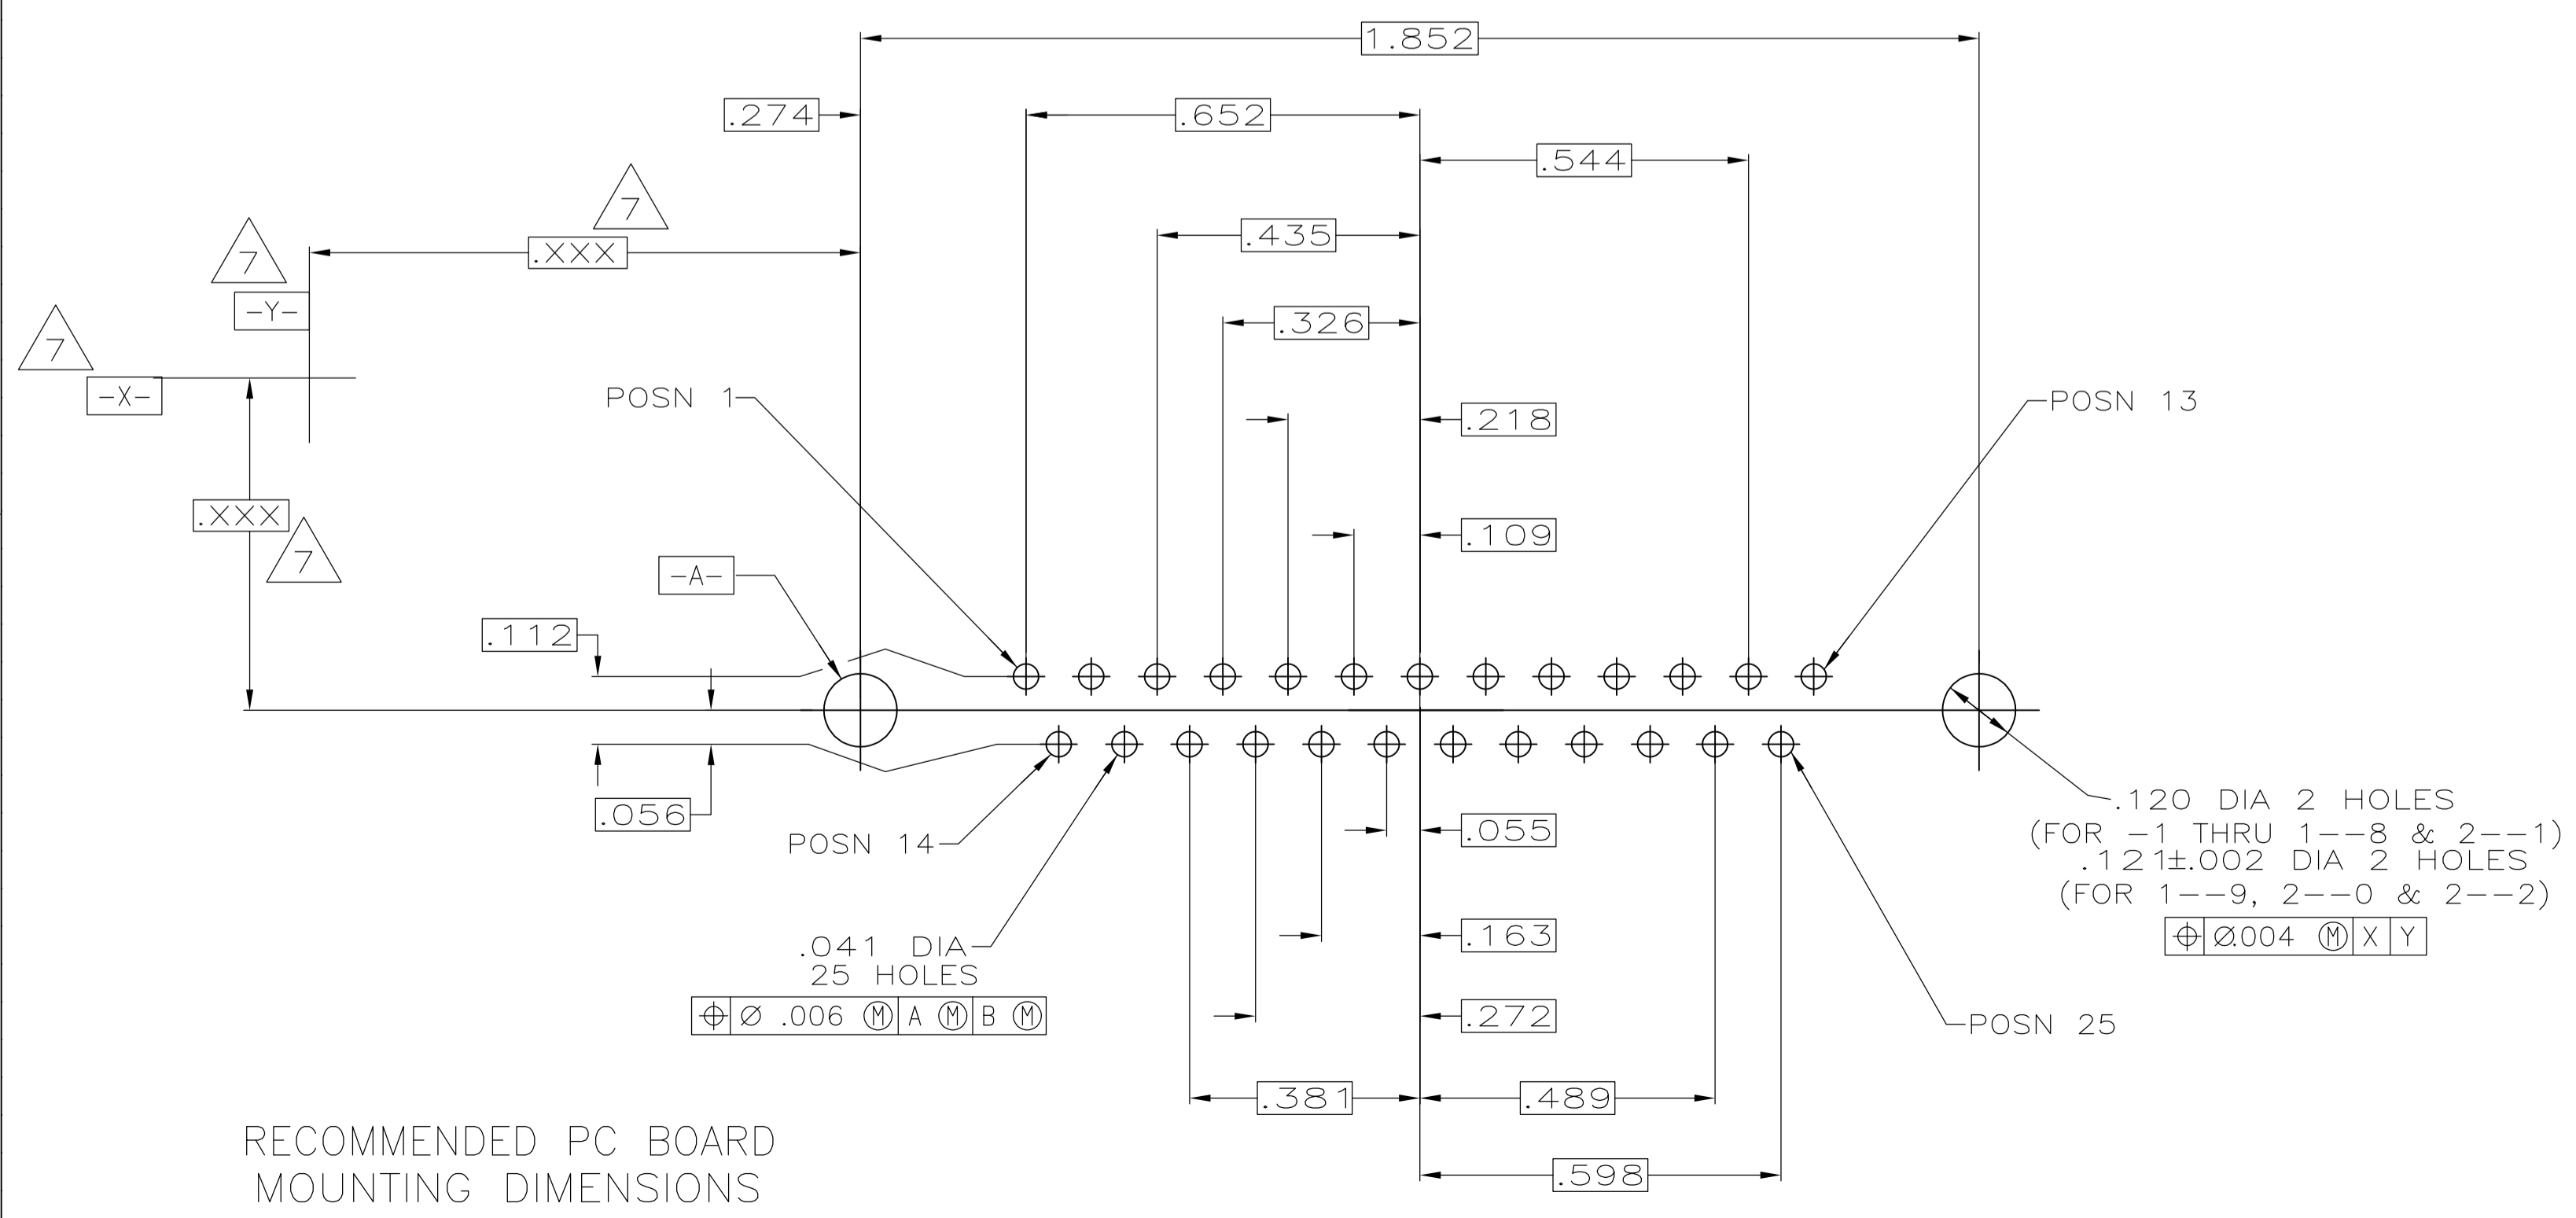
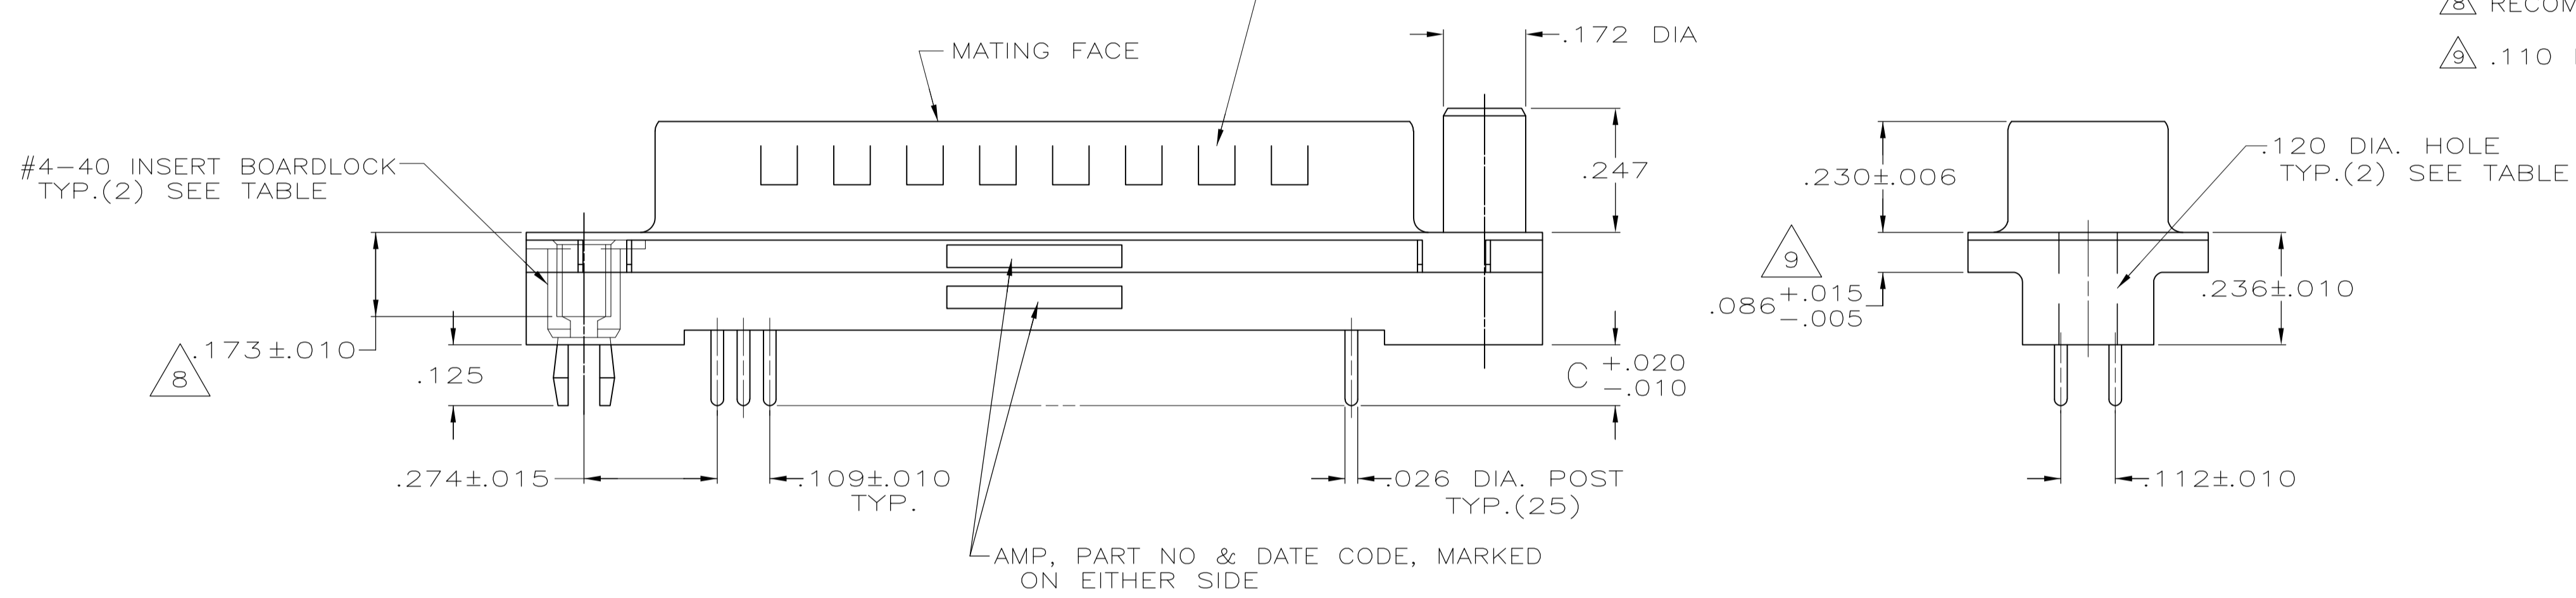


REVISIONS				
P	LTR	DESCRIPTION	DATE	APP'D
U		REVISED PER ECO-16-001548	24FEB2016	AP DG

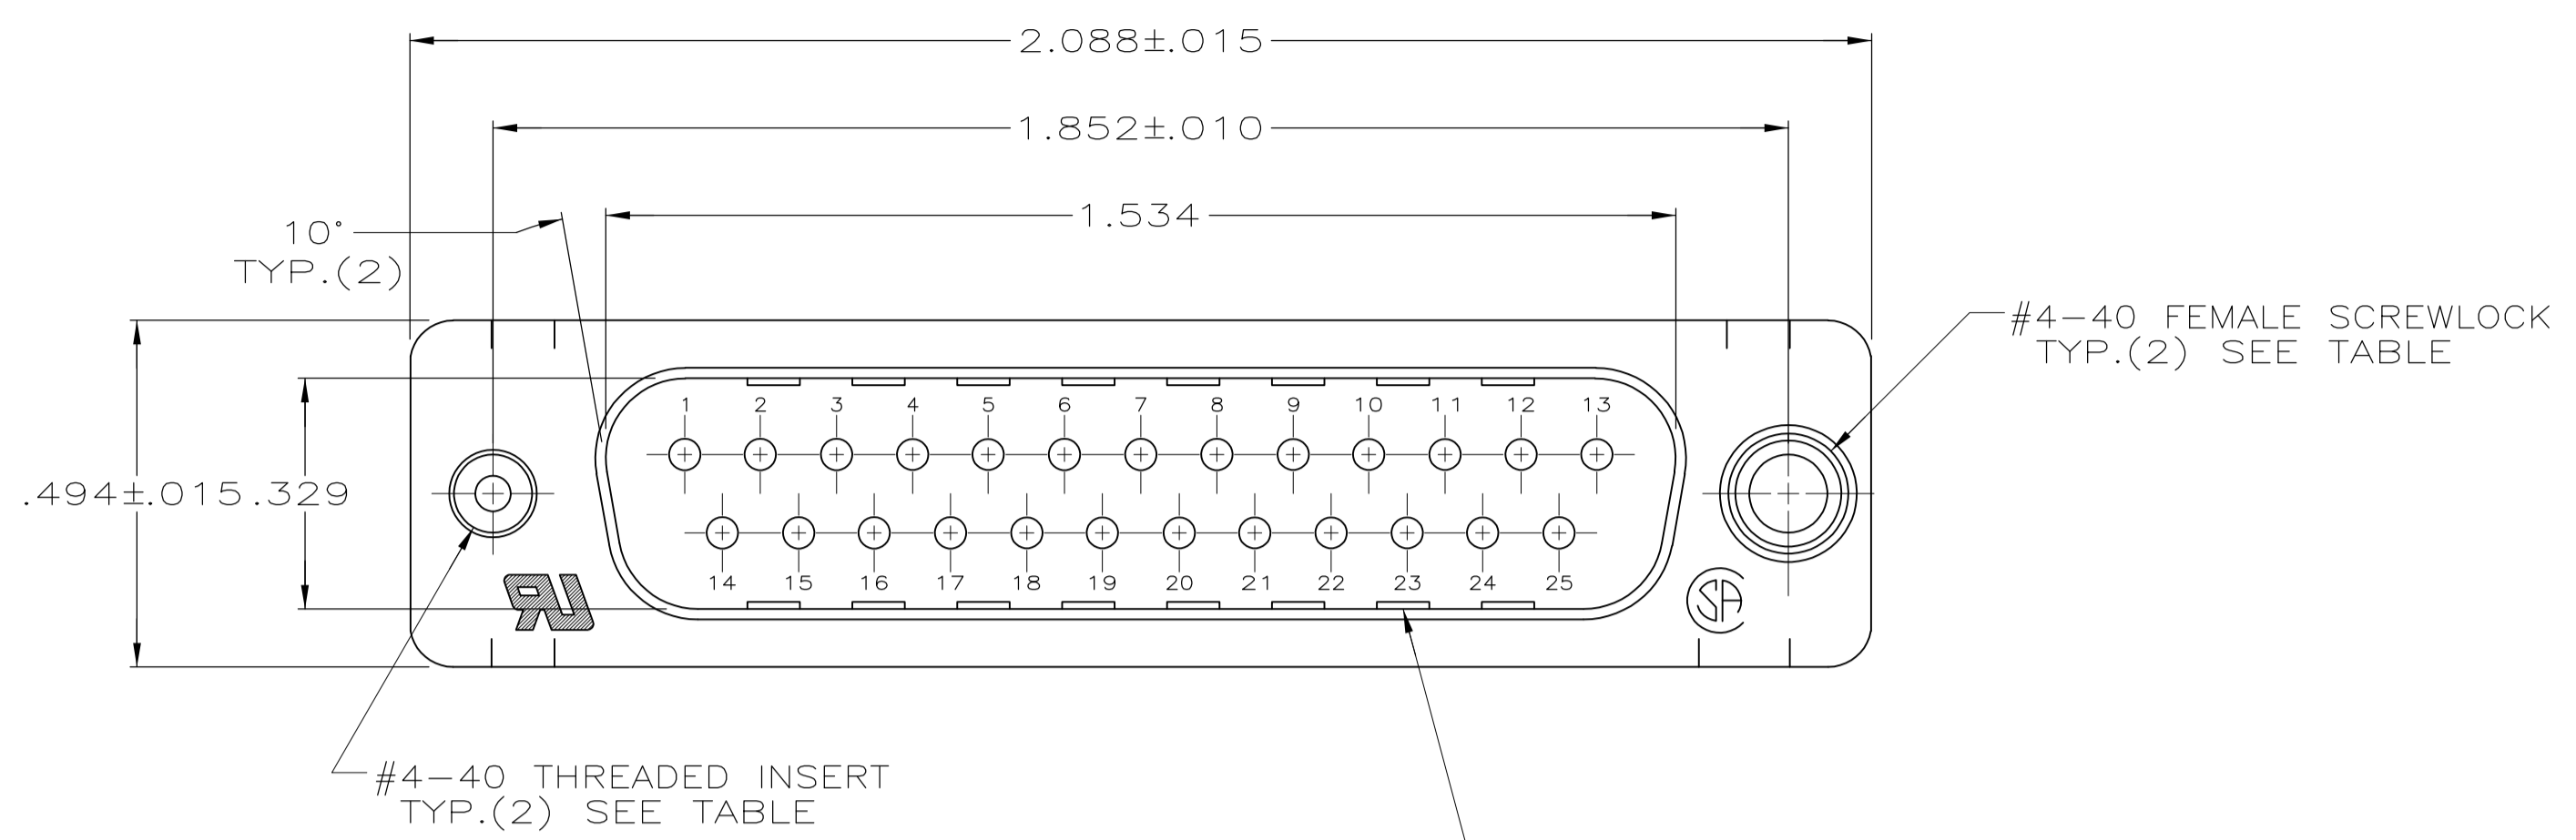

- △ HOUSING: FLAME RETARDANT 94V-0 RATED THERMOPLASTIC, COLOR BLACK  
SHELLS: STEEL  
CONTACTS: BRASS  
INSERTS & BOARDLOCKS: BRASS  
SCREWLOCKS: ZINC
- △ SHELLS: .000200 MIN TIN OVER .000100 MIN COPPER.  
INSERTS & SCREWLOCKS: UNPLATED  
BOARDLOCKS: .000150 MIN TIN OVER .000100 MIN COPPER.  
CONTACTS; SEE TABLE.
- △ GOLD FLASH FOR A LENGTH OF .150 MIN FROM MATING END, .000100-.000200 BRIGHT TIN OR BRIGHT TIN LEAD ON TERMINATION END, ALL OVER .000050 MIN NICKEL ON ENTIRE CONTACT.
- △ GOLD PLATED FOR A LENGTH OF .150 MIN FROM MATING END, .000100-.000200 BRIGHT TIN OR BRIGHT TIN-LEAD ON TERMINATION END, ALL OVER .000050 MIN NICKEL ON ENTIRE CONTACT.  
-OR-  
GOLD FLASH OVER PALLADIUM NICKEL PLATED FOR LENGTH OF .150 MIN FROM MATING END, .000100-.000200 MIN BRIGHT TIN OR BRIGHT TIN-LEAD ON TERMINATION END, ALL OVER .000050 MIN NICKEL ON ENTIRE CONTACT.
- 5. NOTE DELETED.
- △ CONTACTS SELECTIVELY LOADED IN POSITIONS 1 THRU 8 AND 10 THRU 25.
- △ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- △ RECOMMENDED SCREWLOCK IS 5747877-3 WITH RETENTION INSERTS.
- △ .110 MAX IN SHELL TAB CLINCH AREAS.

REMARKS	CONTACT FINISH	DIM C	PART NUMBER
△ 6 SUPERSEDED BY 2-747704-0 W/ INSERT BOARDLOCKS	△	.125	2-747704-2
SUPERSEDED BY 1-745968-6 WITH FEMALE SCREWLOCKS	△	.170	2-747704-1
SUPERSEDED BY 2-747704-0 WITH INSERT BOARDLOCKS	△	.125	2-747704-0
OBSOLETE	△	.125	1-747704-9
OBSOLETE	△	.250	1-747704-8
SUPERSEDED BY 1-745968-6 WITH FEMALE SCREWLOCKS	△	.250	1-747704-7
OBSOLETE	△	.170	1-747704-6
SUPERSEDED BY 1-745968-4 WITH FEMALE SCREWLOCKS	△	.170	1-747704-5
OBSOLETE	△	.125	1-747704-4
OBSOLETE	△	.125	1-747704-3
OBSOLETE	△	.250	1-747704-2
OBSOLETE	△	.250	1-747704-1
OBSOLETE	△	.170	1-747704-0
SUPERSEDED BY 745968-8 WITH THREADED INSERTS	△	.170	747704-9
OBSOLETE	△	.125	747704-8
OBSOLETE	△	.125	747704-7
OBSOLETE	△	.250	747704-6
OBSOLETE	△	.250	747704-5
OBSOLETE	△	.170	747704-4
OBSOLETE	△	.170	747704-3
OBSOLETE	△	.125	747704-2
OBSOLETE	△	.125	747704-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIN S. WELDON 2-27-85  
CIRK 2-27-85

APVD R. BRANDT 2-27-85

TE Connectivity

PLUG ASSEMBLY, SIZE 3, 25 POS., VERTICAL, .026 DIA. DUPLEX PLATED POSTS, FRONT SHELL, AMPLIMITE™HDP

108-40025

114-40023

SIZE A1

SCALE NTS

SHEET 1 OF 1

REV U

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)

[>>点击查看相关商品](#)