

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	4/23/18	J.B	T.L

Raychem SCL Heat - Shrinkable Tubing

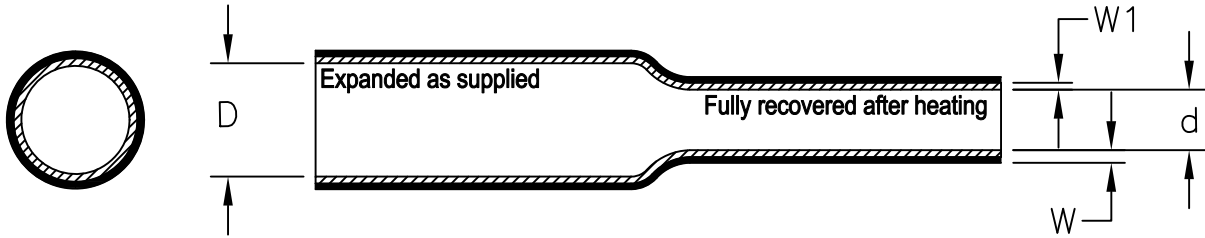


Table 1: Dimensions mm (inches)

Size	Additional Standard Color	As Supplied		Fully Recovered									
		Inside Diameter Minimum (d)		Inside Diameter Maximum (D)		Total Wall thickness (W)						Inner Meltable Wall Thickness (W1)	
		mm.	in.	mm.	in.	Minimum		Maximum		Nominal		Nominal	
1/8	Brown	3.17	0.125	0.58	0.023	0.81	0.032	1.11	0.044	0.96	0.038	0.5	0.020
3/16	Gray	4.74	0.187	1.52	0.060	0.93	0.037	1.24	0.049	1.09	0.043	0.64	0.025
1/4	White	6.35	0.250	2.03	0.080	1.04	0.041	1.34	0.053	1.19	0.047	0.68	0.027
3/8	Red	9.93	0.375	3.42	0.135	1.09	0.043	1.44	0.057	1.27	0.050	0.76	0.030
1/2	Blue	12.70	0.500	4.95	0.195	1.21	0.048	1.57	0.062	1.39	0.055	0.88	0.035
3/4	Yellow	19.05	0.750	7.95	0.313	1.47	0.058	1.82	0.072	1.65	0.065	1.01	0.040
1	N/A	25.40	1.000	10.16	0.400	1.72	0.068	2.08	0.082	1.90	0.075	1.01	0.040

Color: Jacket and core colors are black and as indicated in the table. Additional colors available upon request.

Reference Specification TEC-108-120027

THIS DRAWING IS UNPUBLISHED. ALL RIGHTS RESERVED. © COPYRIGHT 2018 TE Connectivity

DIMENSIONS: INCHES	DWN J. Bitter	01JAN2018	MATERIAL	-	FINISH	-
	CHK T. Licko	-				
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD T. Licko	-				
0 PLC ± -	PRODUCT SPEC	-	NAME Raychem SCL Heat-Shrinkable Tubing			
1 PLC ± -	APPLICATION SPEC	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
2 PLC ± -	WEIGHT	-	A4	06090	© = SCL	-
3 PLC ± -			SCALE None			SHEET 1 OF 1
4 PLC ± -			CUSTOMER DRAWING			REV A
ANGLES ± -						

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)