

REV. D
DCO 301385


TOLERANCES $\pm .010''$ - UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C	
RESISTANCE	500 OHMS $\pm 10\%$
NOMINAL VOLTAGE	28 VDC
MUST OPERATE	13.5 VDC MAX.
TRANSIENT SUPPRESSION - 42 VDC MAX.	
MUST RELEASE	5.5 VDC MAX., 2.3 VDC MIN.

ENVIRONMENT:	10	55	.06" DA
	55	500	10 g's
VIBRATION	500 Hz	TO 3000 Hz	@ 20 g's
SHOCK	50 g's	11 MS. DURATION	
TEMPERATURE	-70 °C	TO +125 °C	

NOTES: OPERATE, RELEASE 5 MS MAX.
CONTACT STABILIZATION 2.5 MS MAX.
CONTACT BOUNCE 1 MS MAX.
CONTACT BREAK BOUNCE 0.1 MS MAX.

CUSTOMER DATA SHEET

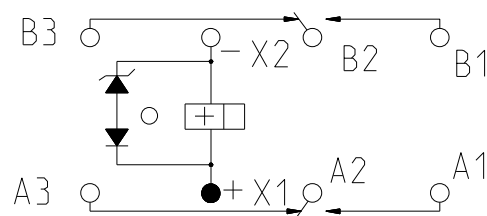

TERMINAL VIEW

CONTACT RATING: LOW LEVEL
TO 5 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE,
100,000 OPERATIONS

DR. R.F. 25APR2011 | CK. M.B. 26APR2011



CUST. QPL
CUST. NO. M83536/2-028M REV.

TE NUMBER
5-1617758-4

CII PART NUMBER
FCB-205-0228M

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)