

# SPECIFICATION CONTROL DRAWING


**55FB1532**

TITLE THREE CONDUCTOR CABLE, SHIELDED, JACKETED, FILTER LINE - ELECTROLOSS

Date 1-23-09

Revision A

This specification sheet forms a part of the latest issue of Raychem Specification 55F.

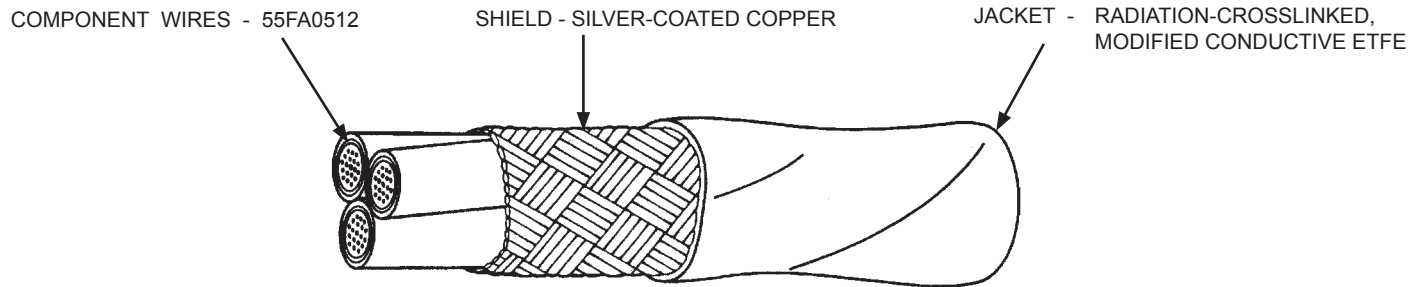

CABLE CONSTRUCTION DETAILS							JACKET FLEXURE ENDURANCE MANDREL DIAMETER (in.) (± 3%)	
PART NUMBER 1/	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		OUTSIDE DIAMETER (in.)			MAXIMUM WEIGHT (lbs/1000 ft.)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM		
55FB1532-22-*	22	38	.0060	.008	.142	.154	20.9	.250
55FB1532-20-*	20	38	.0060	.008	.159	.171	27.6	.250
55FB1532-18-*	18	38	.0060	.008	.183	.195	38.0	.325
55FB1532-16-*	16	38	.0060	.008	.201	.214	47.0	.325
55FB1532-14-*	14	38	.0070	.009	.239	.253	65.1	.325
55FB1532-12-*	12	38	.0070	.009	.277	.291	91.9	.500
55FB1532-10-*	10	38	.0080	.010	.331	.347	136.	.750

### CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C  
 Maximum continuous conductor temperature  
 VOLTAGE RATING: 600 volts (rms) at sea level  
 BLOCKING: 200 ± 3°C for 6 hours  
 CROSSLINKING PROOF TEST: 300 ± 3°C for 7 hours  
 FLAMMABILITY: 3 seconds (maximum); 3 in. (maximum); no flaming of facial tissue  
 IDENTIFICATION AND COLOR STRIPING DURABILITY: 125 cycles (250 strokes) (minimum), 500 g weight  
 JACKET COLOR: Black  
 JACKET ELONGATION AND TENSILE STRENGTH:  
 Elongation, 50% (minimum)  
 Tensile Strength, 3500 lbf/in<sup>2</sup> (minimum)

JACKET FLAWS: Not Applicable  
 JACKET FLEXURE ENDURANCE: 10 cycles, no cracking  
 LIFE CYCLE: 230 ± 3°C for 500 hours  
 LOW TEMPERATURE-COLD BEND: -65 ± 2°C for 4 hours  
 SHIELD COVERAGE: 85% (minimum)  
 VOLTAGE WITHSTAND (DIELECTRIC):  
 Conductor to conductor and shield, 1500 volts (rms), 60 Hz  
 VOLTAGE WITHSTAND (Post Environmental): Not Applicable

PART NUMBER:  
 The "\*" in the part numbers above shall be replaced by color code designators with a slash separating the component wire colors and a dash separating the component wire colors from the jacket color. Violet shall be light violet and the designator shall be 7L. Colors shown do not necessarily reflect the sequence of manufacturing.

NOTE: Nominal values are for information only.  
 Nominal values are not requirements.

Example: AWG 22, light violet, light violet with an orange stripe and light violet with a blue stripe component wires, black jacket:  
 55FB1532-22-7L/7L3/7L6-0

Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice.  
 Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.

1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. HOWEVER, DUE TO LENGTH LIMITATIONS OF THE RAYCHEM PART NUMBER, AN ALTERNATIVE COLOR CODE MAY REPLACE MIL-STD-681 COLOR CODE DESIGNATORS. (EXAMPLE: "901/902..." MAY BE REPLACED BY "Axxx") OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.

Page 1 of 1	The TE logo, Tyco Electronics, Electroloss and Raychem are trademarks.		Raychem Wire & Cable 501 Oakside Avenue Redwood City, CA 94063-3800 Phone: 1-800-227-8816 Fax: 1-650-361-6297
	DIMENSIONS ARE IN INCHES, AND UNLESS OTHERWISE DESIGNATED ARE NOMINAL		
	THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.		

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)