


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
AC1		REVISED PER ECO-14-008433	05JUN2014	NK MZ
AD		REVISED PER ECO-17-000037	10MAR2017	RS MZ

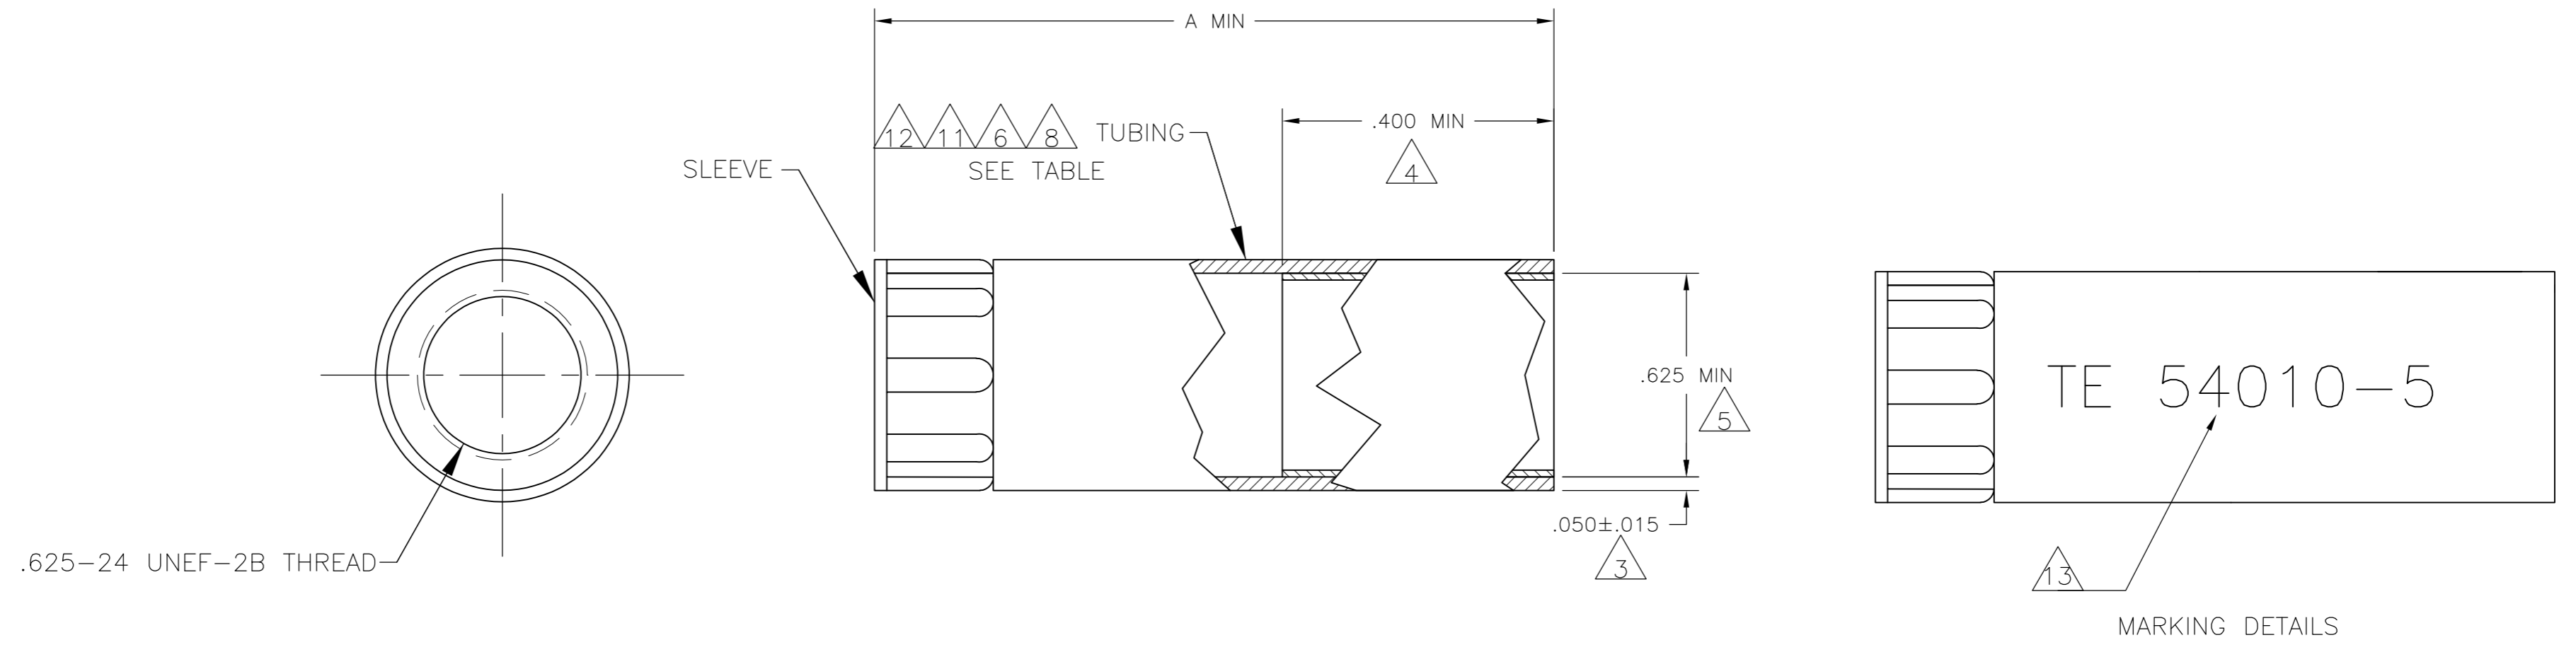

- 1 POLYOLEFIN, BLACK.
- 2 NYLON, BLACK.
- 3 NOMINAL WALL THICKNESS, EXPANDED.
- 4 LENGTH OF SEALANT.
- 5 EXPANDED INSIDE DIAMETER.
- 6 6.35[.250] MAXIMUM RECOVERED INSIDE DIAMETER.
- 7 ASSEMBLY WILL PASS 0.0703 KG PER SQ CENTIMETER [ONE POUND PER SQ IN.] WATER PRESSURE TEST.
- 8 121°C [250°F] SHRINK TEMPERATURE.
- 9 -55°C TO 110°C [-67°F TO 230°F] OPERATING TEMPERATURE.
- 10 THIS PART WILL ACCOMODATE  $\phi 6.35 - \phi 15.24$  [ $\phi .250 - \phi .600$ ] CABLE RANGE.
- 11 4.06 [.160] MAXIMUM RECOVERED INSIDE DIAMETER.
- 12 ACTUAL SHAPE MAY VARY DUE TO PROCESS VARIANCE.
- 13 SEE P/N CHART FOR MARKING. WHITE CHARACTERS .150 MIN HIGH AND LOCATED ON THE OUTSIDE SURFACE OF THE TUBING.
- 14 OBSOLETE PART.

TE 54010-5	6 8	2.25	14 54010-5
NONE	11 8	2.25	54010-4
NONE	6 8	1.25	54010-2
NONE	6 8	2.25	54010-1
MARKING	RECOVERED INSIDE DIS	A	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	C.REIFSNYDER	09 APR 96	<b>TE</b> TE Connectivity
CHK	R.STONE	15 APR 95	
APVD	T.A.WETZEL	03 MAY 96	
PRODUCT SPEC	NAME		
APPLICATION SPEC	NAME		STRAIN RELIEF ASSY, SHELL SIZE 11, CPC
WEIGHT	-	SIZE	A2
CUSTOMER DRAWING	SCALE	CAGE CODE	00779
	2:1	DRAWING NO	C=54010
		SHEET	1 of 1
		REV	AD

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)