
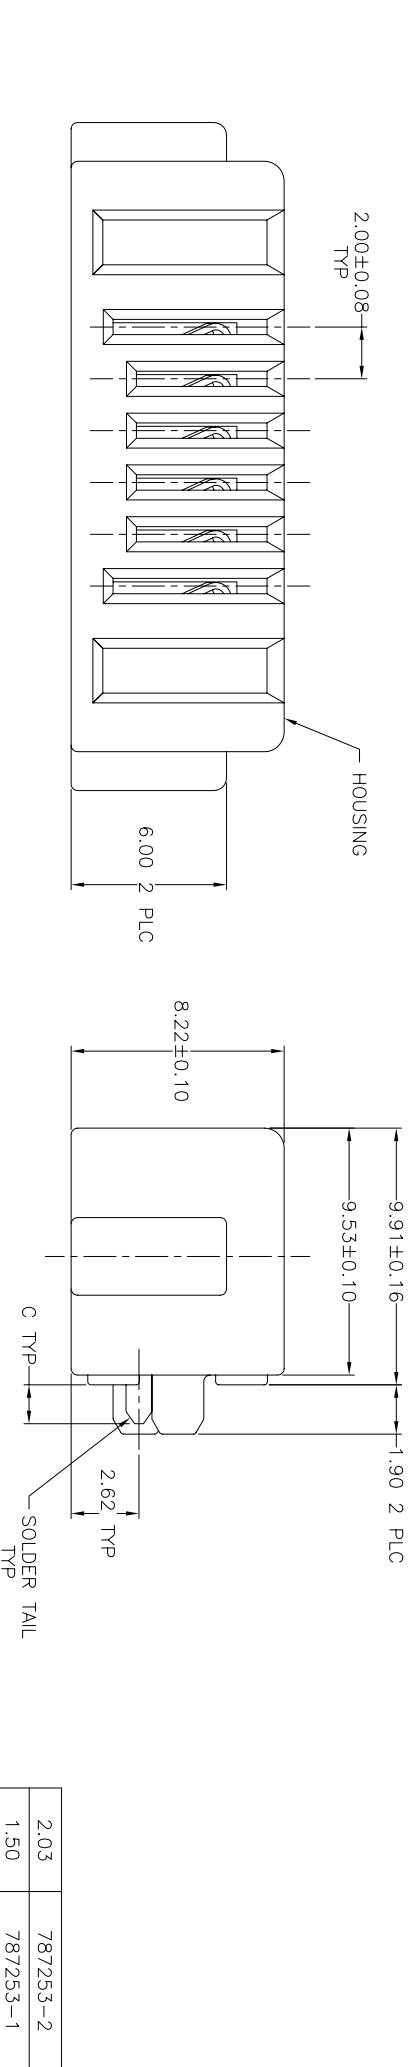


THIS DRAWING IS UNPUBLISHED.
 RELEASED FOR PUBLICATION
 BY TYCO ELECTRONICS CORPORATION
 ALL RIGHTS RESERVED.

LOC	DIST	REVISONS		DATE	DMN	APP'D
ES 00	P	LTR	DESCRIPTION	27JAN05	LZ	LE
	L		REVISED FB00-0016-05			

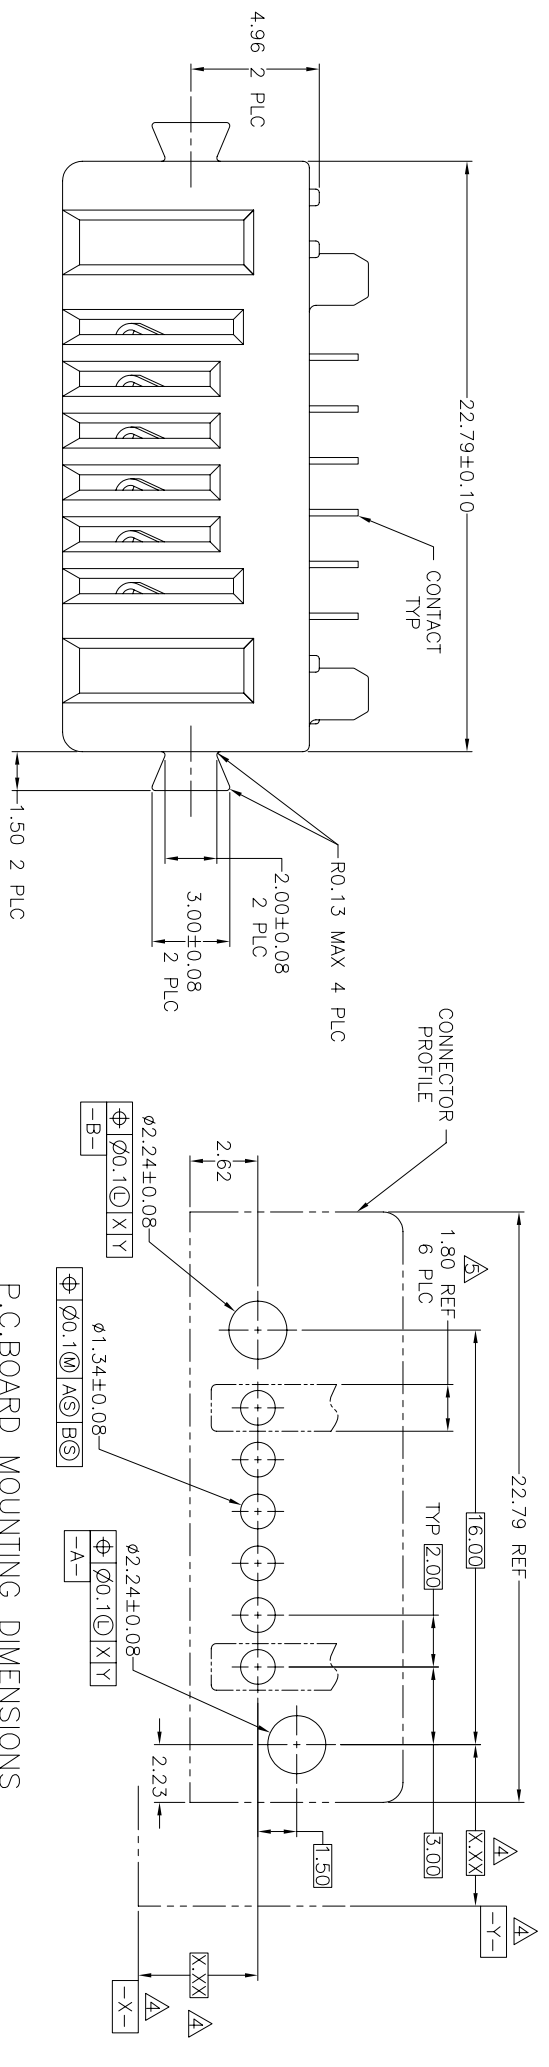

2.03	787253-2
1.50	787253-1
C	PART NO.

△ PCT, UL 94V-0 RATED, BLACK.

△ PHOSPHOR BRONZE.

△ 0.076um MIN. GOLD OVER 0.76um MIN. PALLADIUM NICKEL ON MATING AREA, 3.80um MIN. TIN-LEAD ON SOLDER TAIL, ALL OVER 1.27um MIN. NICKEL.

△ DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.

△ RECOMMENDED MINIMUM TRACE WIDTH FOR END POSITIONS WHEN CARRYING 3 AMPS: 1.8 WIDE x 55um THICK, BOTH SIDES.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN	22JUN94	M.E. SHIRK
CHK	22JUN94	WAYNE DAVIS
APP'D	30JUN94	A. TRAVIS
PRODUCT SPEC		
APPLICATION SPEC		
WEIGHT		
CUSTOMER DRAWING		

TYCO Electronics Corporation
 Shanghai, P.R.China, 200233

RECEPTACLE ASSEMBLY,
 6 POSITION, THRU-HOLE, MDI

SIZE: A3
 CAGE CODE: 00779
 DRAWING NO: 787253

SCALE: 5:1
 SHEET: 1 OF 1
 REV: L

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)