


LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	J	REVISED PER ECO-15-007761		28MAY2015	RL	DM	
	K	REVISED PER PCN E-20-008101		12JUN2020	DM	DM	

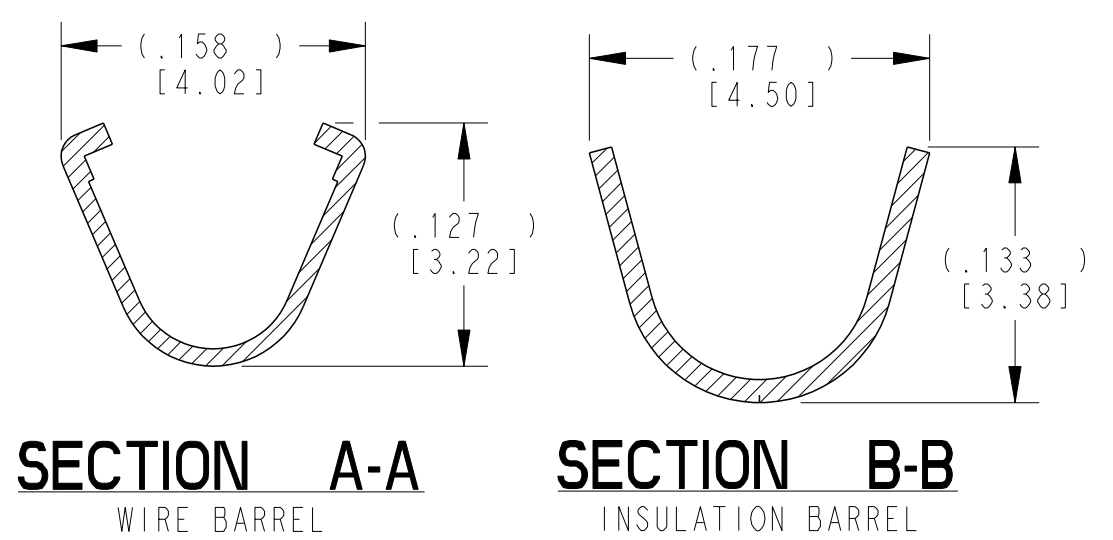

TE INTERNAL PN	DEUTSCH PN	PLATING
1060-16-0122	1060-16-0122	Ni/Cu overall, Sn/Ni/Cu Wire Barrel
1060-16-0144	1060-16-0144	Selective Au, Ni/Cu overall, Sn/Ni/Cu Wire Barrel
1060-16-0177	1060-16-0177	Sn/Ni/Cu overall

- 5 TIN PLATING MAY BE IN THIS REGION.
  - 4 TIN PLATED REGION.
  - 3 MATERIAL: .012 [0.30] THICK COPPER ALLOY
  - 2. WIRE RANGE: 18 AWG TO 14 AWG [0.75-2.0 mm<sup>2</sup>]  
INSULATION RANGE:  $\varnothing$ .075-.140 [ $\varnothing$ 1.91-3.56]
  - 1 GOLD PLATED REGION.
- NOTES: UNLESS OTHERWISE SPECIFIED

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN M. BLUM 04NOV1999  
CHK A. ROLINSKI 08DEC2000  
APVD R. REED 08DEC2000

TE Connectivity

NAME STAMPED CONTACT  
PIN  
SIZE 16

SIZE A3 CAGE CODE 4AFU8 DRAWING NO C-1060-16-01XX RESTRICTED TO -

WEIGHT 0.33 g

Customer Drawing SCALE 6:1 SHEET 1 OF 1 REV K

DIMENSIONS: INCHES [mm]

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±.025 [0.64]
4 PLC	±
ANGLES	±

MATERIAL 3 FINISH SEE TABLE

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)