


| | | | | | | | |
|-----|------|----------------|-----|-------------|-----------|-----|------|
| LOC | DIST | REVISONS 変更 | | | | | |
| J | - | P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | | 0 | | RELEASED | 10NOV2004 | T.K | D.M |

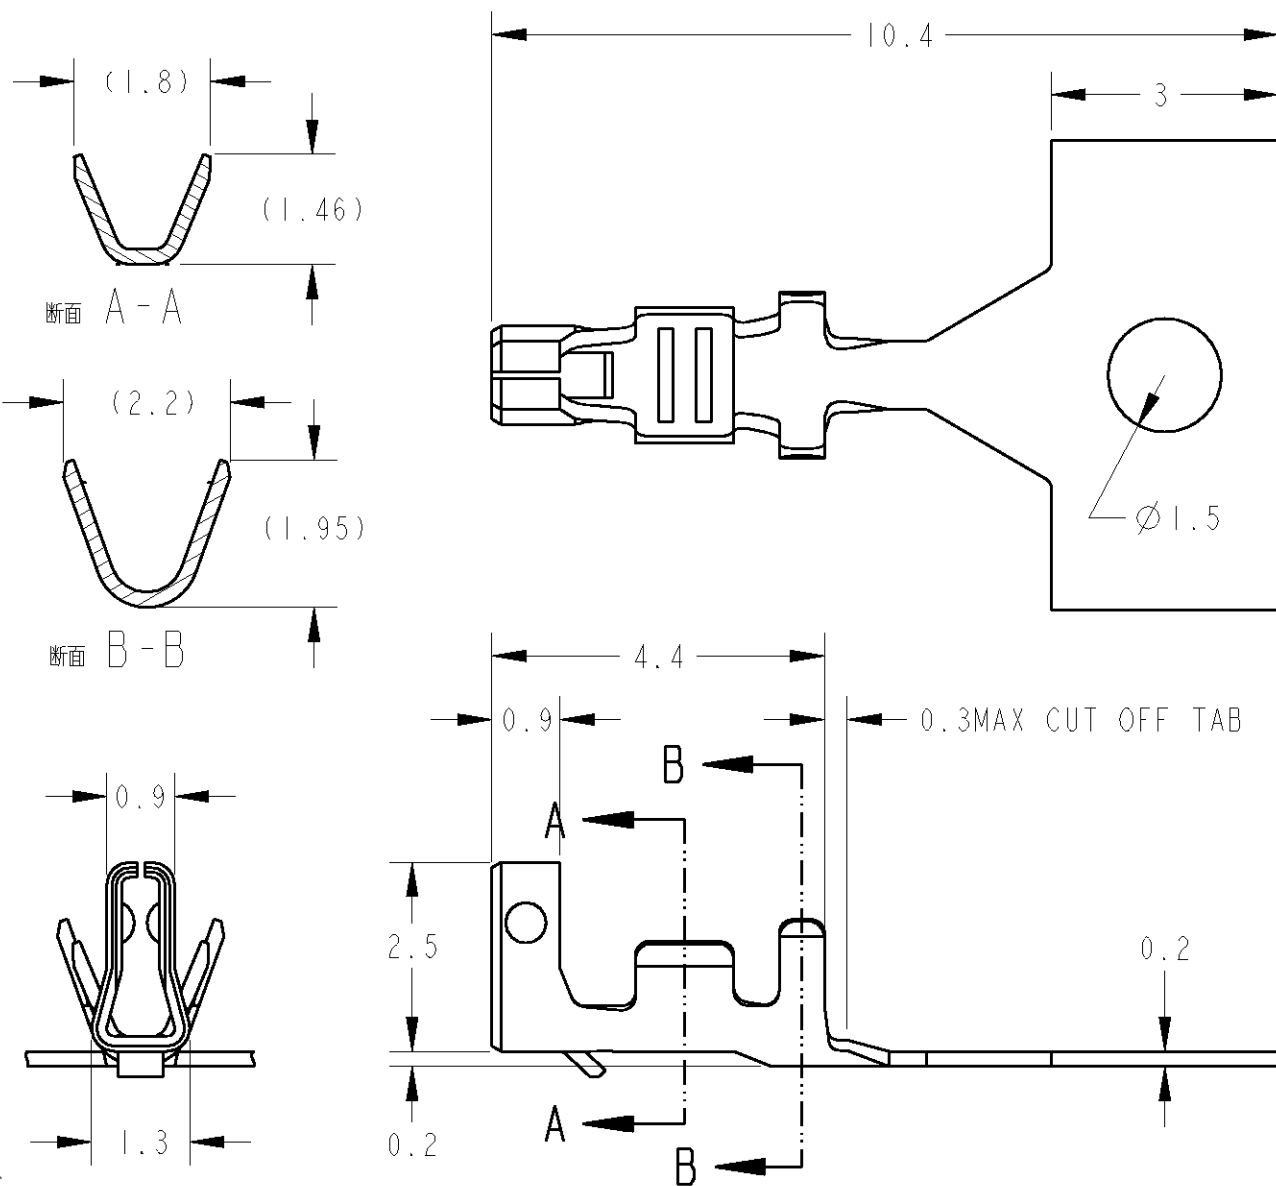

NOTES

1. MATERIAL: COPPER ALLOY, FINISH: OVER Ni PLATING 1.27 μ m MIN.
CONTACT AREA 0.2 μ m MIN GOLD PLATING.
2. APPLICABLE WIRE: AWG#26-#22 (INS DIA ϕ 1.0- ϕ 1.2)

注記

1. 材料: 銅合金 全面Niめっき1.27 μ m以上
接点部金めっき0.2 μ m以上
2. 適用電線: AWG#26-#22(被覆外形 ϕ 1.0- ϕ 1.2)

1674335-4

PART No.

| | | | | | | |
|---|----------------------------|--------------|---|--------------|------------------|---------------|
| DIMENSIONS: 単位: 概 mm | DWN T. KUDO | 10NOV2004 | MATERIAL 材料 | COPPER ALLOY | FINISH 仕 | SEE NOTES |
| | CHK D. MITSUGI | 10NOV2004 | Tyco Electronics AMP K.K Kawasaki, Japan | | | |
| TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 $\pm 0.3, \pm 3^\circ$ 0 PLC \pm 1 PLC ± 0.1 2 PLC ± 0.01 3 PLC ± 0.001 4 PLC ± 0.0001 ANGLES \pm | APVD D. MITSUGI | 10NOV2004 | | | | |
| | PRODUCT SPEC 製品規格 | 108-5864 | SIZE | CAGE CODE | DRAWING NO 番号 | RESTRICTED TO |
| | APPLICATION SPEC 取付適用規格 | 114-5335 | A4 | 00779 | C=1674335 | - |
| | WEIGHT | | CUSTOMER DRAWING | | | |
| SCALE 10:1 | | SHEET 1 OF 1 | | REV 0 | | |

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)