




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REV/ 0720-0612-95	31MAY95	-	ME
	C1	REVISED PER ECO-17-014338	29MAR2018	RS	DR
	C2	REVISED PER ECO-20-017411	10DEC2020	RK	DR

 E13288 Listed
16-14 AWG SOLID OR STRANDED

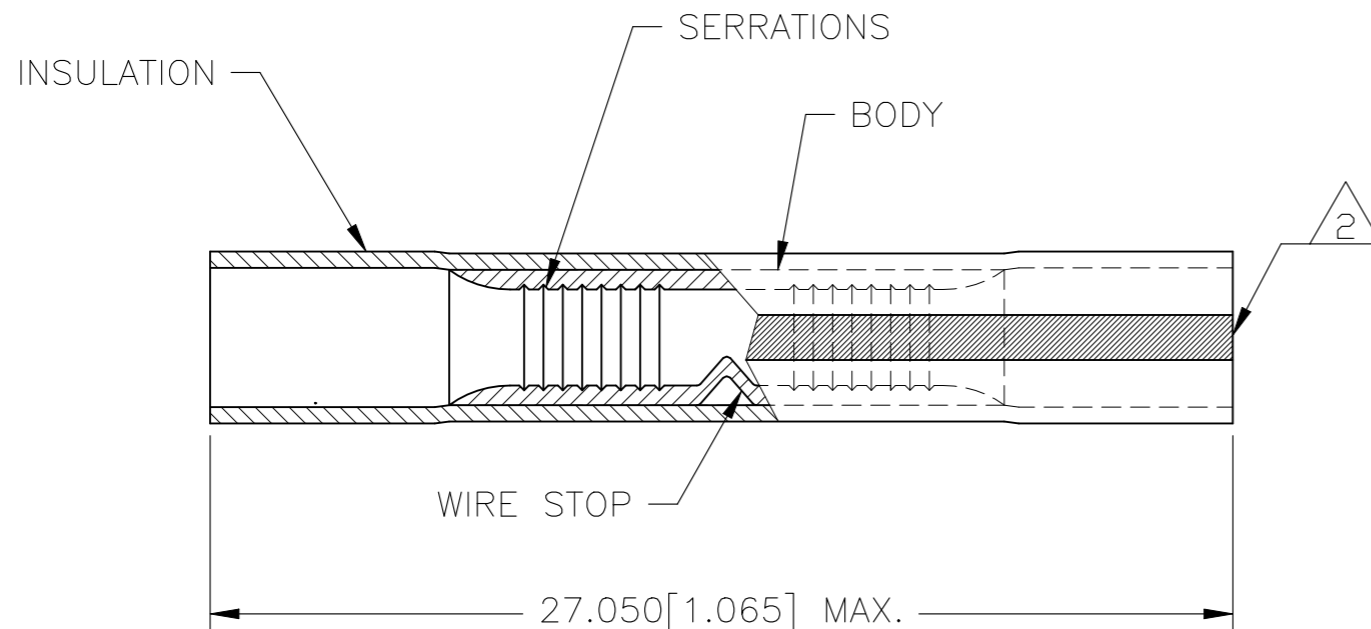

- 1. WIRE INSUL DIA, 2.921-4.318 [.115-.170]
- △2 INSULATION STRIPES: 2 - 180 DEGREES APART.
- △3 MATERIAL: BODY - COPPER PER ASTM B152
INSULATION - PVC
- △4 FINISH: BODY - TIN PLATE 0.00254 [.000100] MIN
EXT THK PER ASTM B545
INSULATION COLOR - TRANSPARENT BLUE
INSULATION STRIPE COLOR - BLUE

2500	ON TAPE, REEL	55785-2
1000	LOOSE PIECE	55785-1
QTY	PACKAGE TYPE	PART NO

MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221° F]	THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN DK SCHRUM 4/12/90	 TE Connectivity			
	DIMENSIONS: mm [INCHES]		CHK MS FEHER 4/16/90				
	VOLTAGE RATING: 600V MAX (1000V FIXTURE OR SIGN)		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± -	APVD TL SHUTTER 4/17/90	NAME SPLICE, BUTT, PLASTI-GRIP, WIRE SIZE, 16-14 AWG		
				MATERIAL △3	FINISH △4	PRODUCT SPEC UL 486A-B	APPLICATION SPEC 114-2161
CIRVULAR MIL AREA: 1.04-2.62mm²[2.050-5.180] SOLID OR STRANDED			WEIGHT -	A3	00779	C-55785	-
			CUSTOMER DRAWING		SCALE 5:1	SHEET 1 OF 1	REV C2

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)