


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION ,19 .
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
DF	50					REV PER 063D-0222-03 CT	2-04	DE

PART NO.	A	B	C
867657-1	P2 (2A3J5)	W5 13084009	P1 (2A1J1)

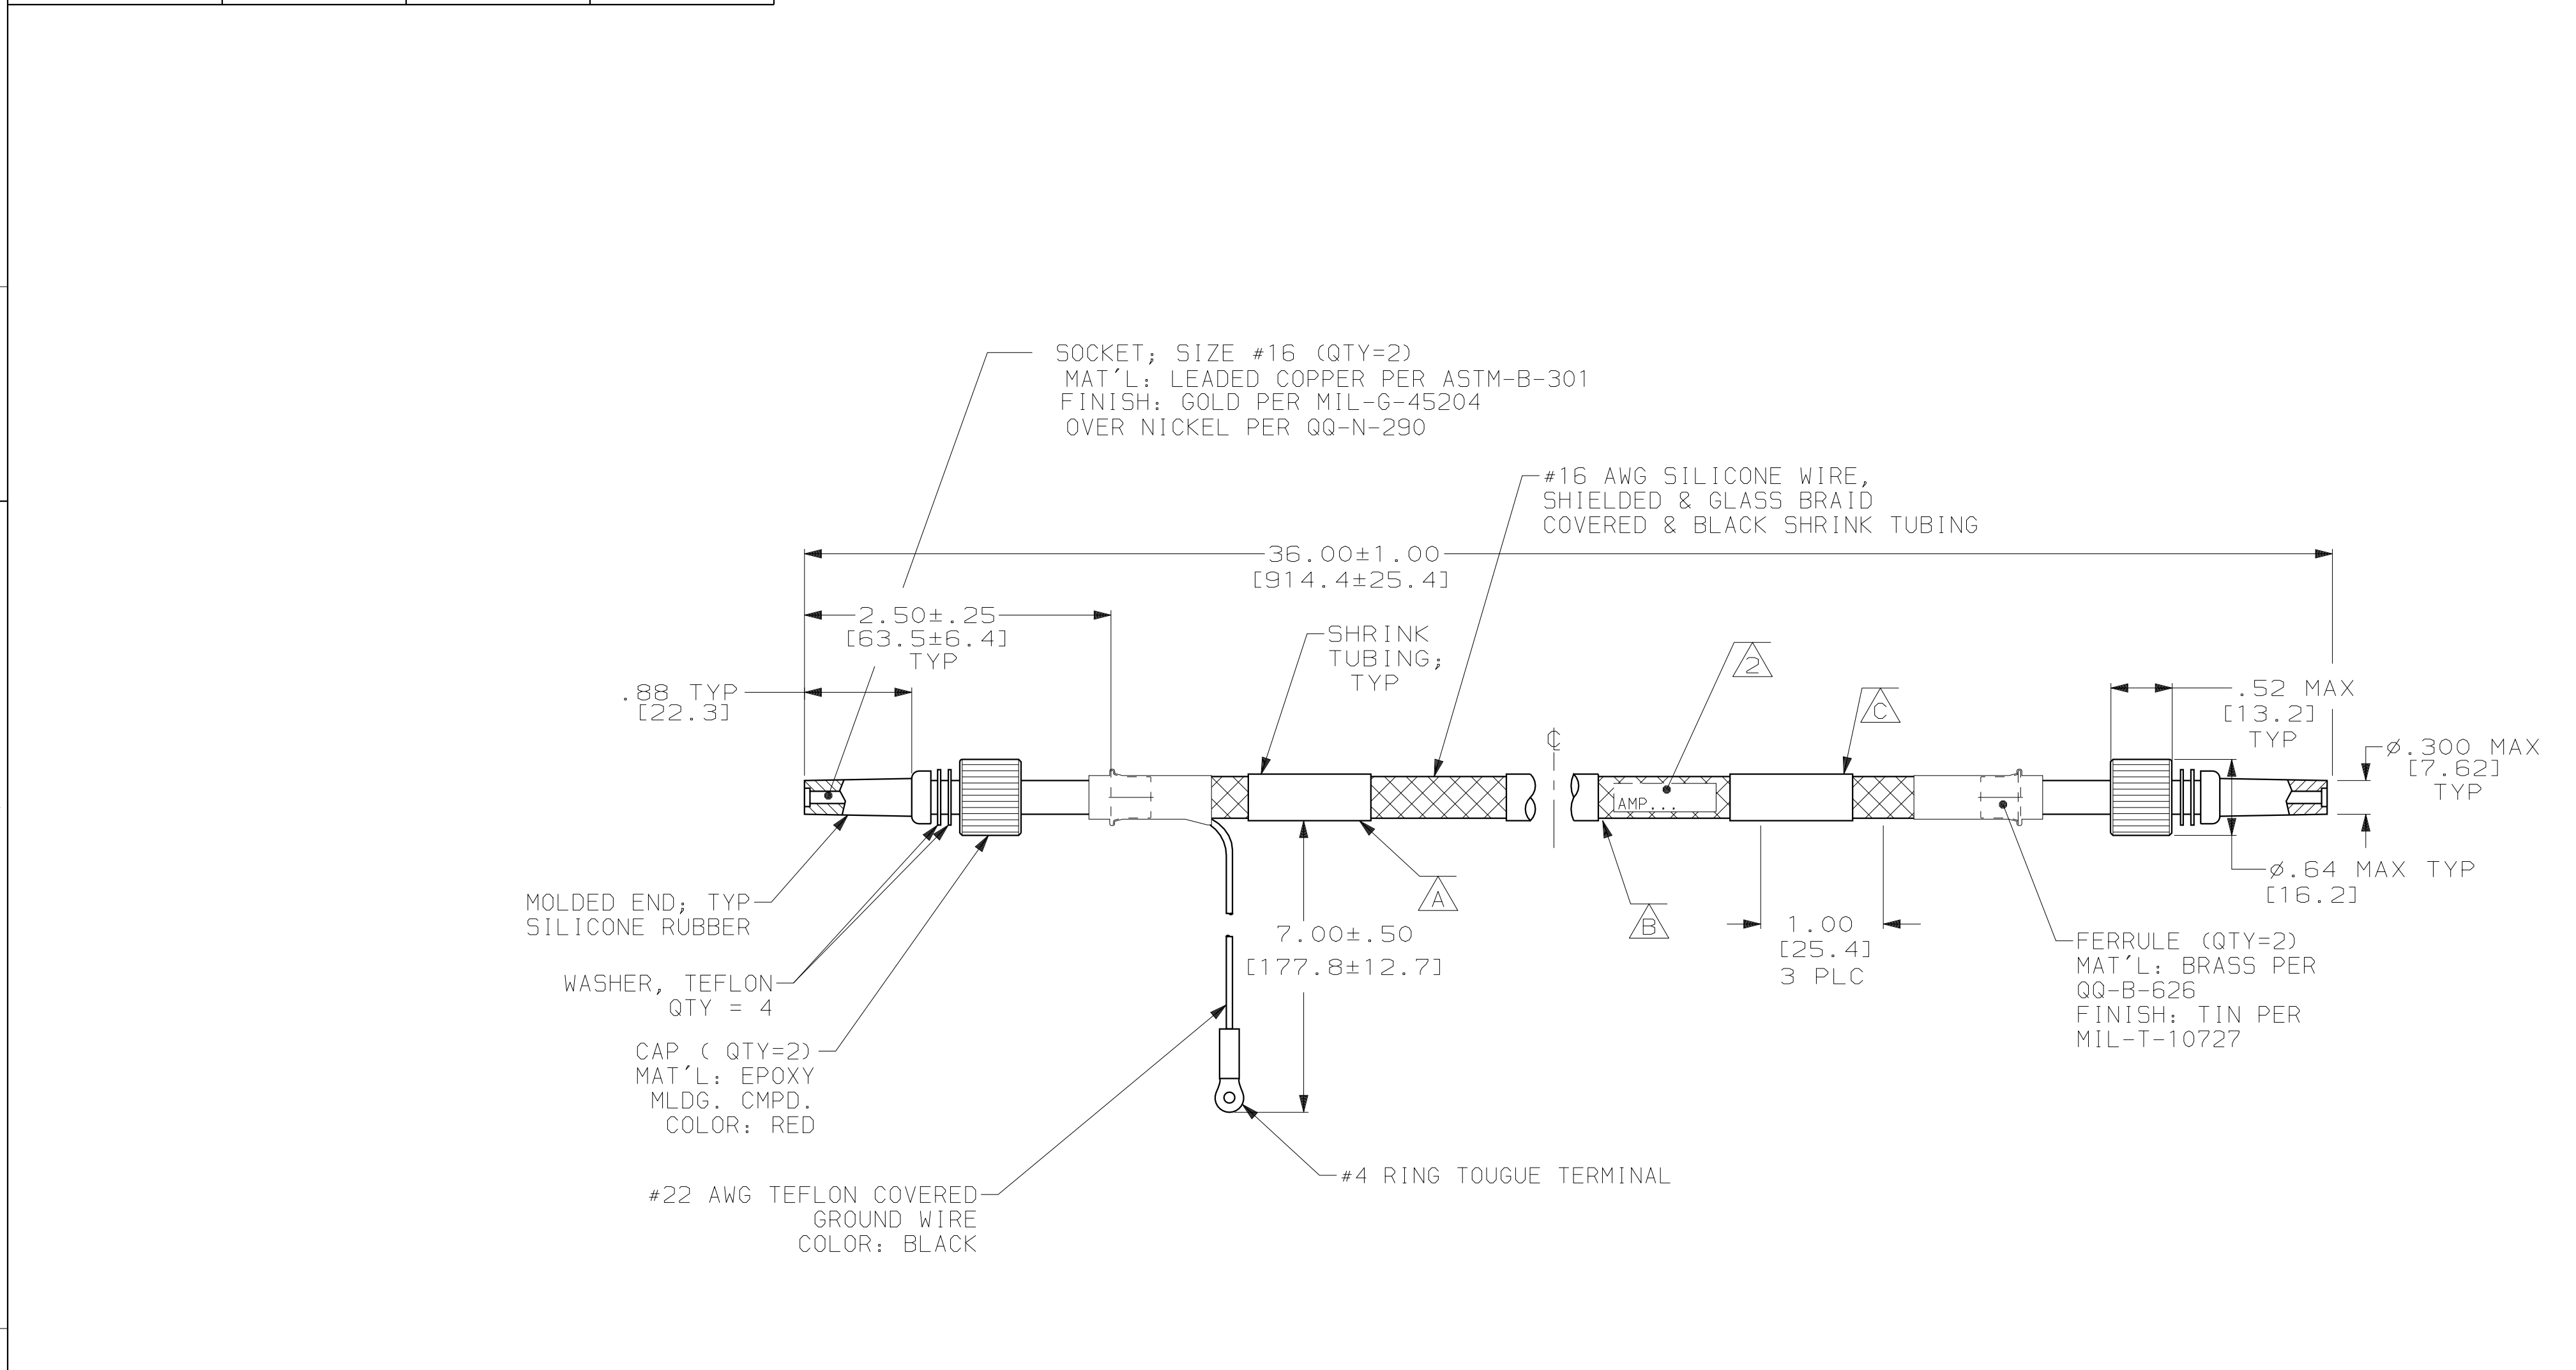

- 1 TOLERANCE OF LEAD LENGTH:
UP TO 24 INCHES [609.6] = ±.12 [±3.0]
24 INCHES [609.6] & UP = ±1%
- 2 MARKED PER MIL-STD-130 INCLUDING CUST MARKING PER TABLE.
- 3. TO MATE WITH AMP LGH-1 RECEPTACLE WITH .88 [22.3] BARREL DEPTH.
- 4. OPERATING VOLTAGE: 20 KVDC AT 0 TO 70,000 FEET, -55°C TO 125°C.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm] TOLERANCES ON : 2 PLC DEC ± .02 [0.5] 3 PLC DEC ± _____ ANGLES ± _____	DR 5-3-94 C.C.THOMAS	AMP INCORPORATED Harrisburg, Pa. 17105	
	CHK 5-10-94 D.EABY		
MATERIAL SEE CALLOUTS	APPD 5-10-94 D.EABY	NAME LEAD ASS'Y, DBL. END, LGH-1 SHIELDED & GLASS BRAID JACKET	
	APPD 5-10-94 C.C.THOMAS	DRAWING NO 867657	
FINISH SEE CALLOUTS	PRODUCT SPEC -	SIZE C	CAGE CODE 00779
	APPLICATION SPEC -	SCALE 1:1	SHEET 1 OF 1
	WEIGHT -		

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)