



LOC	DIST	ZONE	LTM	DESCRIPTION	DATE	APPD
G	14			REVISED PER 0720-0230-93		

REVISIONS	
DESCRIPTION	DATE
	2/28/93

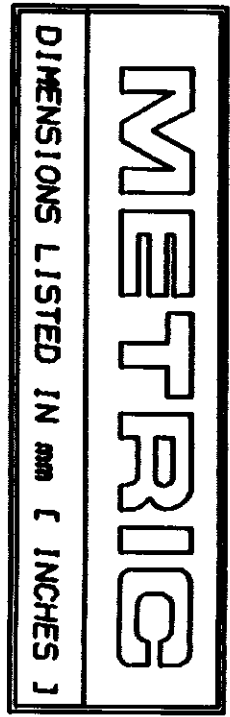

AMP WIRE RANGE 12-10 AWG STRAINED	UL E13288 Listed
● LR7189 Certified	MILITARY P/N AND CLASS
NOT CERTIFIED	NOT APPLICABLE

△ STAMP AMP 12-10* APPROX AS SHOWN

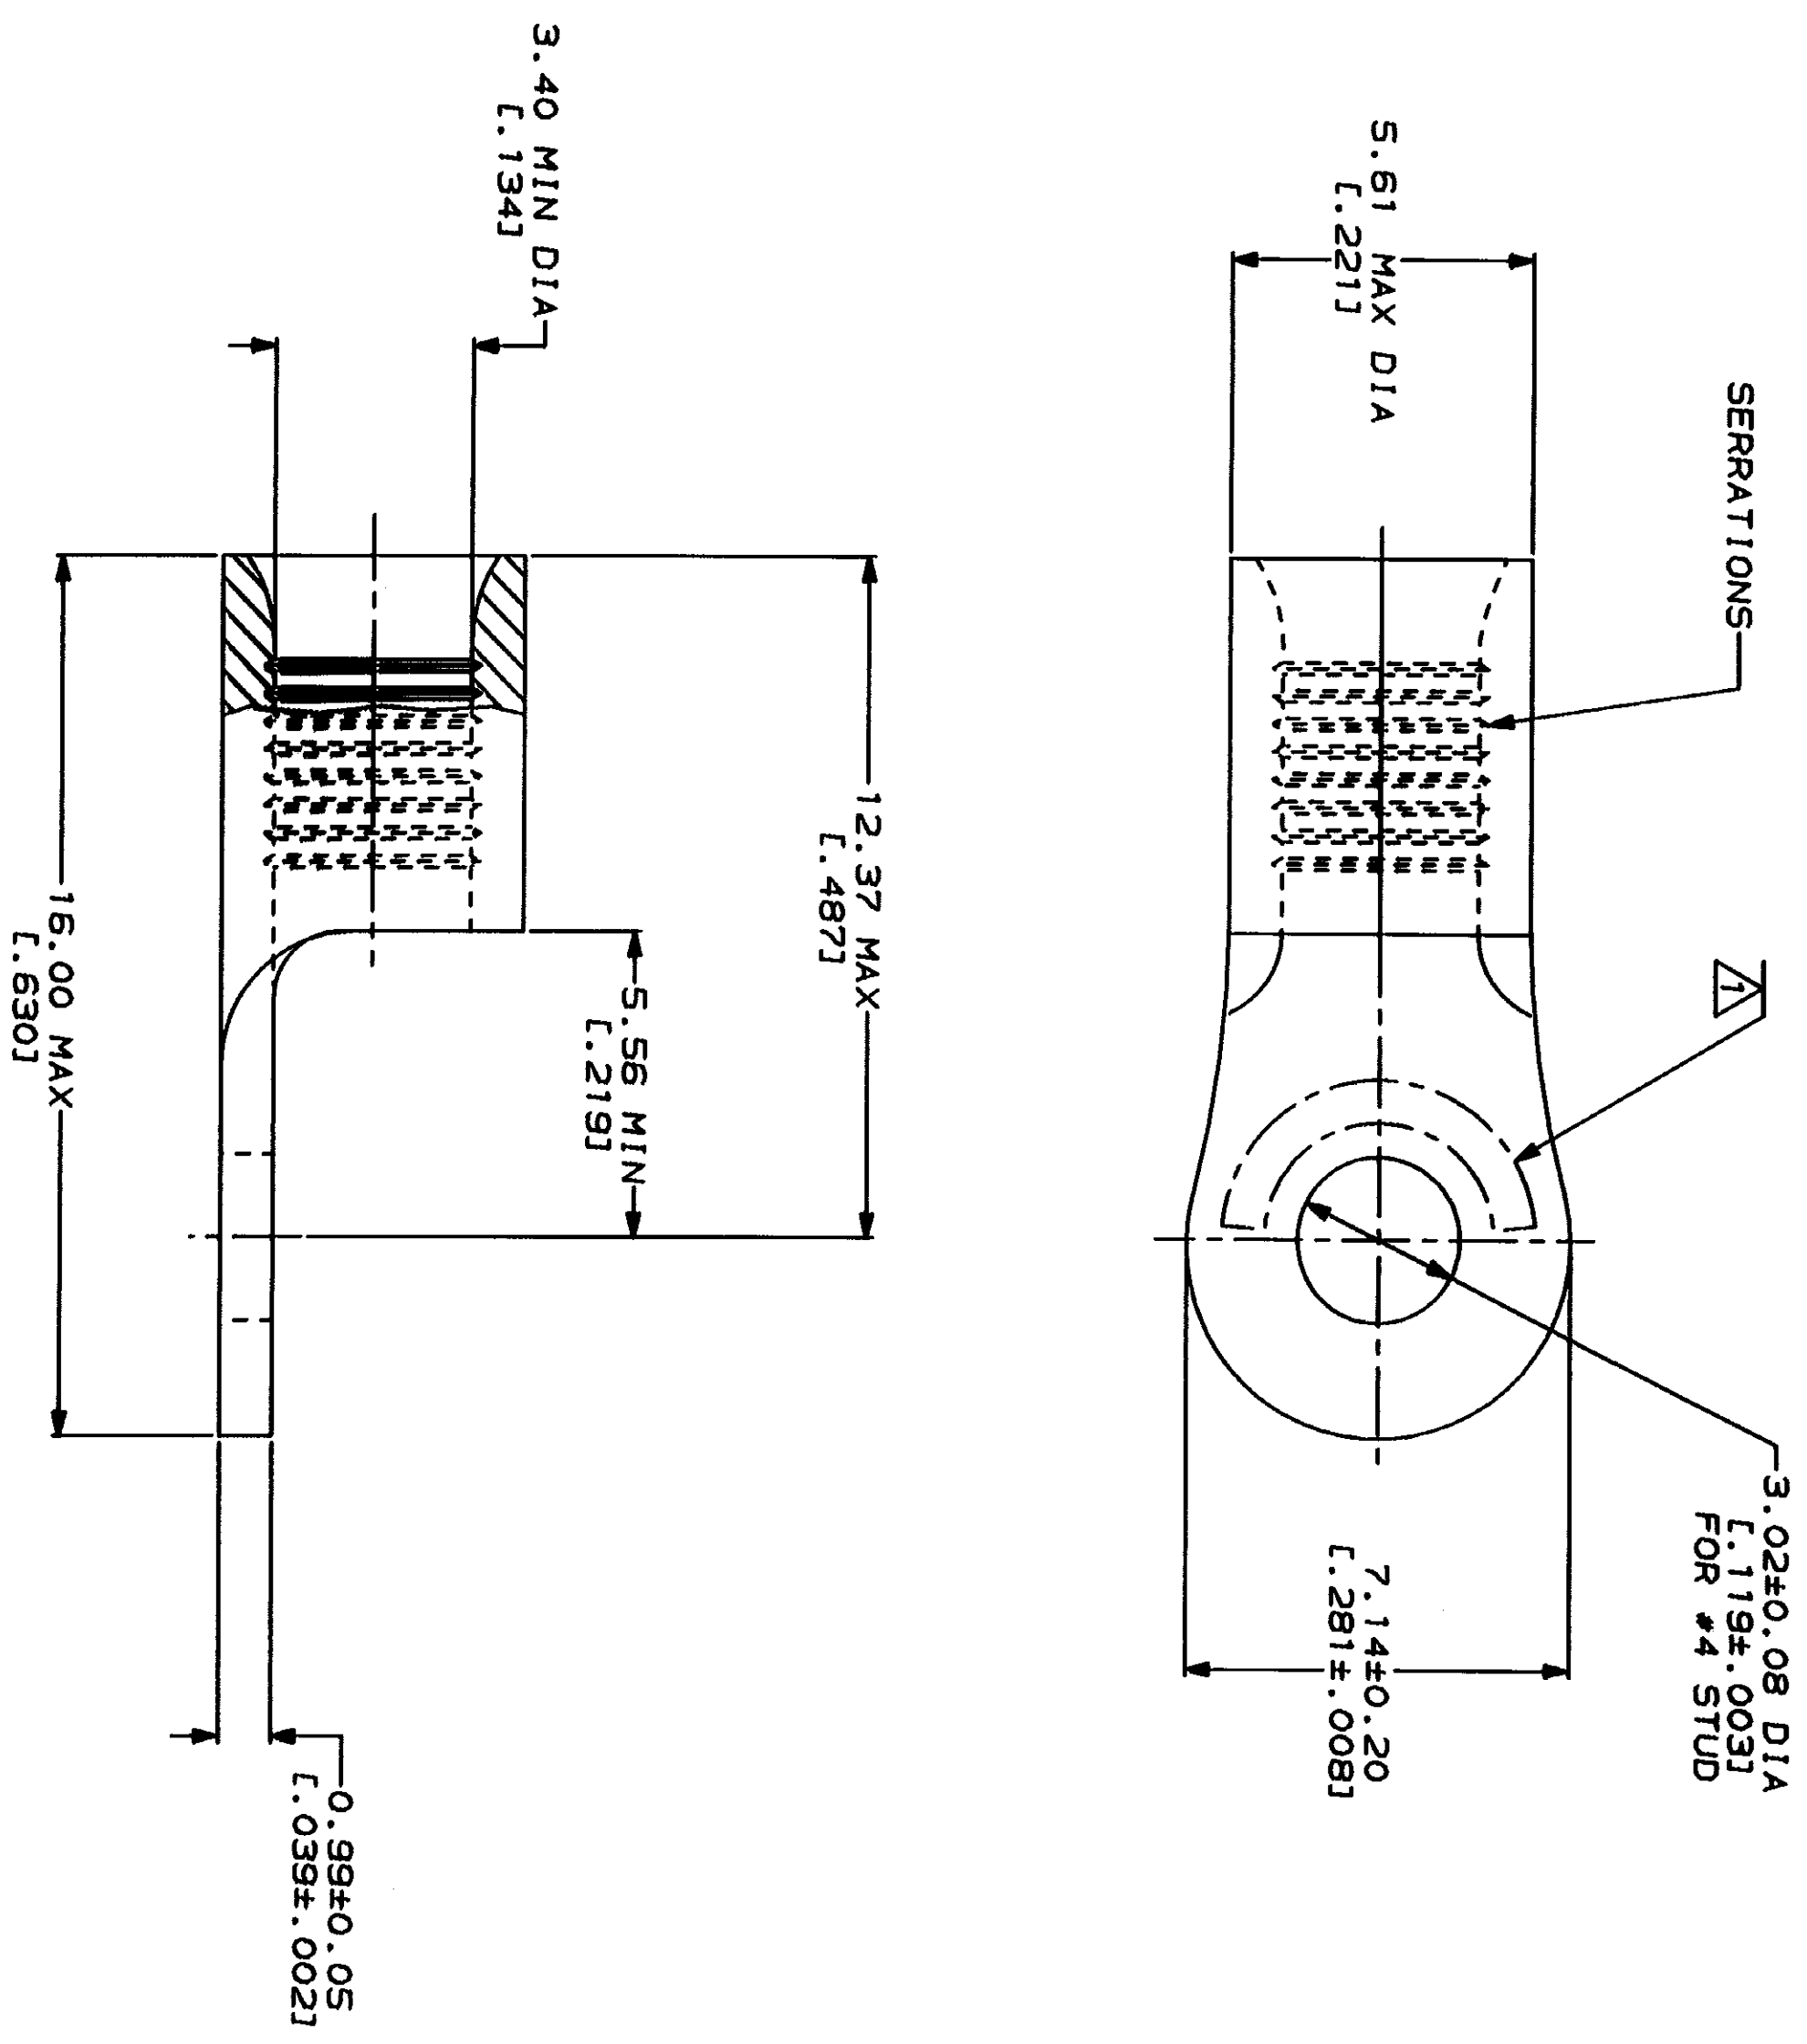

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX
VOLTAGE RATING: NOT APPLICABLE
WIRE CROSS SECTIONAL AREA RANGE: 2.62-6.64mm² (S, 180-13,100) CIR MILS STRANDED

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN MILLIMETERS - TOLERANCES ON: 1 PLG DEC ± .1 2 PLG DEC ± .1 3 PLG DEC ± .1 ANGLES

DR 2-5-93 TA BRINKMAN	CHK 2-5-93 DA PATTERSON
APPD 2-5-93 DE MILLER	APPD 2-5-93 JL NECKLEY

AMP AMP Incorporated
Harrisburg, PA 17185-3608

TERMINAL, RING TONGUE,
BUDGET

FINISH: TIN PLATE 0.0025±(L.000100) MIN THK PER MIL-T-10727	APPLICATION SPEC	SIZE: 00779	CAGE CODE: 00779	DRAWING NO: 34891
WEIGHT		SCALE: 8:1		

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)