



| LOC | DIST | REVISIONS | | | |
|-----|------|---------------------------|---------|-----|------|
| P | LTR | DESCRIPTION | DATE | DWN | APVD |
| J | | EC 0G3C 0771 04 | 29DEC04 | BSV | JLG |
| J1 | | REVISED PER ECO-09-020689 | 01SEP09 | KK | AEG |

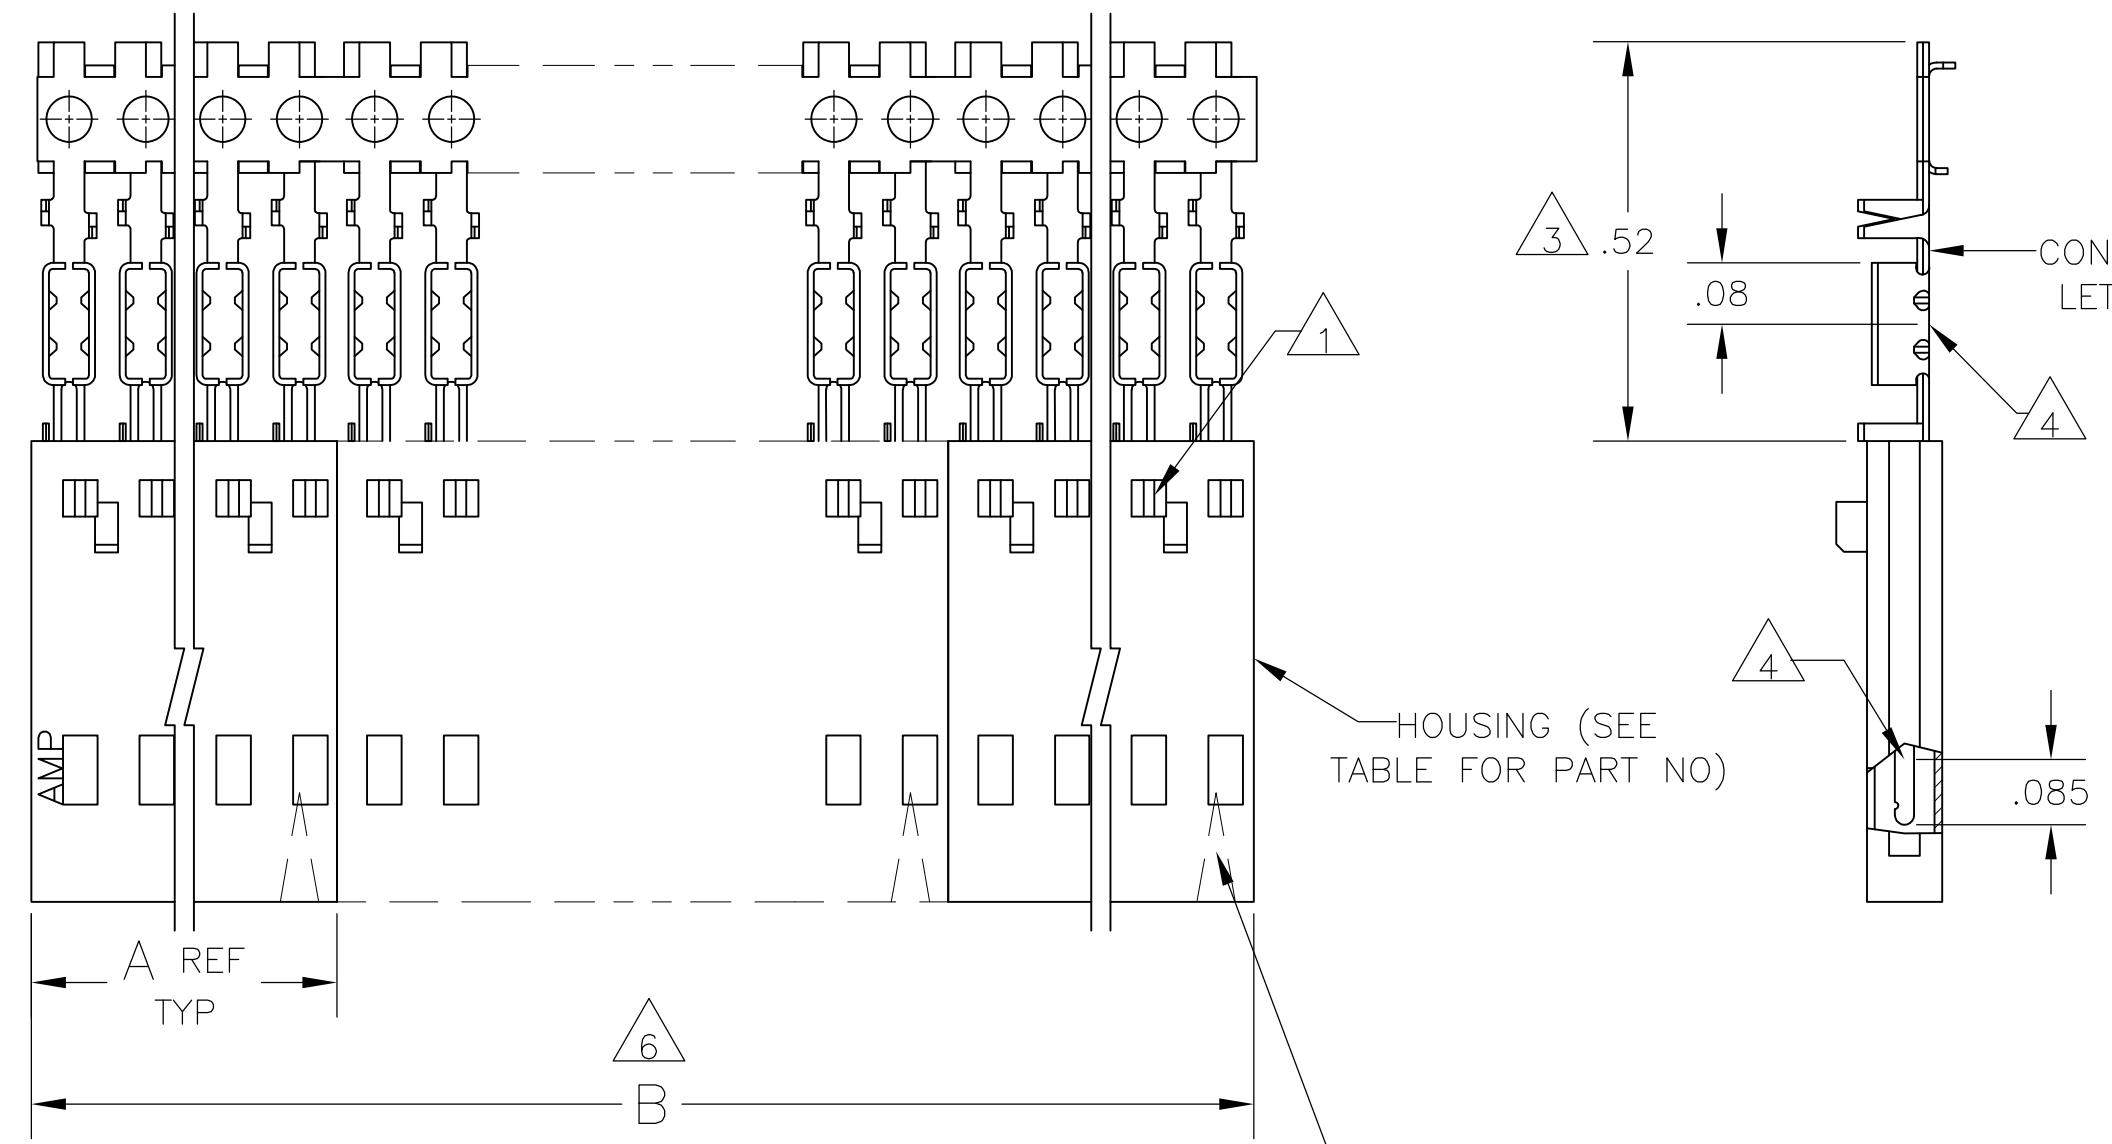

HOUSING (SEE TABLE FOR PART NO)

POSITION #1 INDICATOR (FARSIDE)

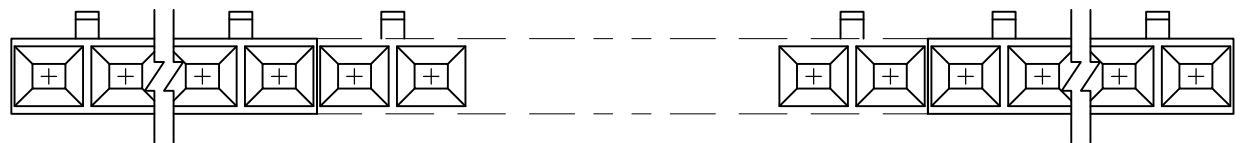

- 1 CONTACTS ARE LATCHED INTO THE PRELOAD WINDOWS
- 2 USE WITH #26-#30 AWG WIRE SIZE, .054/.030 INSULATION DIAMETER, .015 MAXIMUM INSULATION THICKNESS
- 3 THE DIMENSION APPLIES WITH THE FORWARD PRELOAD STOP IN CONTACT WITH THE HOUSING SURFACE
- 4 POINT OF MEASUREMENT FOR PLATING THICKNESS
- 5 FOR INDIVIDUAL ASSEMBLIES SEE PART NUMBER 103896
- 6 ASSEMBLIES ARE JOINED BY THE CARRIER STRIP. ORDER QUANTITY REFLECTS TOTAL NUMBER OF INDIVIDUAL ASSEMBLIES REQUIRED. SEE TABLE FOR NUMBER OF ASSEMBLIES PER STRIP.
- 7 PINS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 BRIGHT TIN-LEAD TERMINATION AREA, ALL OVER .000050 NICKEL.
- 8 PINS: .000030 GOLD IN THE CONTACT AREA, .000050-.000100 MATTE TIN TERMINATION AREA, ALL OVER .000050 NICKEL.
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

| | | | | | | | | |
|---------|------------|---|----|------|-------|---------------------|------------|-------------------------------|
| 9 | OBSOLETE | 8 | 2 | 2.40 | 1.198 | 1-104503-1 | 12 | 6-103955-1 |
| 9 | OBSOLETE | 8 | 2 | 2.20 | 1.098 | 1-104503-0 | 11 | 6-103955-0 |
| 9 | OBSOLETE | 8 | 2 | 2.00 | .998 | 104503-9 | 10 | 5-103955-9 |
| 9 | OBSOLETE | 8 | 2 | 1.80 | .898 | 104503-8 | 9 | 5-103955-8 |
| 9 | OBSOLETE | 8 | 2 | 1.60 | .798 | 104503-7 | 8 | 5-103955-7 |
| 9 | OBSOLETE | 8 | 2 | 1.40 | .698 | 104503-6 | 7 | 5-103955-6 |
| 9 | OBSOLETE | 8 | 4 | 2.39 | .598 | 104503-5 | 6 | 5-103955-5 |
| | | 8 | 4 | 1.99 | .498 | 104503-4 | 5 | 5-103955-4 |
| | | 8 | 5 | 1.99 | .398 | 104503-3 | 4 | 5-103955-3 |
| | | 8 | 5 | 1.49 | .298 | 104503-2 | 3 | 5-103955-2 |
| | | 8 | 10 | 1.98 | .198 | 104503-1 | 2 | 5-103955-1 |
| 9 | OBSOLETE | 7 | 2 | 2.40 | 1.198 | 1-104503-1 | 12 | 1-103955-1 |
| 9 | OBSOLETE | 7 | 2 | 2.20 | 1.098 | 1-104503-0 | 11 | 1-103955-0 |
| 9 | OBSOLETE | 7 | 2 | 2.00 | .998 | 104503-9 | 10 | 103955-9 |
| 9 | OBSOLETE | 7 | 2 | 1.80 | .898 | 104503-8 | 9 | 103955-8 |
| 9 | OBSOLETE | 7 | 2 | 1.60 | .798 | 104503-7 | 8 | 103955-7 |
| 9 | OBSOLETE | 7 | 2 | 1.40 | .698 | 104503-6 | 7 | 103955-6 |
| 9 | OBSOLETE | 7 | 4 | 2.39 | .598 | 104503-5 | 6 | 103955-5 |
| 9 | SUPERSEDED | 7 | 4 | 1.99 | .498 | 104503-4 | 5 | 103955-4 |
| 9 | SUPERSEDED | 7 | 5 | 1.99 | .398 | 104503-3 | 4 | 103955-3 |
| 9 | SUPERSEDED | 7 | 5 | 1.49 | .298 | 104503-2 | 3 | 103955-2 |
| | | 7 | 10 | 1.98 | .198 | 104503-1 | 2 | 103955-1 |
| PLATING | | 6 | B | A | | HOUSING PART NUMBER | NO OF POSN | ASSEMBLY PART NUMBER ON STRIP |

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN L. MAYER 11-5-86
 CHK P.C.deYONG 11-12-86
 APVD P.C.deYONG 11-12-86

Tyco Electronics Corporation
 Harrisburg, Pa 17105-3608

NAME: PIN ASSEMBLY, AMPMODU MTE, SINGLE ROW, .100 C/L, WITH GUIDE RIBS, FOR #26-#30 AWG WIRE SIZE, STRIP FORM

PRODUCT SPEC: 108-25034
 APPLICATION SPEC: 114-25026

SIZE: A2 CAGE CODE: 00779 DRAWING NO: 103955 RESTRICTED TO: -

MATERIAL: HOUSING: FLAME RETARDANT THERMOPLASTIC. COLOR: BLACK. PINS: PHOS. BRONZE. FINISH: SEE TABLE

WEIGHT: -

CUSTOMER DRAWING

SCALE: 4:1 SHEET: 1 OF 1 REV: J1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)