

# SPECIFICATION CONTROL DRAWING

**55AC1122**

Title

TWO CONDUCTOR CABLE, SHIELDED, JACKETED, 600 VOLT


Date

7-18-03

Revision

A

This specification sheet forms a part of the latest issue of Raychem Specification 55A.

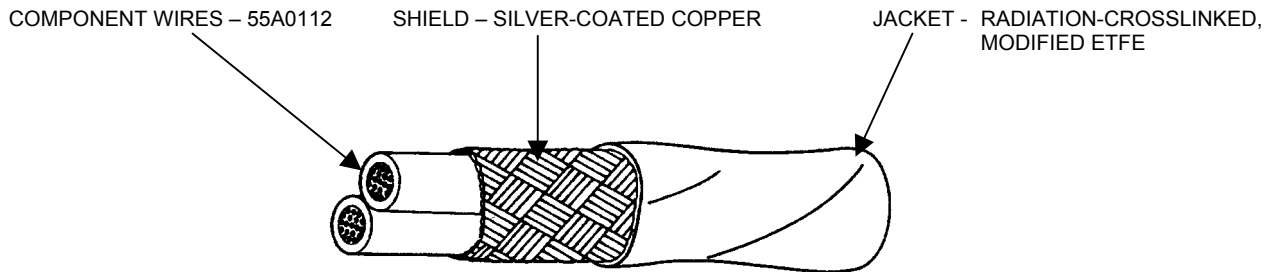

### CABLE CONSTRUCTION DETAILS

PART NUMBER 1/	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		OUTSIDE DIAMETER (in.)		MAXIMUM WEIGHT (lb/1000 ft)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
55AC1122-28-*	28	38	.006	.008	.087	.092	6.6
55AC1122-26-*	26	38	.006	.008	.097	.102	8.3
55AC1122-24-*	24	38	.006	.008	.107	.112	10.2
55AC1122-22-*	22	38	.006	.008	.119	.125	12.7
55AC1122-20-*	20	38	.006	.008	.133	.140	16.7
55AC1122-18-*	18	38	.006	.008	.153	.161	22.6
55AC1122-16-*	16	38	.006	.008	.169	.177	27.3
55AC1122-14-*	14	38	.006	.008	.203	.213	39.3
55AC1122-12-*	12	38	.007	.009	.241	.253	56.1

### CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C

Maximum continuous conductor temperature

VOLTAGE RATING: 600 volts (rms) at sea level

ACCELERATED AGING: 300 ± 3°C for 7 hours

BLOCKING: 200 ± 3°C for 6 hours

DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz

FLAMMABILITY: Procedure 1,

3 seconds (maximum); 3 inches (maximum);

no flaming of facial tissue

JACKET COLOR: White preferred

JACKET ELONGATION AND TENSILE STRENGTH:

Elongation, 50% (minimum)

Tensile Strength, 5000 lbf/in<sup>2</sup> (minimum)

JACKET FLAWS:

Spark Test, 1000 volts (rms)

Impulse Dielectric Test, 6.0 kV (peak)

LIFE CYCLE: 230 ± 3°C for 500 hours

LOW TEMPERATURE-COLD BEND: -65 ± 2°C for 4 hours

SHIELD COVERAGE: 90% (minimum)

VOLTAGE WITHSTAND TEST (Post Environmental):

1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:

The "\*" in the part numbers above shall be replaced by color

code designators with a slash separating the component

wire colors and a dash separating the component wire colors

from the jacket color.

1/ Example: AWG 22, blue and white component wires;

white jacket: 55AC1122-22-6/9-9

NOTE: Nominal values are for information only.

Nominal values are not requirements.

*Users should evaluate the suitability of this product for their application. Specifications are subject to change without notice.*

*Tyco Electronics also reserves the right to make changes in materials or processing, which do not affect compliance with any specification, without notification to Buyer.*

1/ COLORS AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681. HOWEVER, DUE TO LENGTH LIMITATIONS OF THE RAYCHEM PART NUMBER, AN ALTERNATIVE COLOR CODE MAY REPLACE MIL-STD-681 COLOR CODE DESIGNATORS. (EXAMPLE: "901/902..." MAY BE REPLACED BY "Axxx".) OTHER CODES AND SUFFIXES MAY BE ADDED TO THE PART NUMBER, AS NECESSARY, TO CAPTURE ANY ADDITIONAL REQUIREMENTS IMPOSED BY THE PURCHASE ORDER.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)