

4

3


2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AF	50				
	K	REVISED PER ECR-12-005303	18JUL12	KH	KR

- 1 MATES WITH .032±.001x.250 TAB
- 2 WIRE STRIP LENGTH .281
- 3 INSULATION SIZE .160 MAX DIA
- 4 CONTINUOUS STRIP ON REELS
- △5 DIMENSION DOES NOT INCLUDE TRIM BURR+
- △6 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

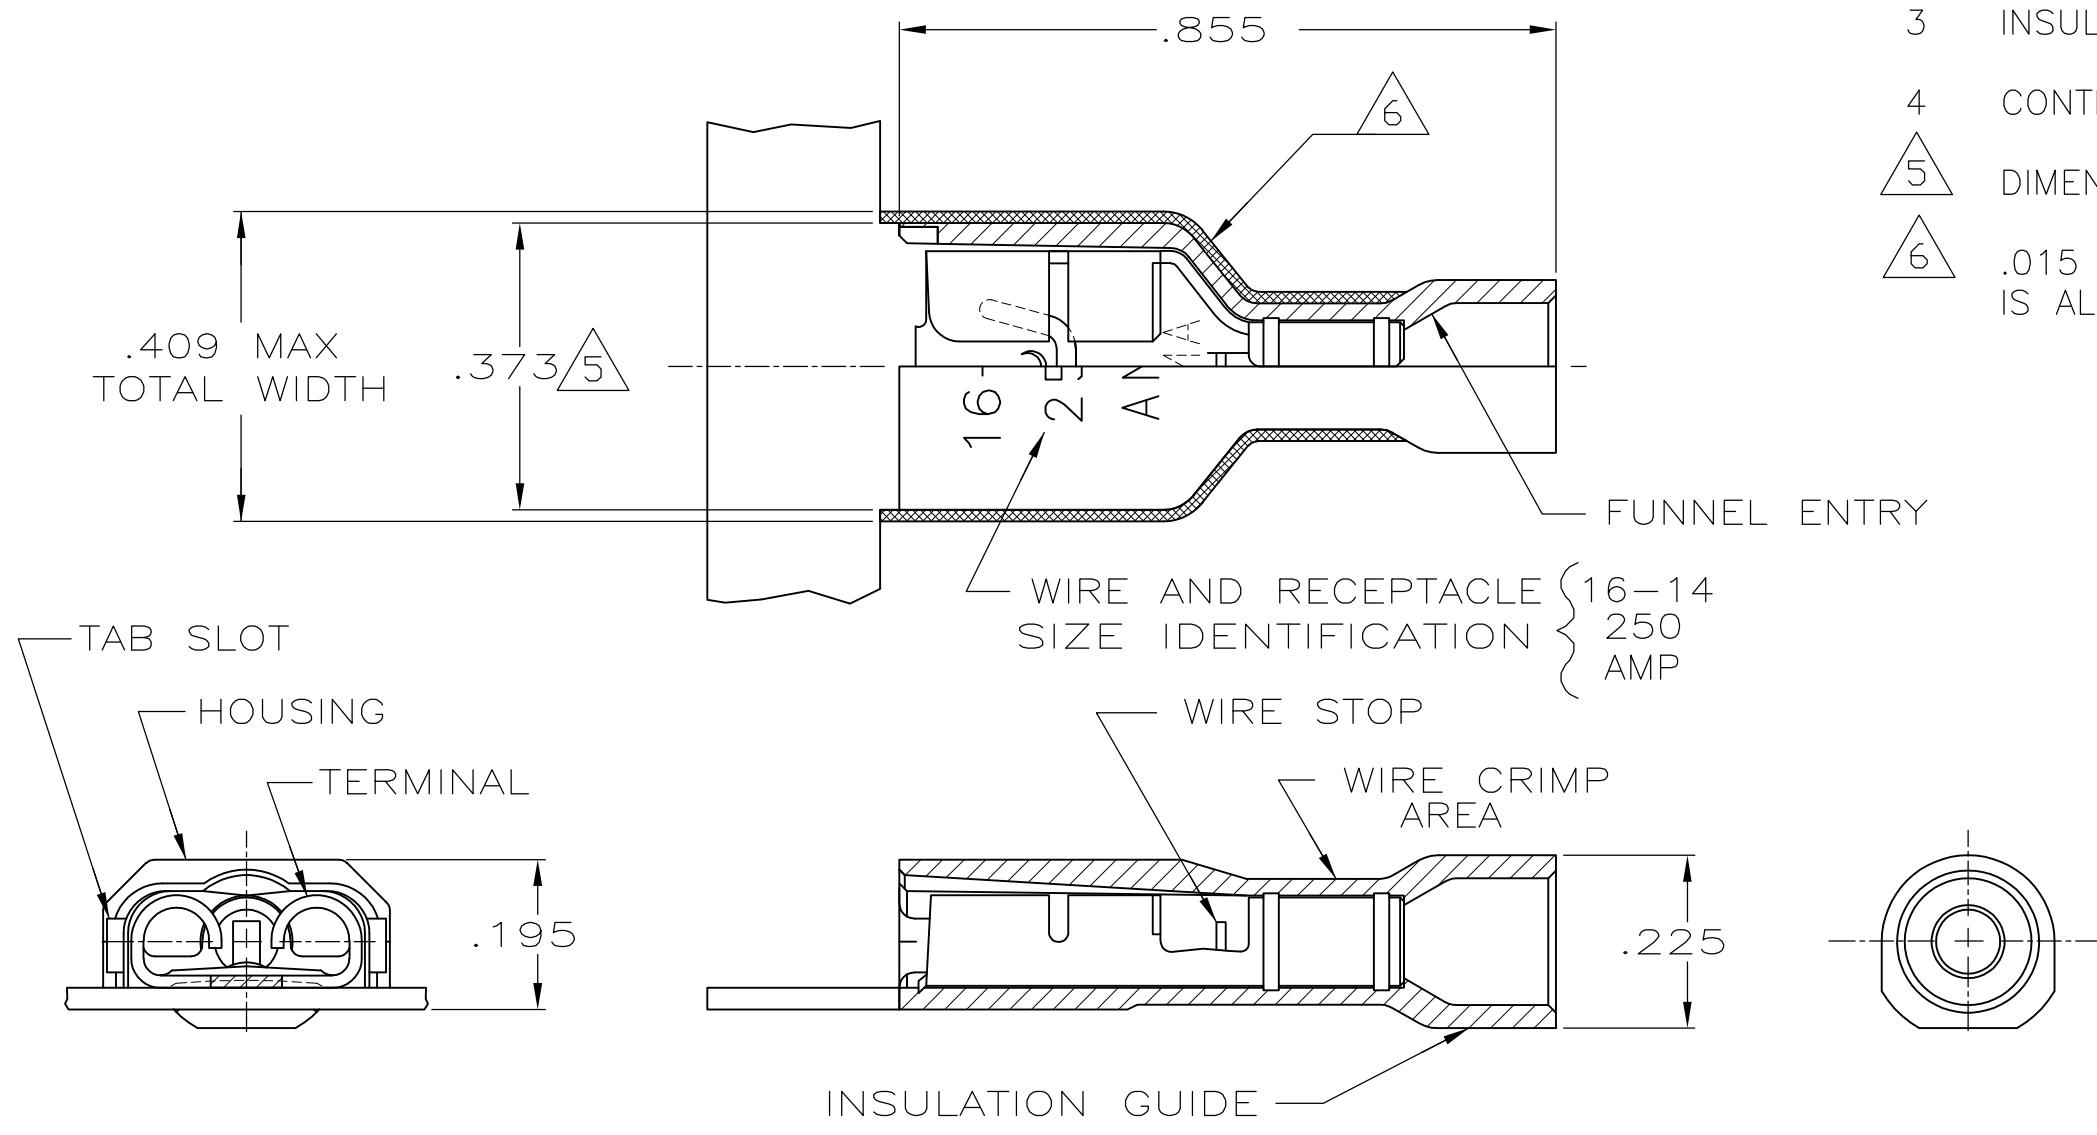

HOUSING: NYLON, COLOR-BLUE TRANSLUCENT RECEPTACLE: #3 HARD PHOS BRONZE TIN	3-520116-2
MATERIAL & FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P FORTNEY 10/18/88	TE Connectivity	
DIMENSIONS: INCHES		CHK JR RUTH 10/18/88		
		APVD K RANDOLPH 10/21/88		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	RECEPTACLE ASSY, ULTRA-FAST, .250 SERIES, 16-14 AWG	
0 PLC ± -	1 PLC ± -	PRODUCT SPEC	108-2043	
2 PLC ± -	3 PLC ± .015	APPLICATION SPEC	114-2123	
4 PLC ± -	ANGLES ± -	WEIGHT	SIZE	CAGE CODE
MATERIAL SEE TABLE	FINISH SEE TABLE	-	A3	00779
CUSTOMER DRAWING			DRAWING NO	RESTRICTED TO
			C-520116	-
			SCALE 4:1	SHEET 1 OF 1
			REV	K

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)