
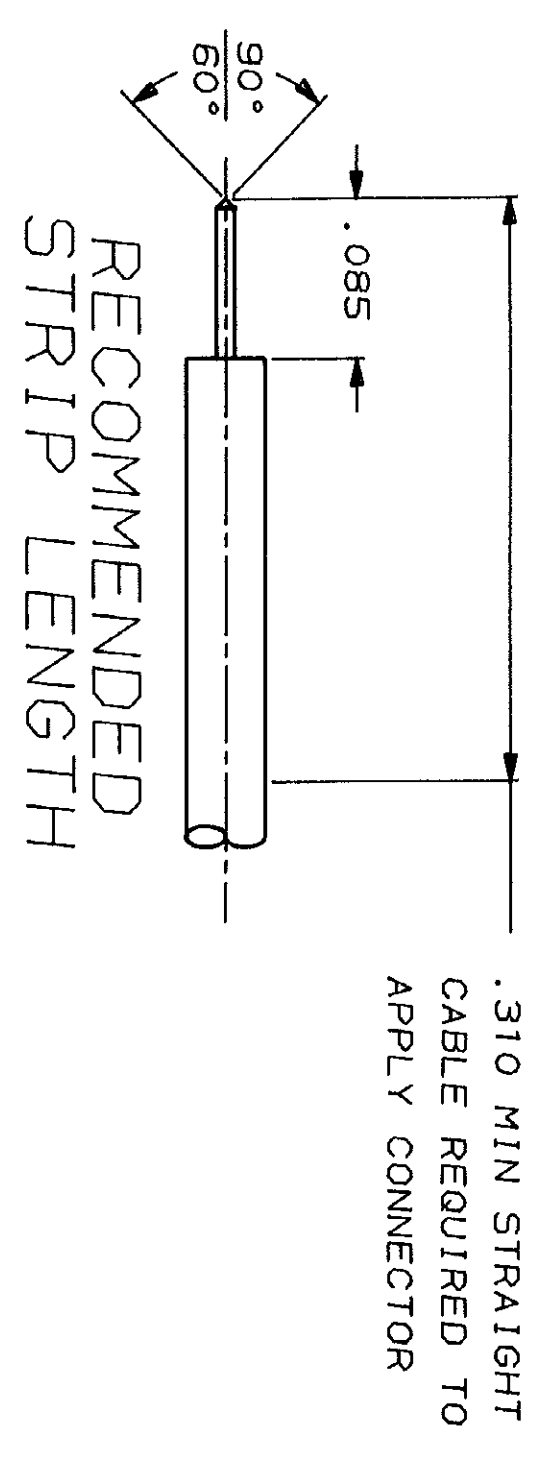


- 1 BERYLLIUM COPPER PER QQ-C-530
- 2 PTFE PER MIL-P-19468
- 3 GOLD PL PER MIL-G-45204
- 4 NICKEL PL PER QQ-N-290
- 5. FOR USE WITH .047 SEMI-RIGID CABLE.

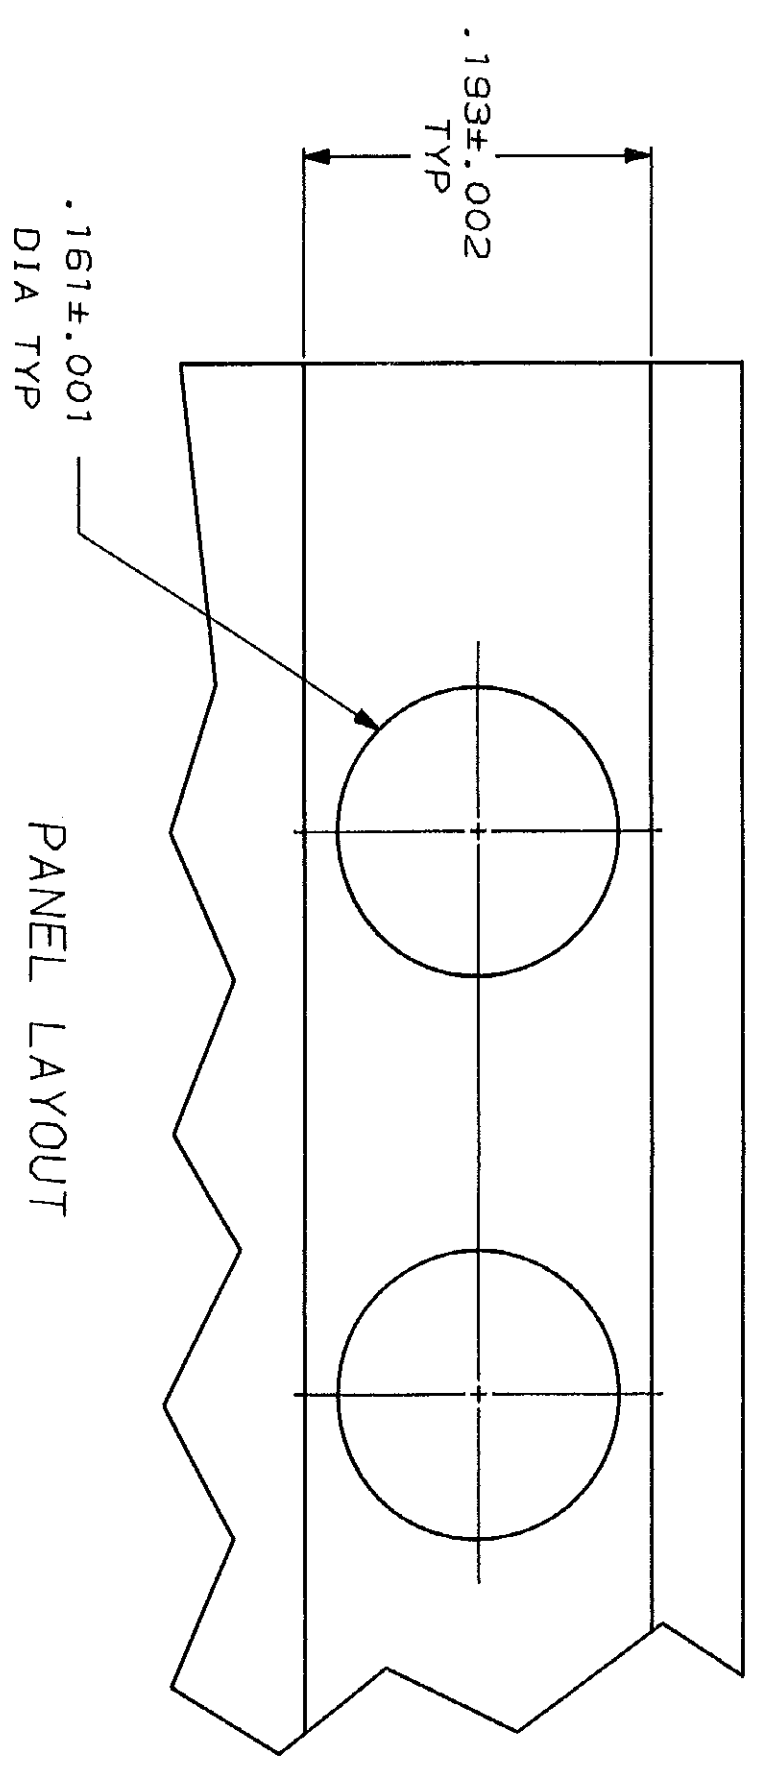

LOC	DIST	P	F	ZONE	LTR	REVISIONS	DESCRIPTION	DATE	APPD
AJ	16					0	REL PER 88-3484-016		

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON:		DR	DATE	NAME	AMP INCORPORATED
1	±.008	CHK	8-22-88	JACK, BULKHEAD,	AMP INCORPORATED
2	±.008	APPD	8/24/88	BLIND MATE 2.8MM	Harrisburg, Pa. 17105
3	±.008	APPD	9-6-88		
4	±.008	PRODUCT SPEC			
MATERIAL		APPD			
FINISH		APPLICATION SPEC			
WEIGHT		SCALE	10:1		

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)