



**ES-CAPS-HW**  
**Polyolefin, Dual Wall**  
**Semirigid, Heat-Shrinkable**

As Supplied

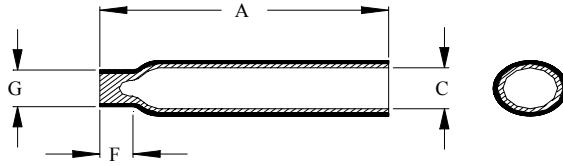

After Unrestricted Recovery

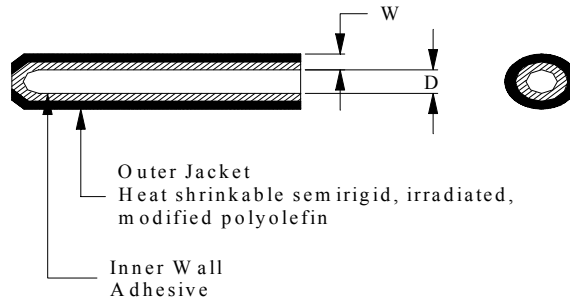

Color: Black and Clear  
 Temperature rating: -40°C to 105°C  
 Material: Per RW-3006

Recovered Adhesive Wall 0.040 min. average

**Table 1**

Dimensions (mm /In)

| Part No.            | A          | C Min.    | D Max.    | F Min.   | G         | W min.    |
|---------------------|------------|-----------|-----------|----------|-----------|-----------|
|                     | ±3.81/.150 |           |           |          | ±1.5/.062 |           |
| ES-CAP-HW No.3-45mm | 45/1.77    | 10.8/.427 | 2.41/.095 | 5.0/.197 | 7.4/.290  | 2.16/.085 |

**Specification Control Drawing**

|                            |   |            |                         |   |                  |  |
|----------------------------|---|------------|-------------------------|---|------------------|--|
| <b>tyco</b><br>Electronics | Tyco Electronics Corporation<br>300 Constitutional Drive<br>Menlo Park, CA 94025 USA  |            | <b>Raychem</b>          | Title: ES-CAPS-HW<br>Polyolefin, Dual Wall, Semirigid,<br>Heat-Shrinkable |                  |  |
|                            | Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application |            |                         | Document No :<br><b>ES-CAPS-HW</b>  |                  |  |
| Cage Code:<br>06090        | Scale:<br>None  | Size:<br>A | Rev. Date:<br>29-Apr-03 | Rev. :<br>C   | Sheet:<br>1 of 1 |  |

If this document is printed it becomes uncontrolled. Check for the latest revision.

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)