



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AJ	16	D	REVISED PER ECO-05-013873	16NOV05	BM JL

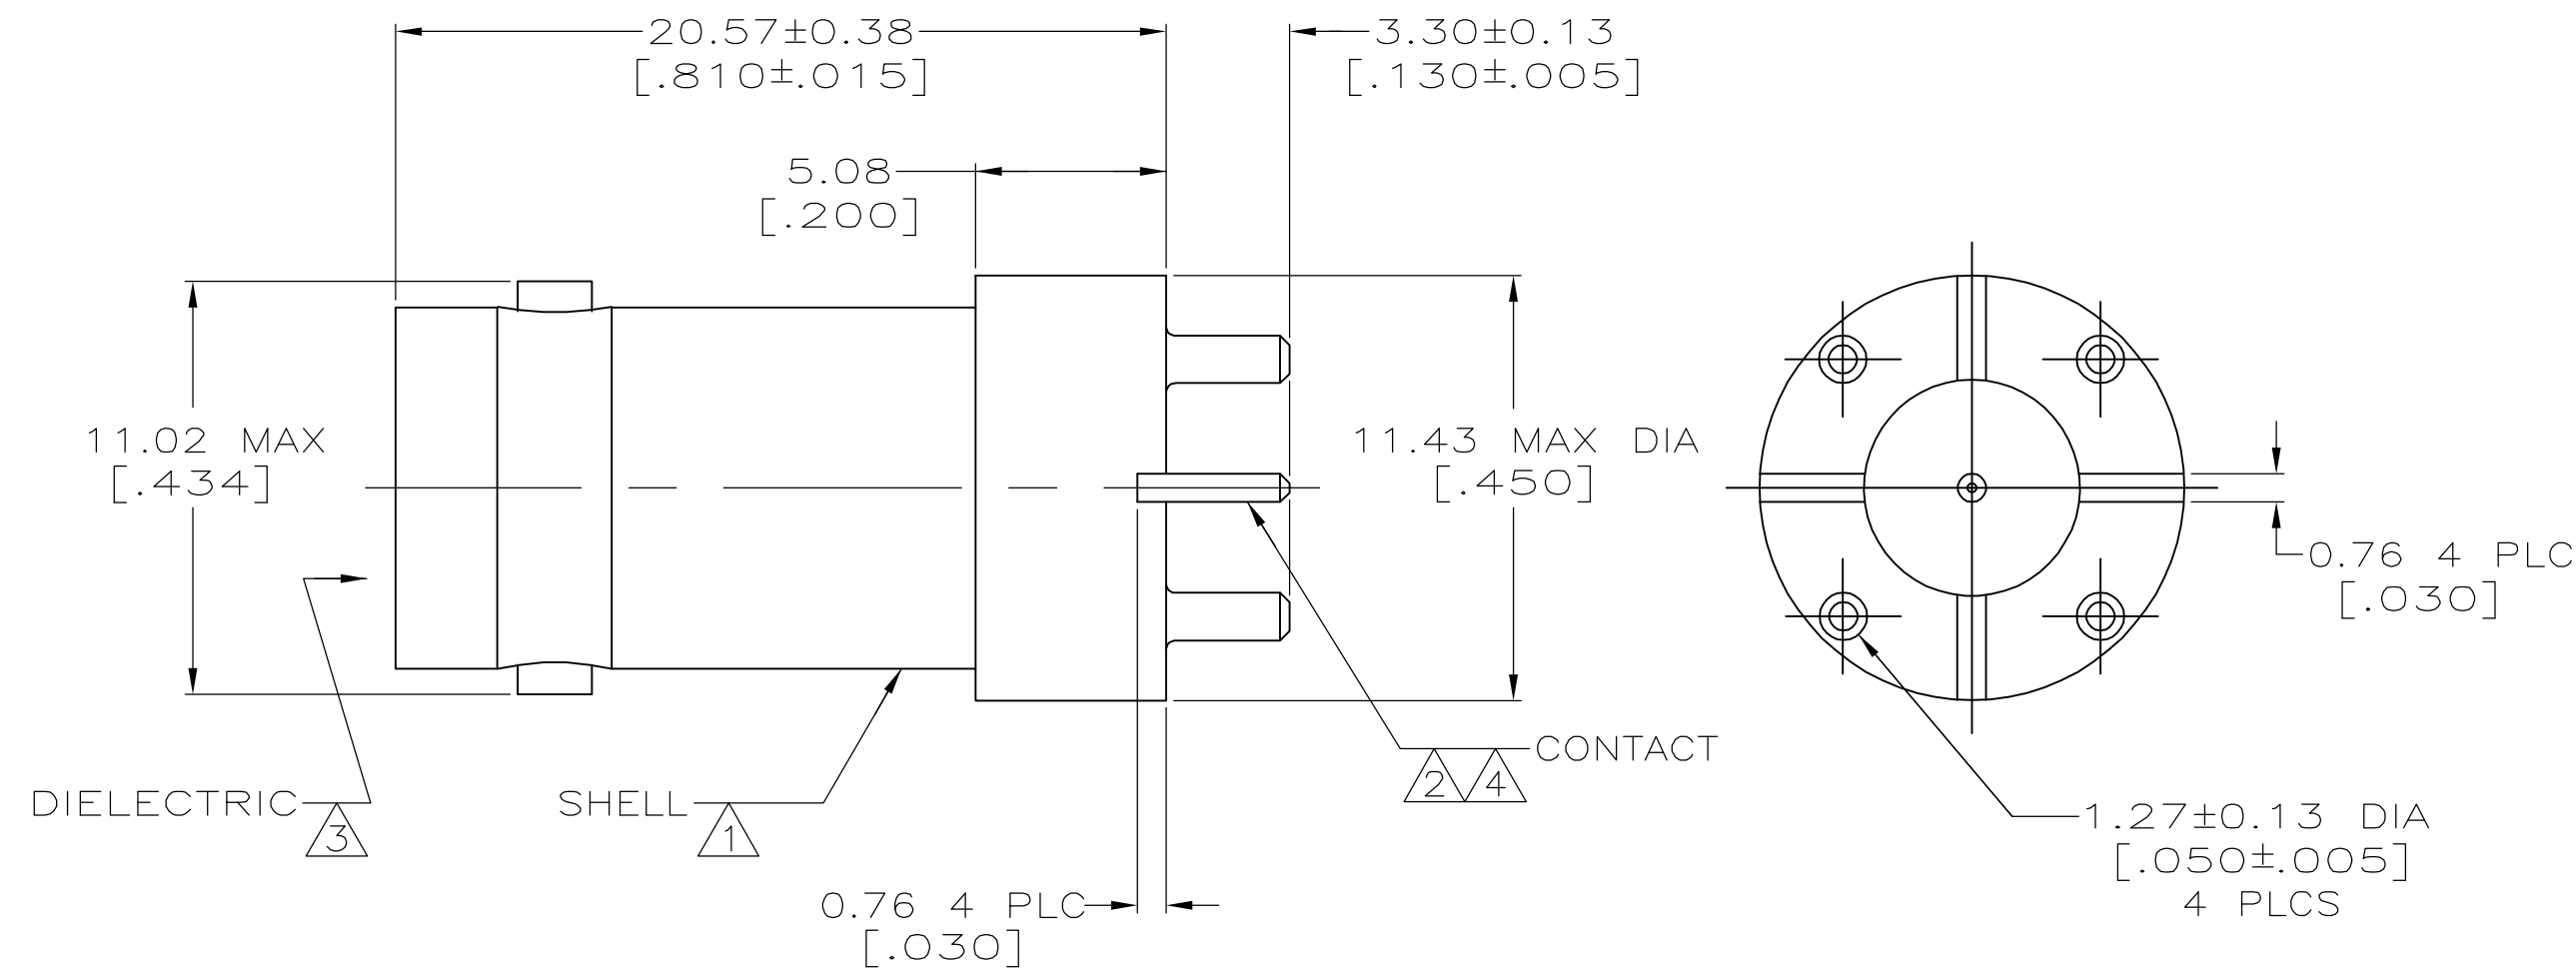

- 1 ZINC PER QQ-Z-363
- 2 BERYLLIUM COPPER PER ASTM-B-196
- 3 PTFE PER MIL-P-19468
- 4 GOLD PLATE PER MIL-G-45204
0.76 μm [.000030] MINIMUM THICK.
- 5 TIN-LEAD PLATE PER ASTM-B-545,
3.04 μm [.000120] MINIMUM THICK.
- 6 NICKEL PLATE PER QQ-N-290
5.08 μm [.000200] MINIMUM THICK.
- 7. SEE INSTRUCTION SHEET 408-9889.

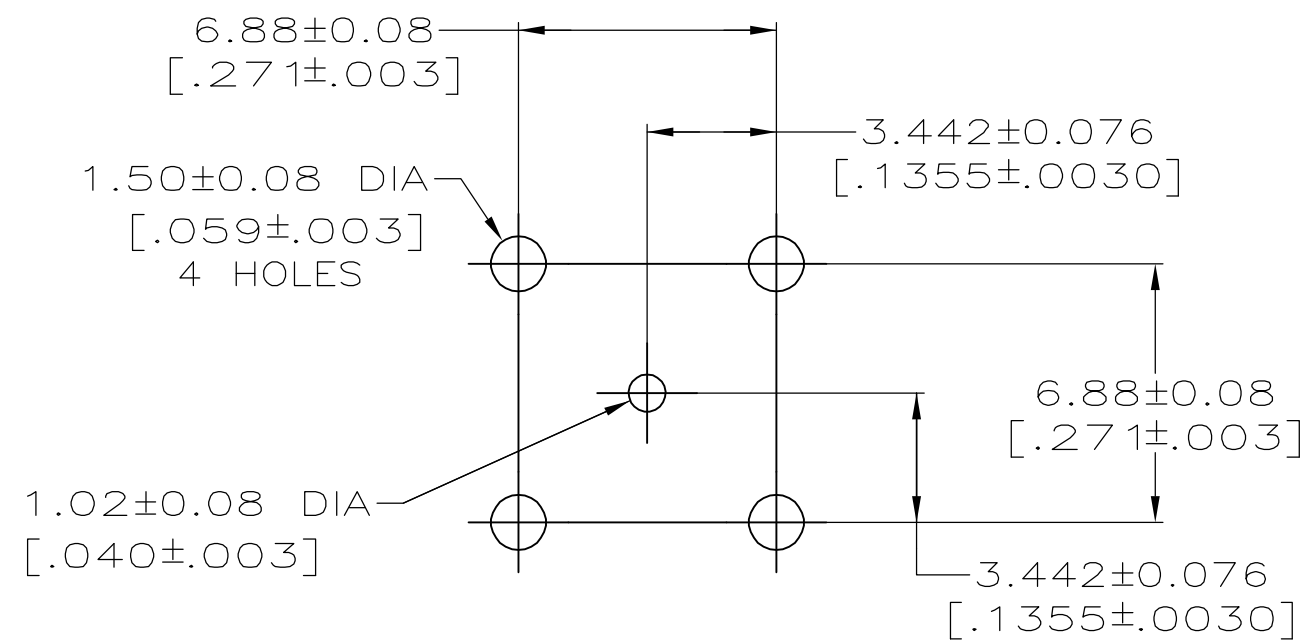

PCB CONFIGURATION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. LIPPERT 1-19-99	tyco Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: INCHES		CHK J. LIPPERT 3-11-99	NAME JACK, VERTICAL, PCB, 75 OHM, COMMERCIAL BNC	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. LIPPERT 3-11-99	PRODUCT SPEC 108-12078	
0 PLC ± -		APPLICATION SPEC		
1 PLC ± -		SIZE A2		
2 PLC ± 0.20 [.008]		CAGE CODE 00779		
3 PLC ± -		DRAWING NO C=1274291		
4 PLC ± -		RESTRICTED TO		
ANGLES ± -		SCALE 5:1		
FINISH		SHEET 1 of 1		
MATERIAL SEE NOTES 1 - 3		WEIGHT -		
SEE NOTES 4, 5		REV D		
RESTRICTED CUSTOMER		REVISIONS		

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)