
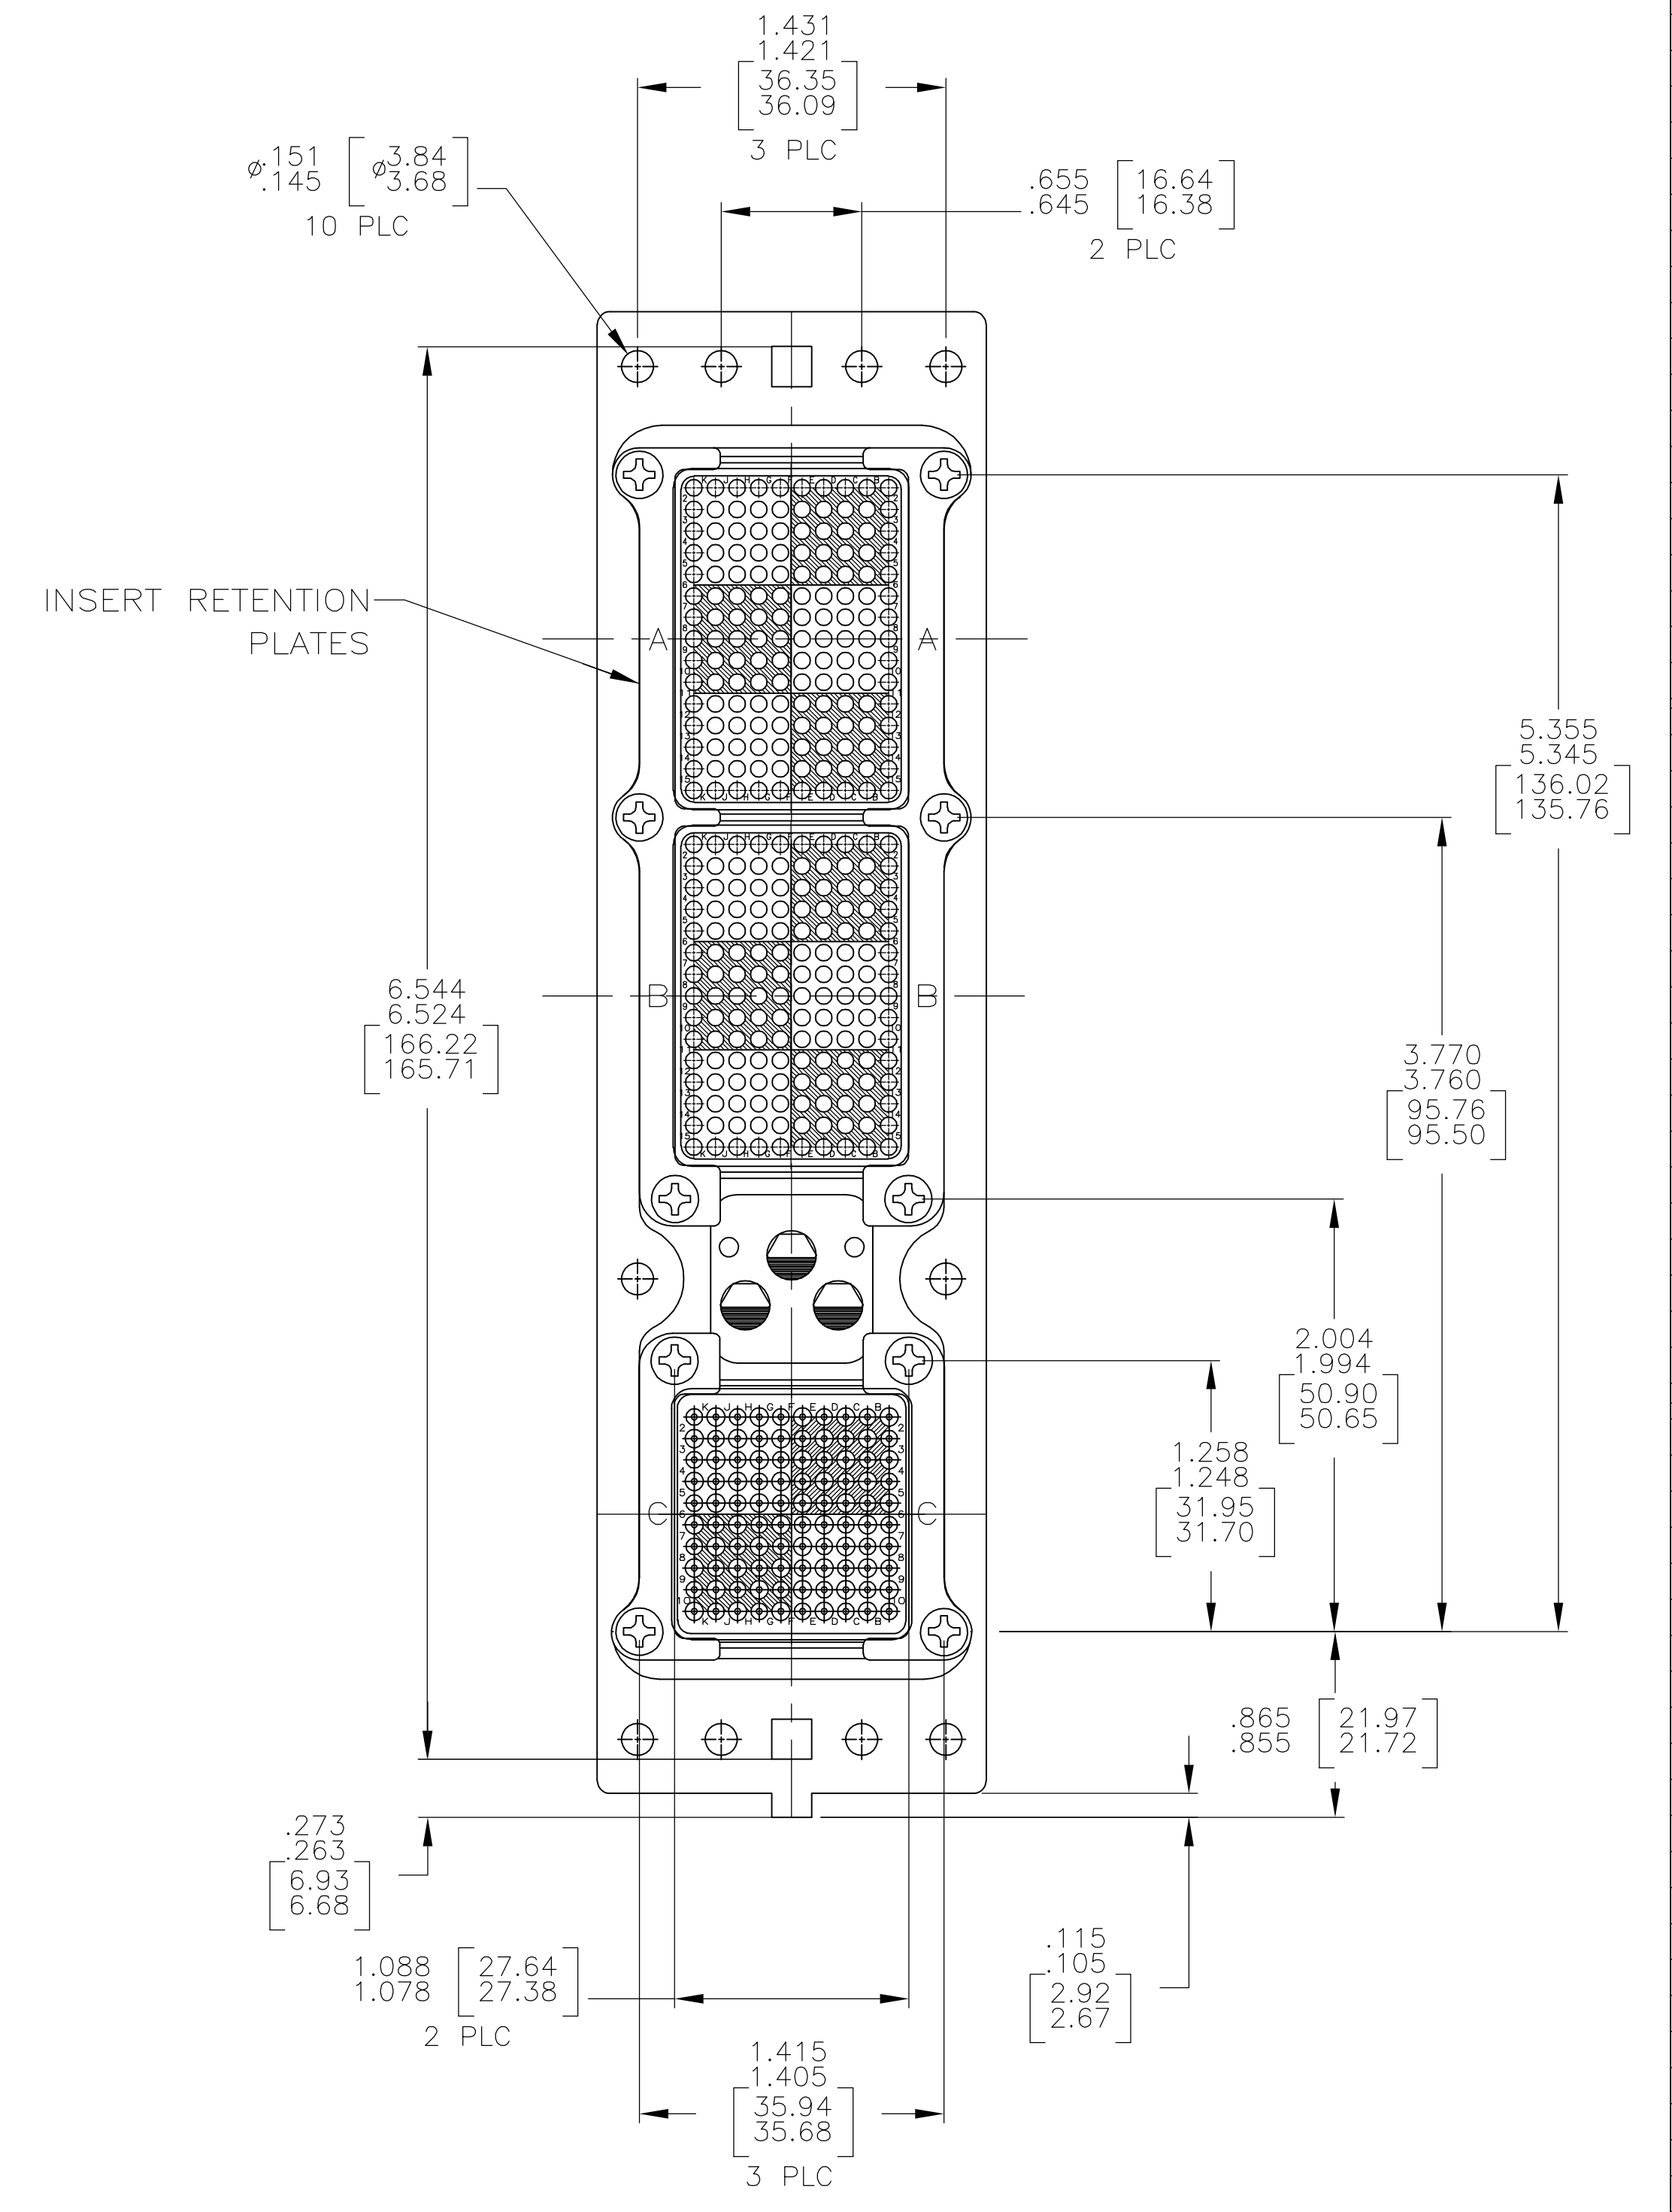
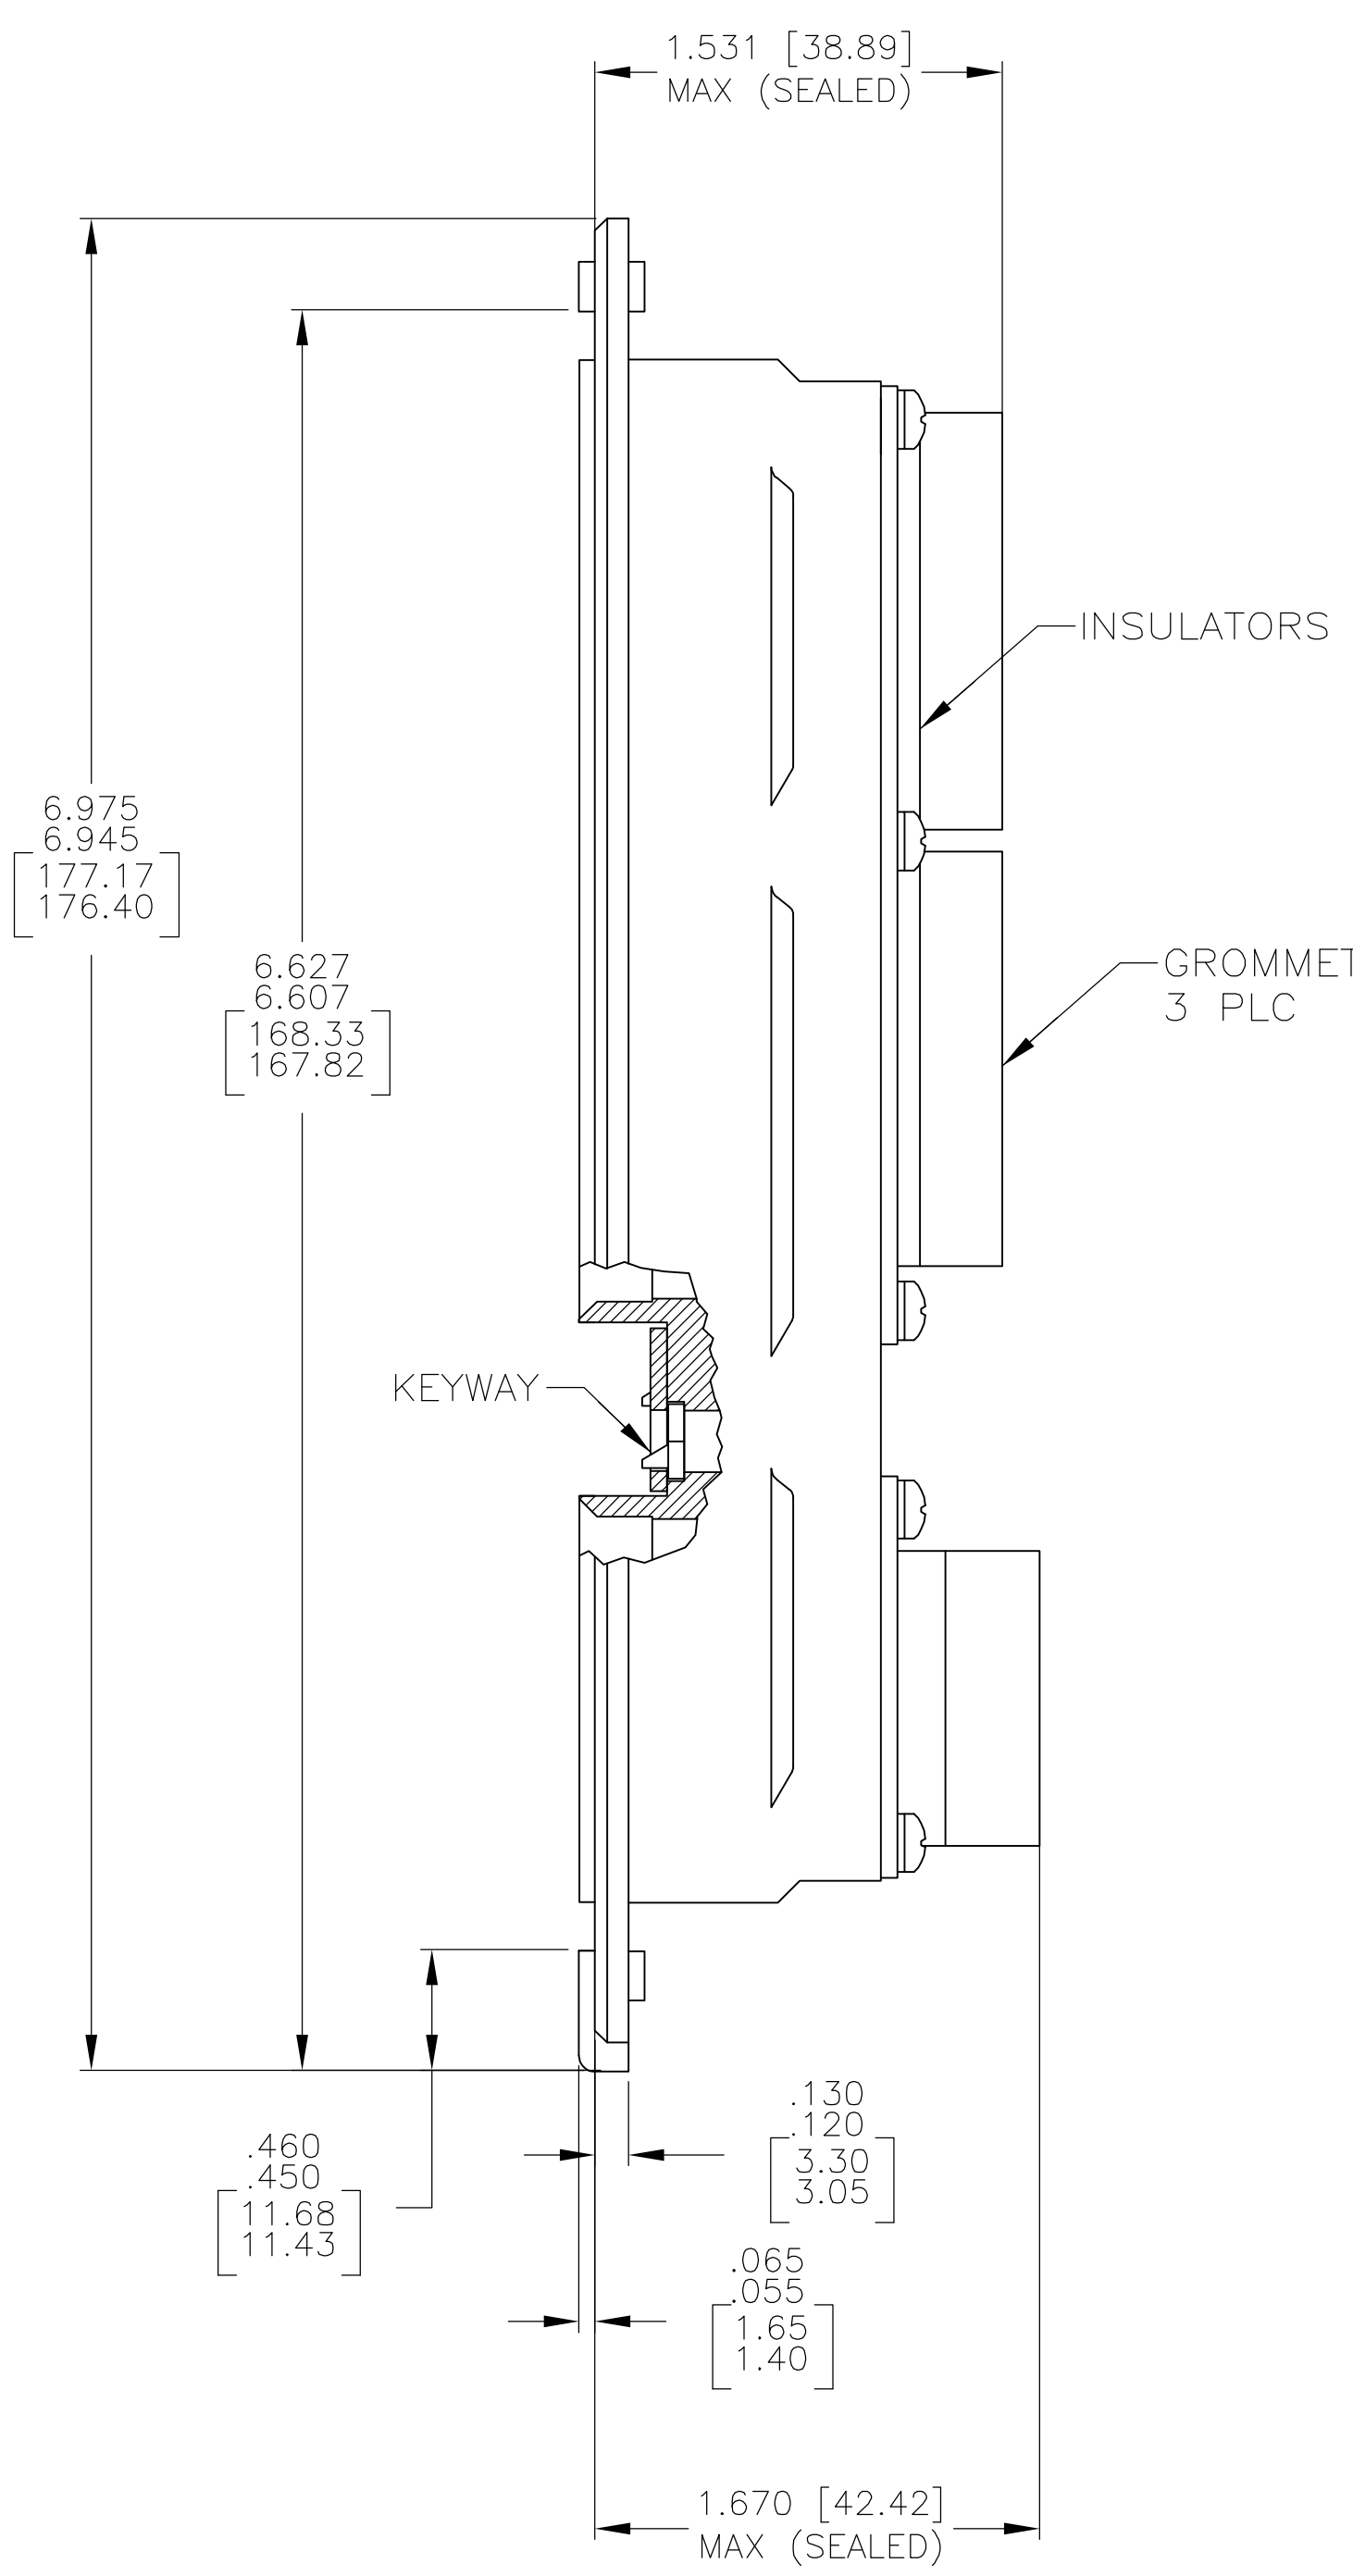


LOC		DIST		REVISIONS			
DF	AO	REV	DATE	BY	CHK	APPV	
		0	RELEASED	10-3-05	CT	KH	

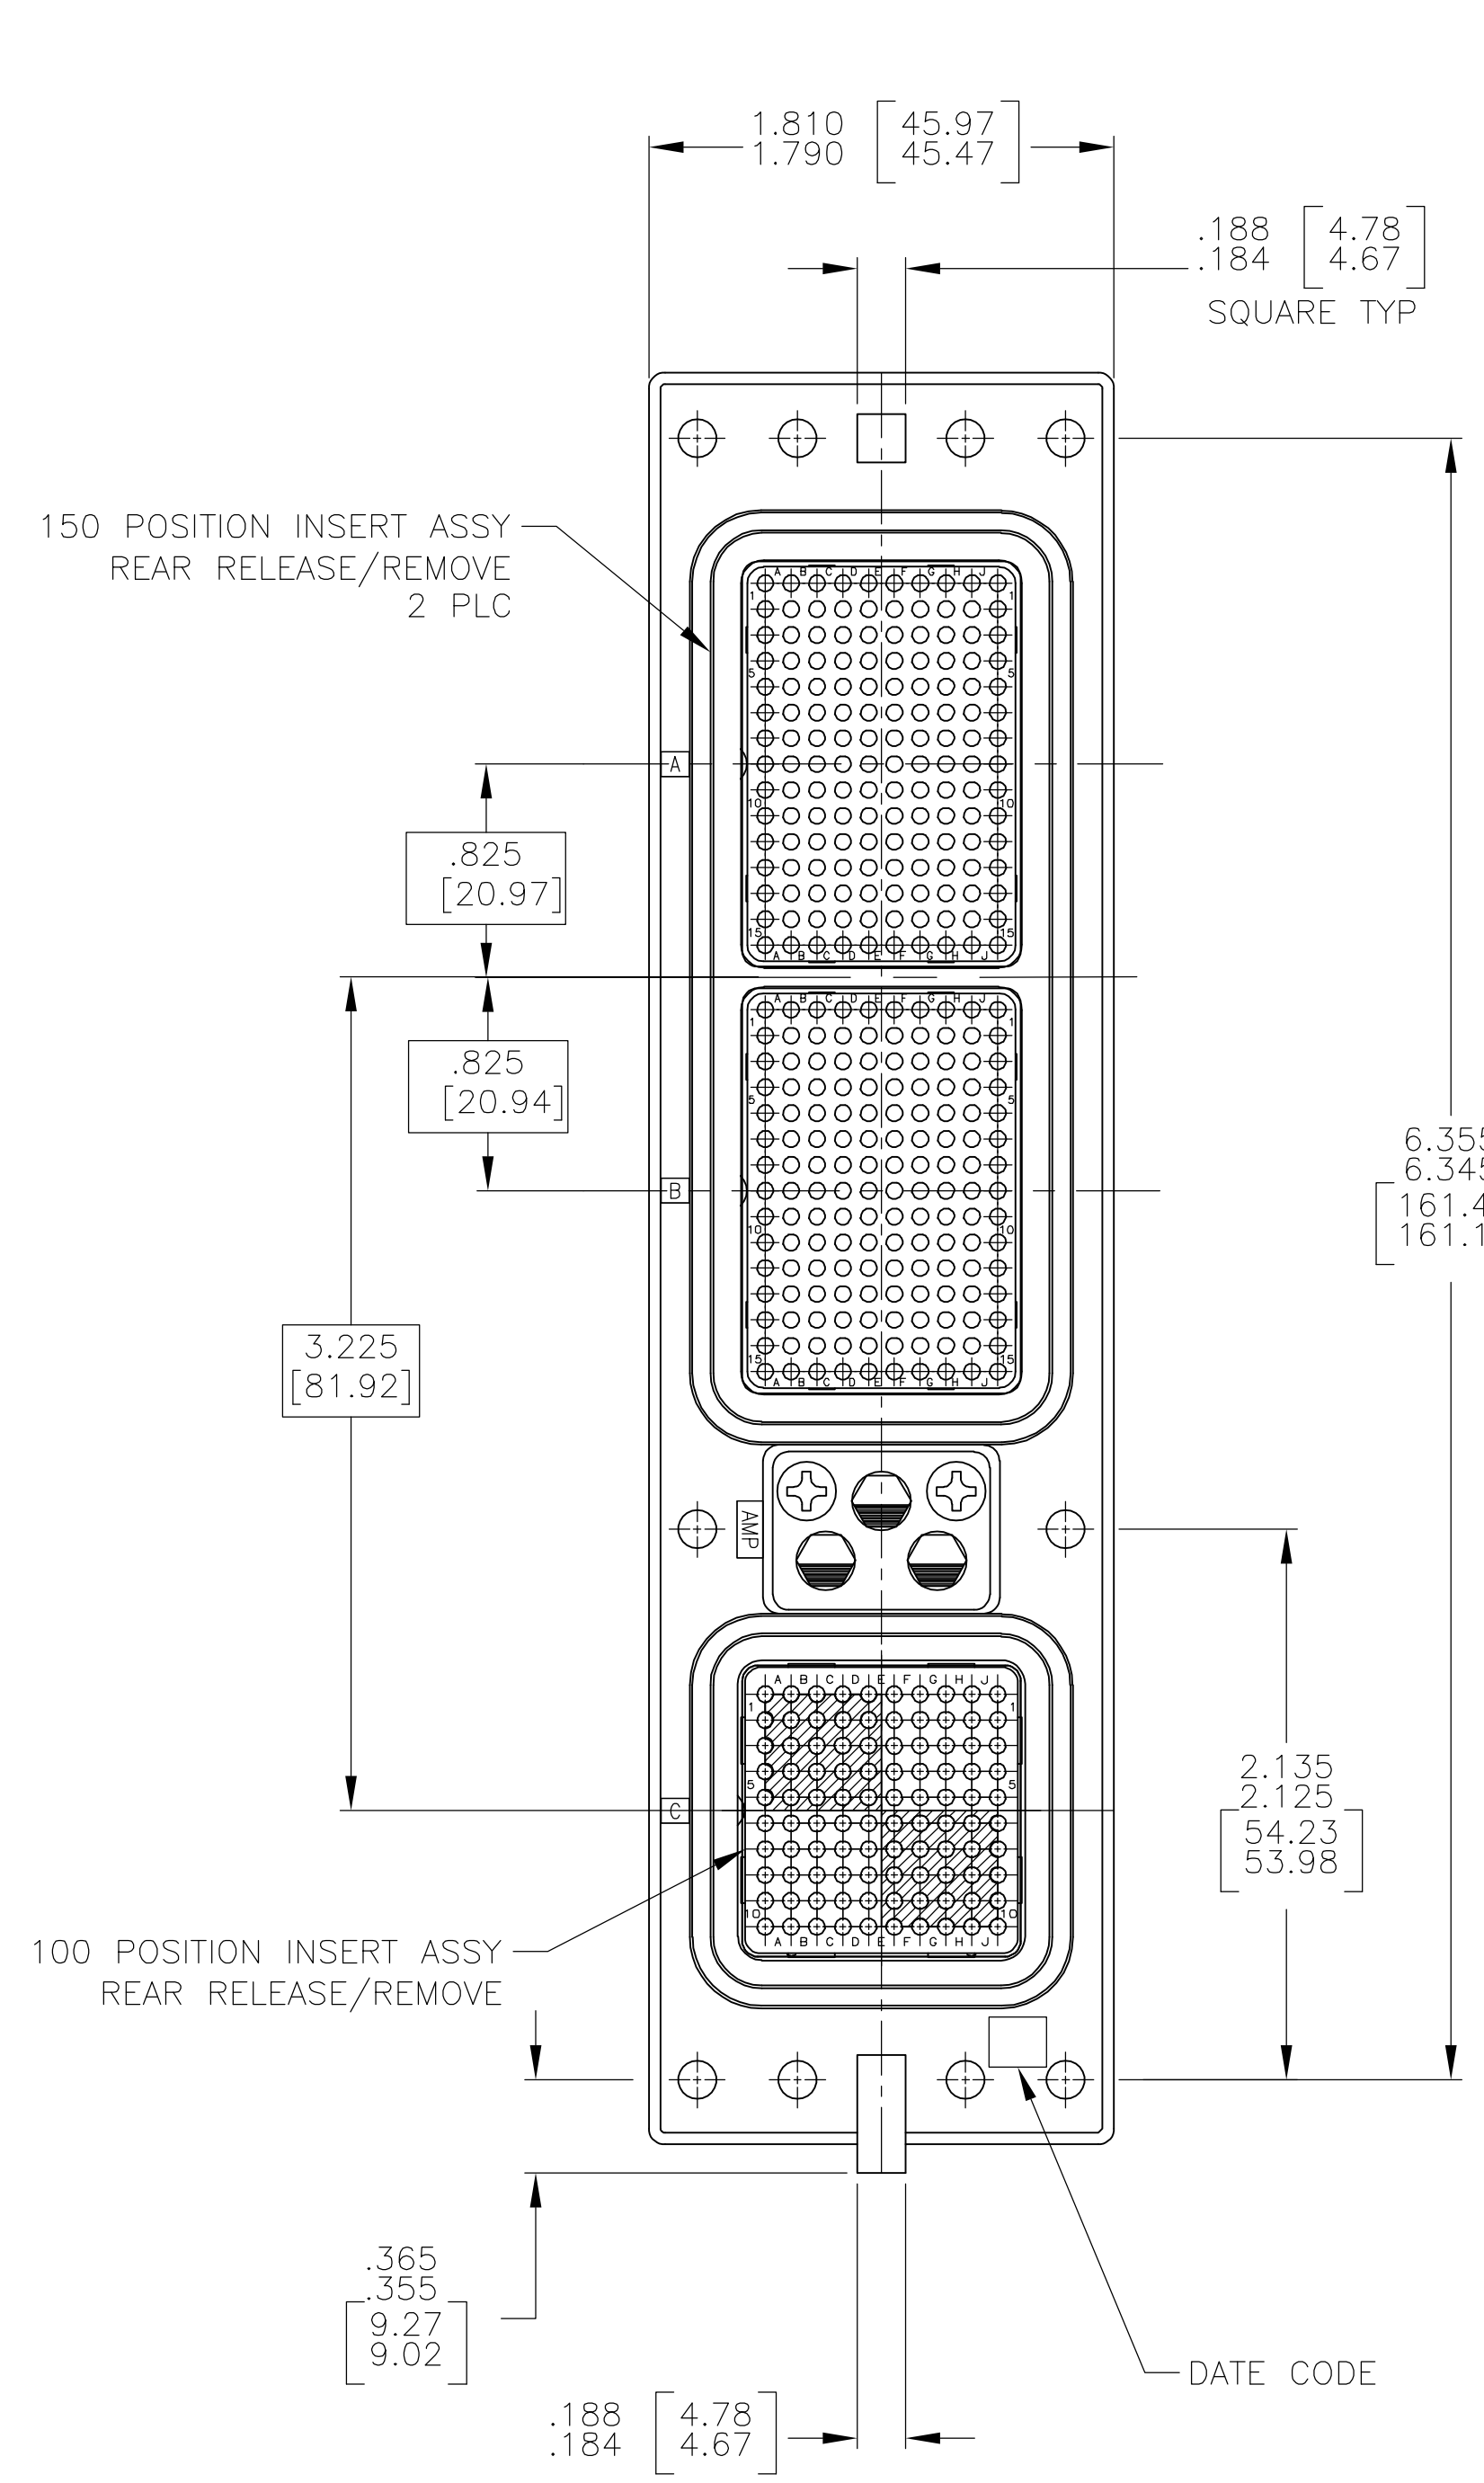

- CONNECTOR DIMENSIONS ARE PER ARINC 600 SPECIFICATION
  - FOLLOWING CONTACTS ARE INCLUDED AND NOT LOADED:  
 SIZE 22 SOCKET CONTACT: AMP P/N 208264-2; QTY: 400
- KEYING SHOWN IN POSITION "01" FOR REFERENCE ONLY. SEE TABLE FOR KEYING POSITION. FOR POSITION "00" KEYING SHIPPED UNASSEMBLED.

COMPONENT	MATERIAL	FINISH
SHELL	DIE CAST ALUMINUM PER ASTM-B-85	CHEMICAL COVERSION COATING PER MIL-C-5541, CLASS 1A
INSERT RETENTION PLATES	ALUMINUM ALLOY PER ASTM-B-209	CHEMICAL COVERSION COATING PER MIL-C-5541, CLASS 1A
SCREWS AND LOCKWASHERS	STEEL OR STAINLESS STEEL	CHROMATE OVER ZINC OR PASSIVATED
POLARIZING KEYS	ZINC ALLOY PER ASTM-B-86	-
INSERTS	THERMOSET OR THERMOPLASTIC PPS PER MIL-M-24519	-
POLARIZING KEY RETAINING PLATE	ALUMINUM ALLOY PER ASTM-B-209	BLUE ANODIZED PER MIL-A-8625
-	-	-

NIC66G26B01AA0	01	1883070-1
DESCRIPTIVE NUMBER	KEYING POSITION	PART NUMBER
THIS DRAWING IS A CONTROLLED DOCUMENT. DWN: C.C. THOMAS 9-30-05 CHK: K. HOGAN 10-3-05 APPV: K. HOGAN 10-3-05 NAME: RCPT ASSY, SIZE 2, SEALED, ARINC 600 (150/150/100) PRODUCT SPEC: APPLICATION SPEC SIZE: A1 CAGE CODE: 00779 DRAWING NO: 1883070 WEIGHT: CUSTOMER DRAWING SCALE: 1.5:1 SHEET 1 OF 1 REV 0		

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)