


REV. C
DCO 300783

TOLERANCES $\pm .010"$ - UNLESS OTHERWISE SPECIFIED

COIL: @ 25°C
 RESISTANCE _____ 500 OHMS $\pm 10\%$
 NOMINAL VOLTAGE _____ 28 VDC
 MUST OPERATE _____ 13.5 VDC MAX.
 _____ TRANSIENT SUPPRESSION - 42 VDC MAX.
 MUST RELEASE _____ 5.5 VDC MAX., 2.3 VDC MIN.

CUSTOMER DATA SHEET

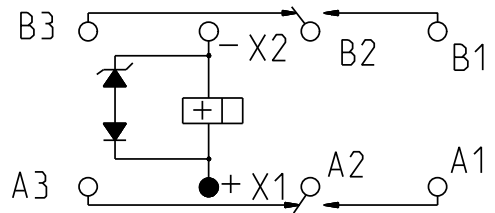

TERMINAL VIEW

ENVIRONMENT:
 VIBRATION _____ 70 Hz TO _____ 3000 Hz @ _____ 30 g's
 SHOCK _____ 200 g's _____ 6 MS. DURATION
 TEMPERATURE _____ -70 °C TO _____ +125 °C
 NOTES: _____ OPERATE, RELEASE 5 MS MAX.
 _____ CONTACT STABILIZATION 2.5 MS MAX.
 _____ CONTACT BOUNCE 1 MS MAX.
 _____ CONTACT BREAK BOUNCE 0.1 MS MAX.

CONTACT RATING: _____ LOW LEVEL
 TO 5 AMPS 28 VDC, 115 VAC 400 Hz RESISTIVE,
 100,000 OPERATIONS

DR. B.D. 11MAR2008 CK. J.M.B. 3/17/08

Tyco Electronics ©COPYRIGHT 2005
 TYCO ELECTRONICS CORPORATION
 ALL INTERNATIONAL RIGHTS RESERVED

CUST. _____ M83536/2-023M
 CUST. NO. _____ REV. _____

TE NUMBER
 4-1617758-8

CII PART NUMBER
 FCB-205-0223M

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)