


THERMOFIT • SPECIFICATION CONTROL DRAWING • MOLDED PARTS

1. All dimensions are in inches; all angles are in degrees.
2. Dimensions appearing in table below are as follows:
a - As supplied b - After unrestricted recovery
3. Weight shown in table of dimensions is based on polyolefin part.
4. Molding ports are optional. When specified, they will be located as shown. Order 323A211-3-00 when molding ports are required.

If this document is printed it becomes uncontrolled.
Check for the latest revision.

NOTES

ORDERING INFORMATION

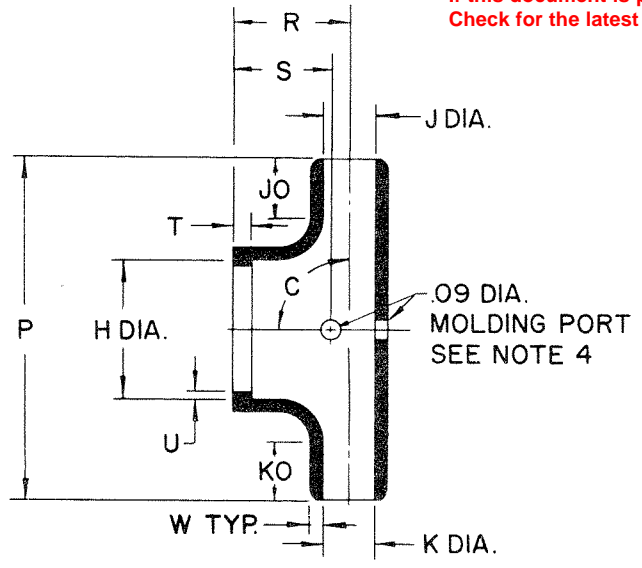

Mat. No.	Description	Rayclad Matl. Spec.	Specific Grav. Max.
3	Polyolefin	RT 301	1.40
4	Flex Poly	RT 304	1.40
25	Elastomer, fluid resistant	RT 1325	

Add material number as suffix to part number;
Example - Order 323A211-3 when polyolefin is required.

TABLE OF DIMENSIONS

PART NO.	H		J & K		P ±10%		R ±10%		S ±10%		T ±20%		U ±20%		JO & KO ±10%		W ±20%		C ±10° ±5°	
	Min a	Max b	Min a	Max b	a	b	a	b	a	b	a	b	a	b	a	b	a	b	a	b
323A211-	1.73	.65	1.00	.26	-	1.60	-	.54	-	.45	-	.09	-	.03	-	.29	-	.06	150	90
PART NO.	Weight lbs ±10%																			
323A211-	.006																			

Raychem

E.O.	REV. DATE	DESCRIPTION	DRN	DD	PART DESCRIPTION	PART NO.	REV LTR
	A 8/71	Flex Poly added.	CHK D	KT	BOOT, T, WITH LIP	323A211	B
			AUTH	RAP		DATE	November 21, 1983
			AUTH	HOP			

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)