

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION



20

© COPYRIGHT 20 BY -



ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	25JUN2015	DW	CW

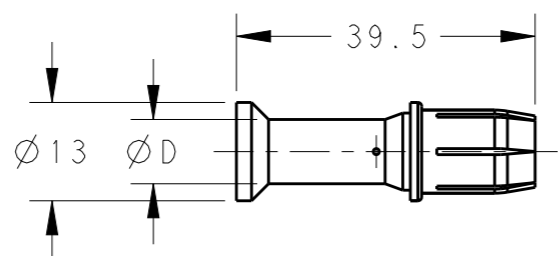

1) Ød=4.3, 5.5, 7.0


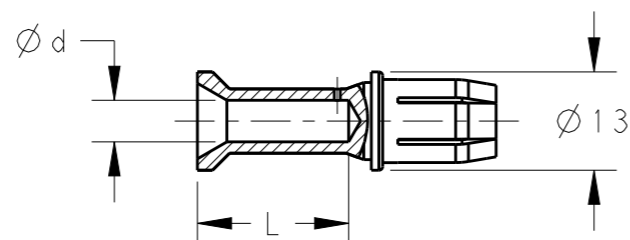


NOTES:



- 1. TECHNICAL CHARACTERISTICS:  
 CONTACT MATERIAL: BRASS  
 SURFACE PLATING:  
 SILVER PLATING:  $\geq 2\mu\text{m}$   
 CONTACT RESISTANCE:  $\leq 0.5\text{m}\Omega$   
 WIRE RANGE: SEE TABLE  
 OPERATION TEMPERATURE:  $-40\sim+125^\circ\text{C}$

注释:

- 1. 技术参数:  
 公针材料: 黄铜  
 表面电镀:  
 镀银:  $\geq 2\mu\text{m}$   
 接触电阻:  $\leq 0.5\text{m}\Omega$   
 接线范围: 见表格  
 工作温度:  $-40\sim+125^\circ\text{C}$

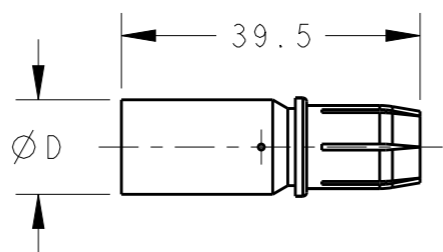

2) Ød=8.2

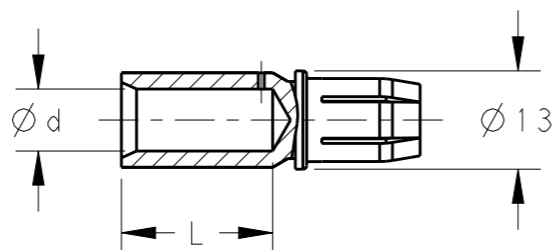

PART NUMBER	Ød	ØD	WIRE GAUGE	STRIPPING LENGTH
			MM <sup>2</sup>	L (mm)
T2050002010-000	4.3	5.6	10	20
T2050002016-000	5.5	8.5	16	
T2050002025-000	7.0	10.0	25	
T2050002035-000	8.2	12.5	35	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 25JUN2015 David Wang	<b>STE</b> TE Connectivity	
DIMENSIONS: mm		CHK 25JUN2015 Chris Wang		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 25JUN2015 Xiang Xu	NAME CNF SOCKET CONTACT	
0 PLC ±-		PRODUCT SPEC 108-137058	SIZE	
1 PLC ±-		APPLICATION SPEC 108-137058	CAGE CODE	
2 PLC ±-		WEIGHT	DRAWING NO	
3 PLC ±-		Customer Drawing	RESTRICTED TO	
4 PLC ±-			A300779	
ANGLES ±-			C-T20500020XX000	
FINISH			SCALE 1:1	
-			SHEET 1 OF 1	
-			REV A	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)