
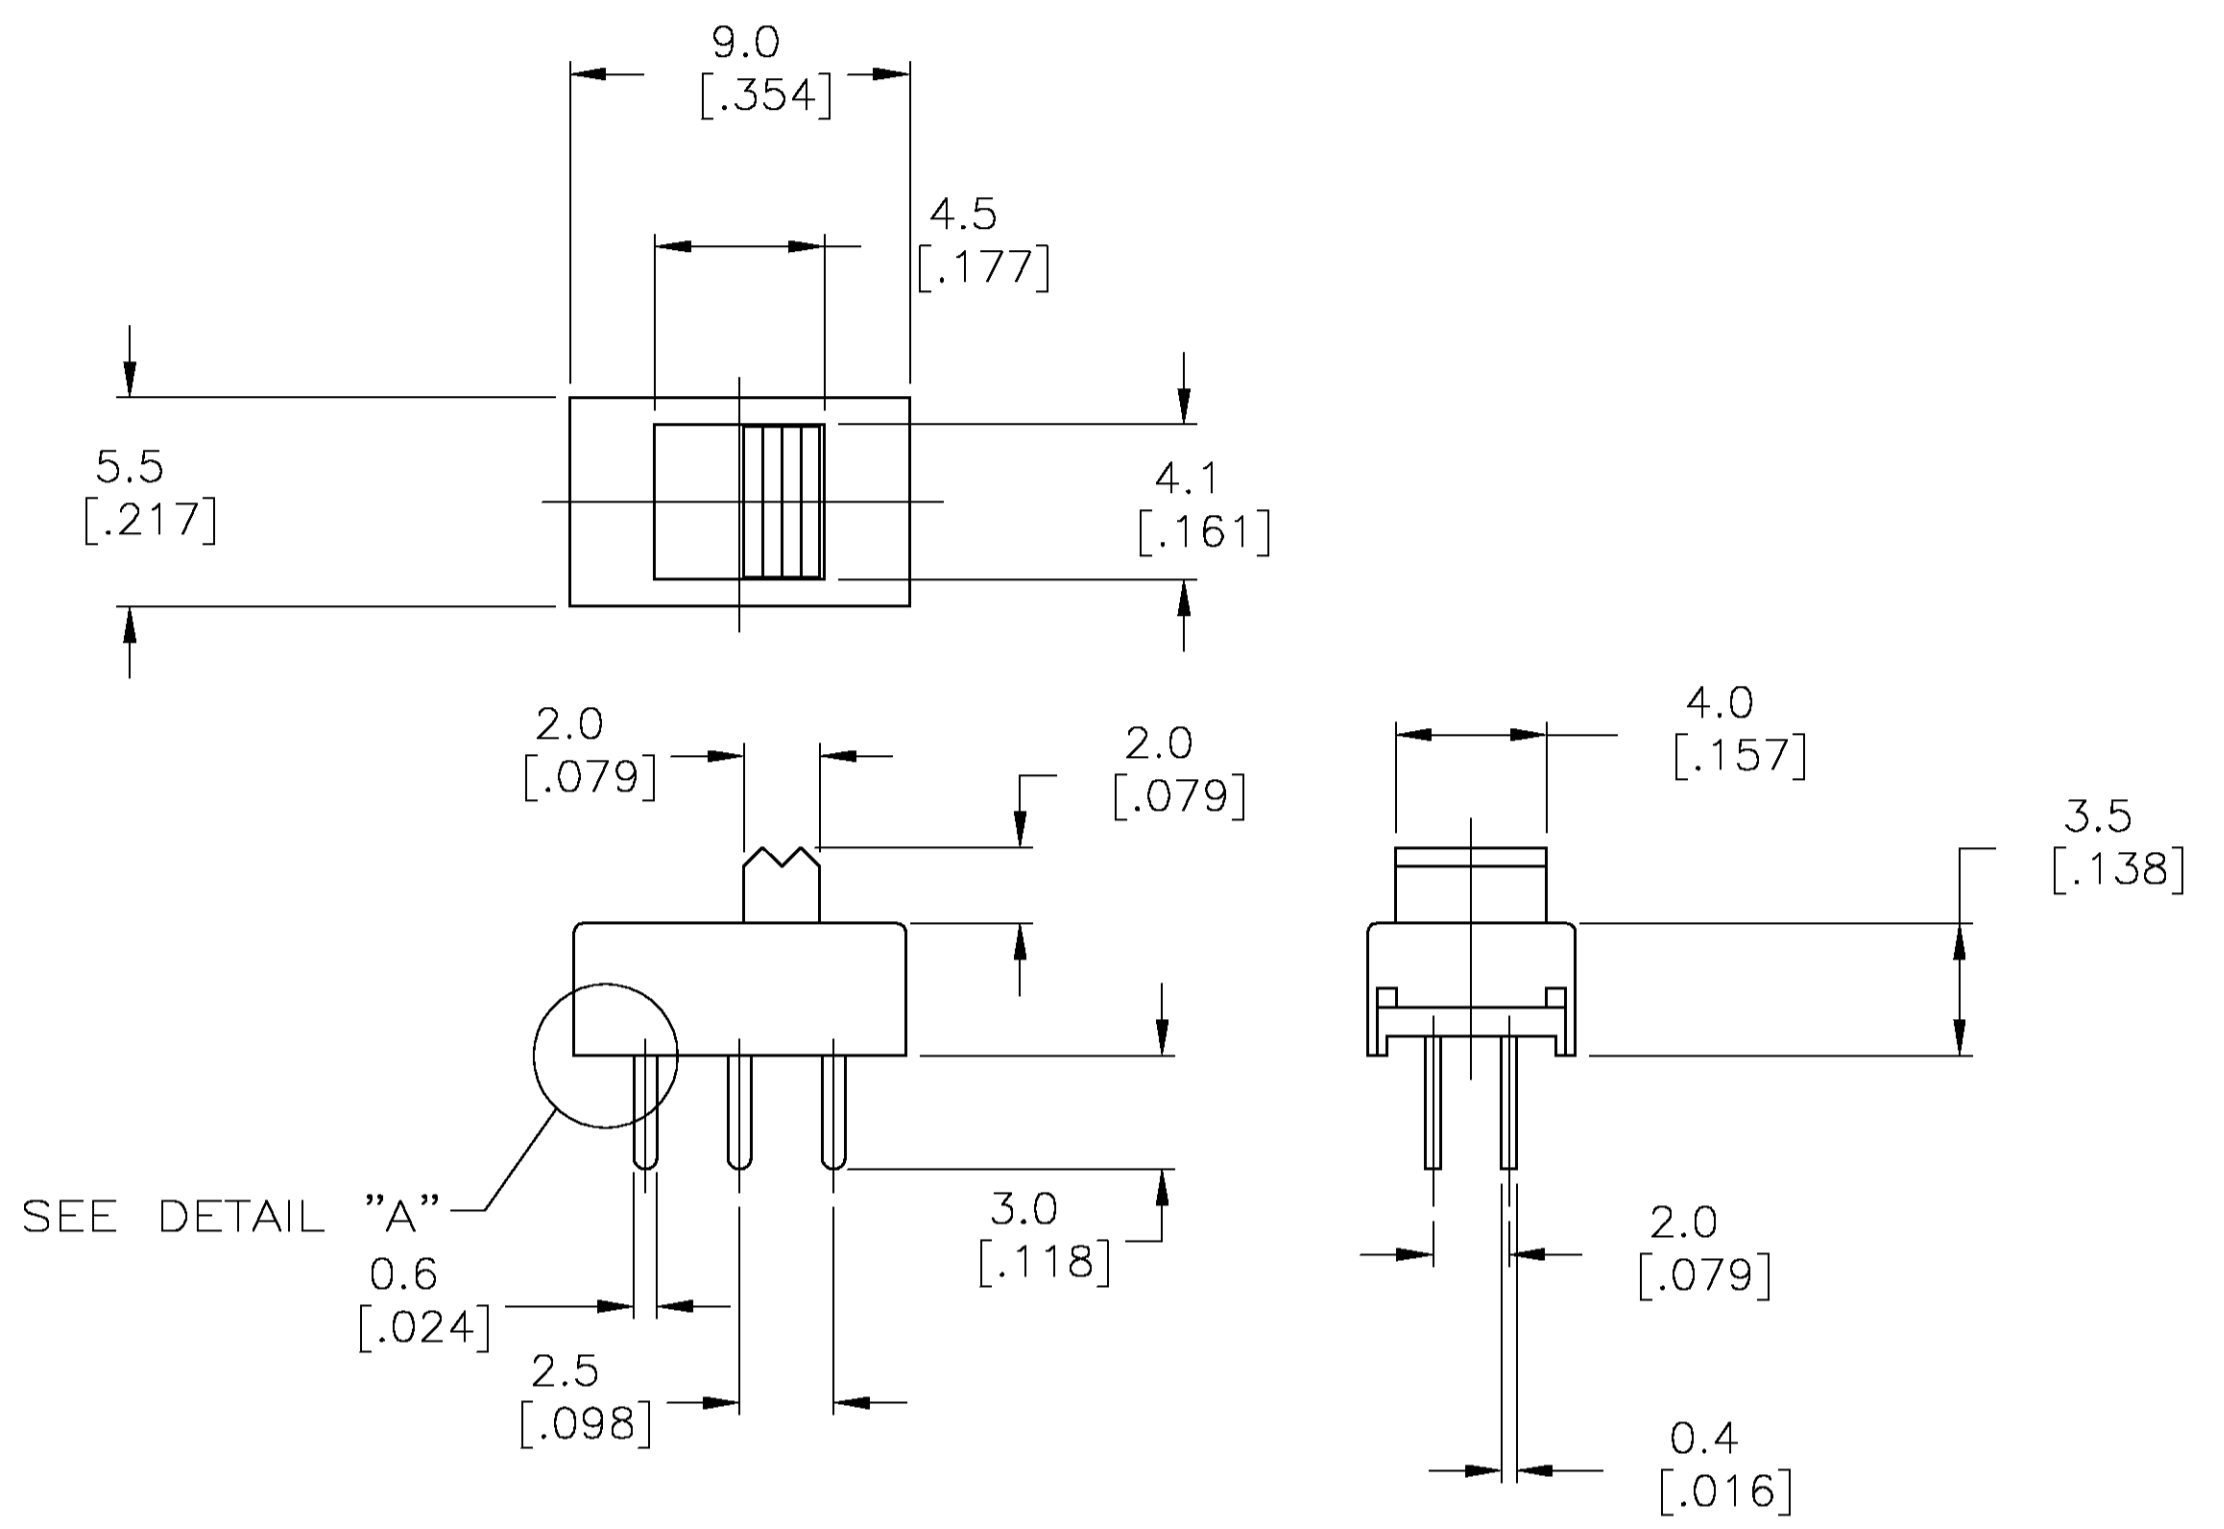


**BREAK-BEFORE-MAKE**  
**Specifications:**  
**Materials:**  
 Case, PPS UL94V-0, Black  
 Cover, Polyamide UL94-HB, Black  
 Actuator, Polyamide, UL94-HB  
 Moving Contact, Copper Alloy-Plate Silver or Gold over Nickel  
 Fixed Contact/Terminal, Copper Alloy-Plate Silver or Gold over Nickel






**Electrical:**  
 Contact Rating, (Silver)100mA@30VDC, (Gold) .4VA @ 20V DC, Per EIA-448, Method 6  
 Initial Contact resistance, 30 milliohms max, Per EIA-364-23B, each position  
 Insulation Resistance, 100 Megohm min. Per EIA-364-21C each position  
 Dielectric strength, 500 V AC for 1 minute, Per EIA-364-20B, Condition 1, each position

**Mechanical:**  
 Actuation force, 250 +/-150 grams  
 Actuation Travel, .098  
 Life Expectancy, 10,000 cycles, Per EIA-448  
 Methods 8 and 9 12-15 cycles/min.  
 Vibration, Per EIA 364-28D, Condition VII, Level E  
 Mechanical Shock, Per EIA-364-27C, Condition A

**Environmental:**  
 Operating Temperature, -20 to +85 degrees C, Per EIA-448, Method 10  
 Storage Temperature, -40 to +100 degrees C  
 Humidity and Temperature Cycling (Silver), Per EIA-364-31B, Method III  
 Mixed Flowing Gas (Gold), Per EIA-364-65A, Class IIIA, 20 days  
 Thermal Shock, Per EIA-364-32C, -40 to +100 degrees C  
 Solderability, Per EIA-364-52, Class 2, Category 1, 95% Minimum coverage  
 Resistance to Solder Heat, Per EIA-364-56A, Procedure 3, Cond. B

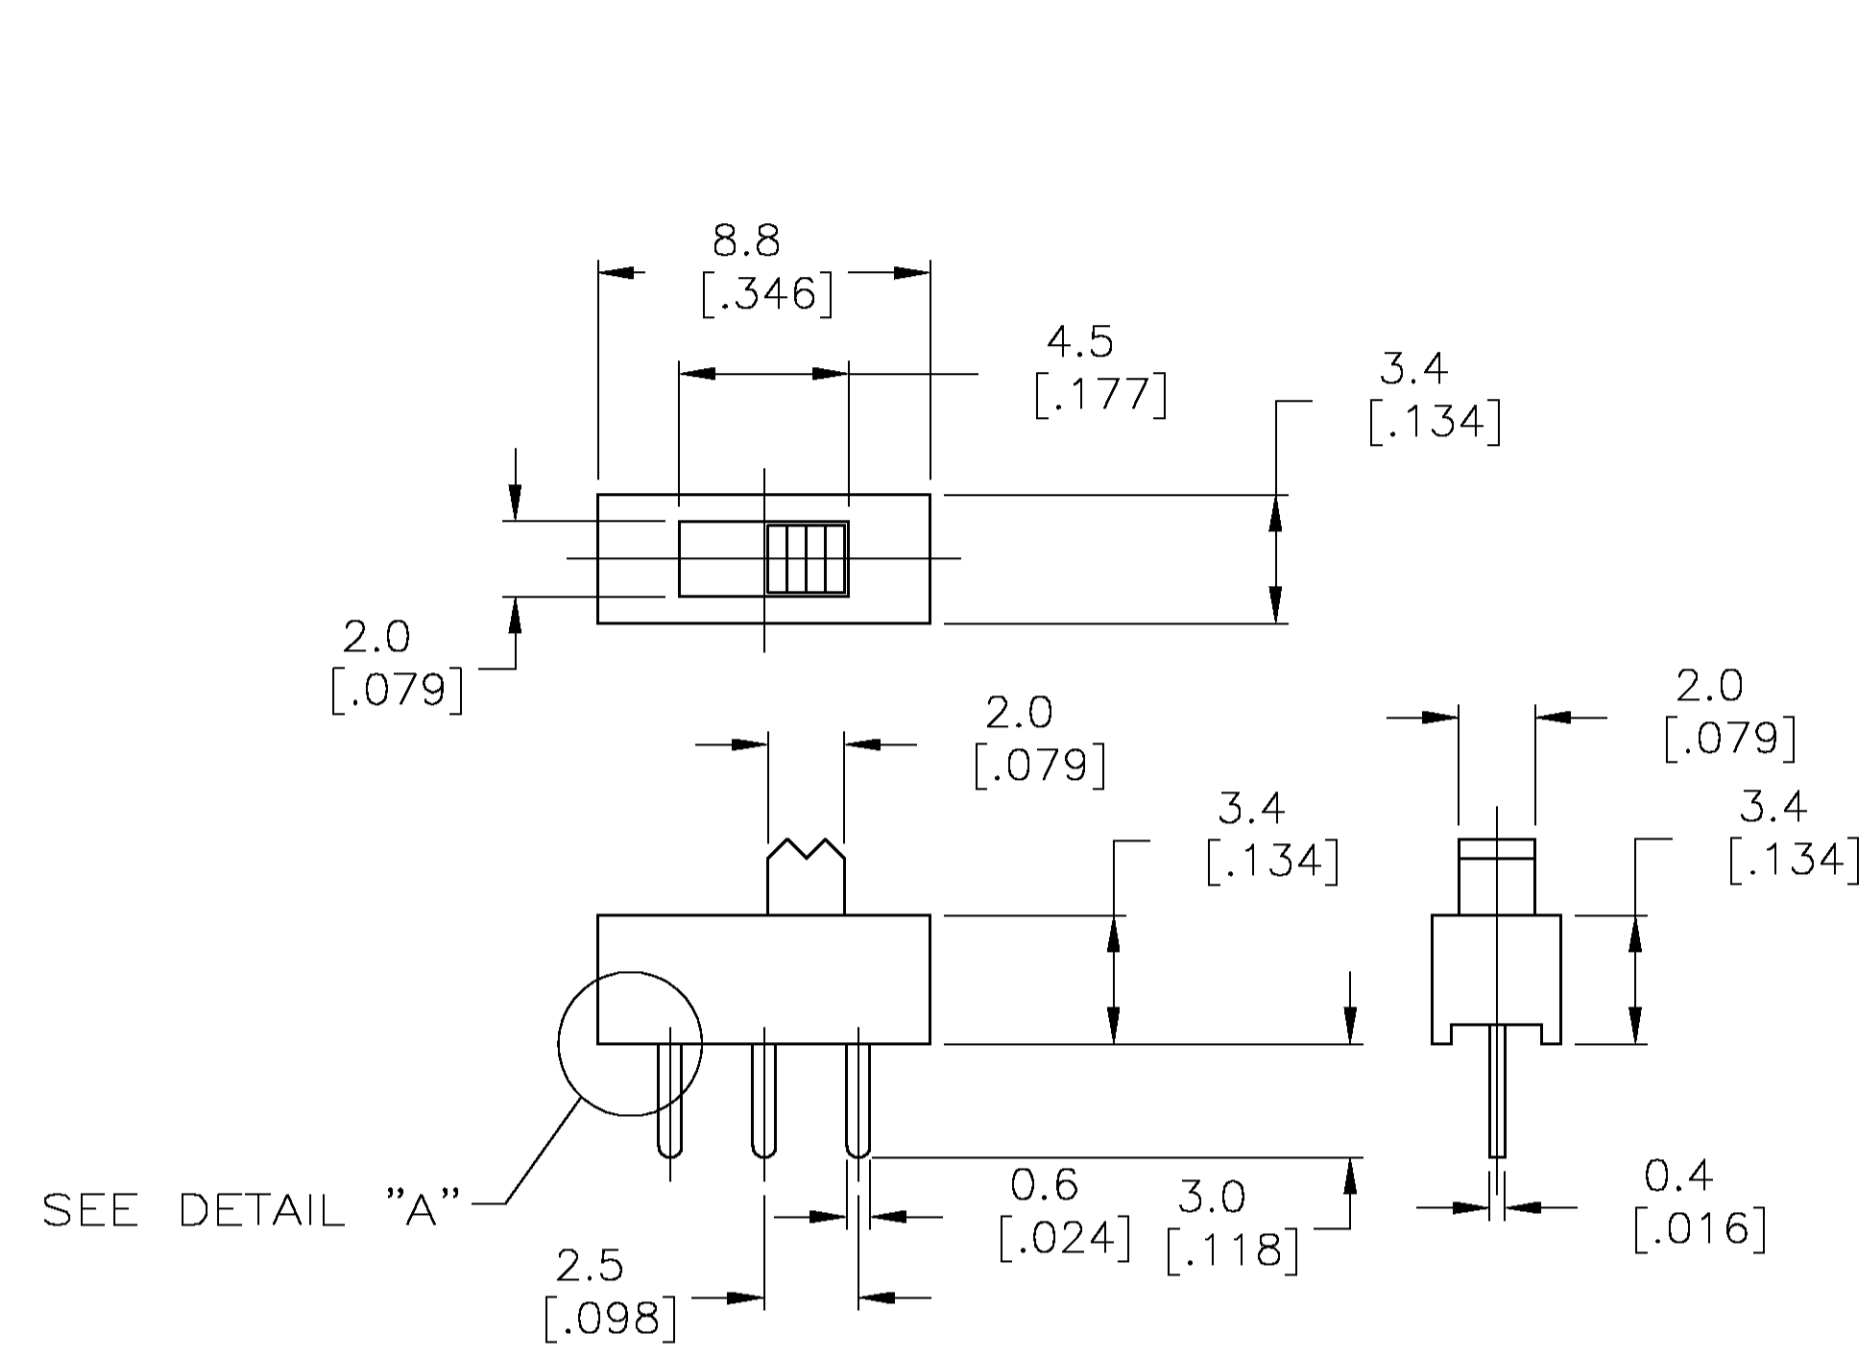

1. TESTING TO BE COMPLETED PER 102-2469.

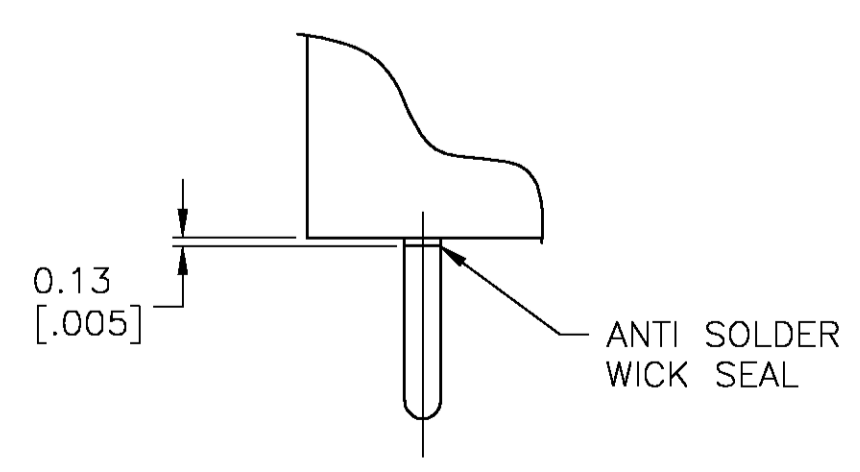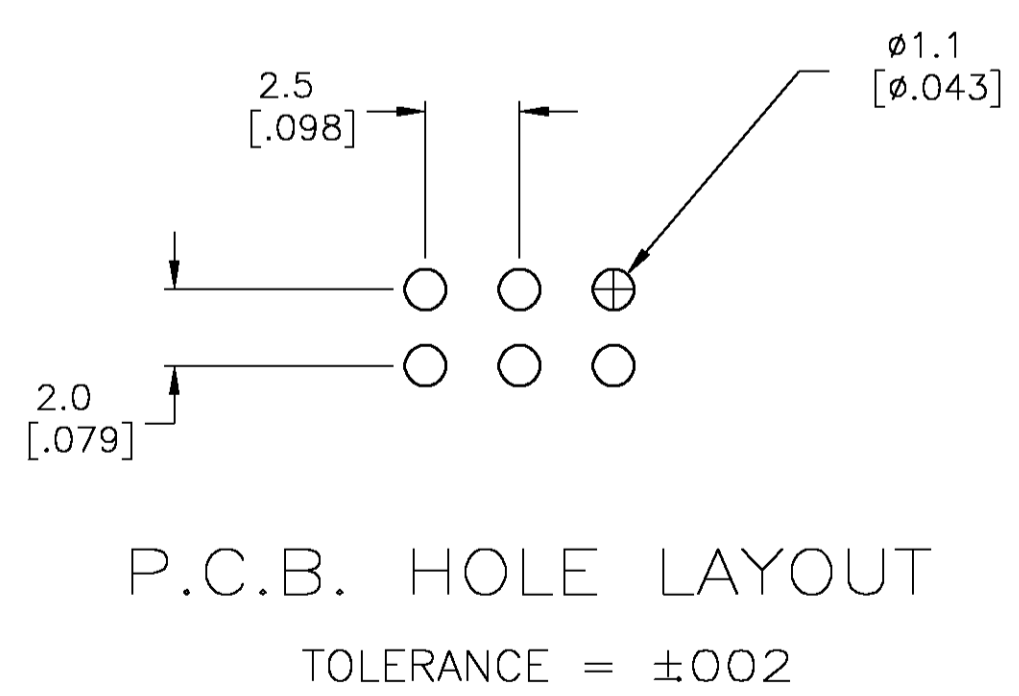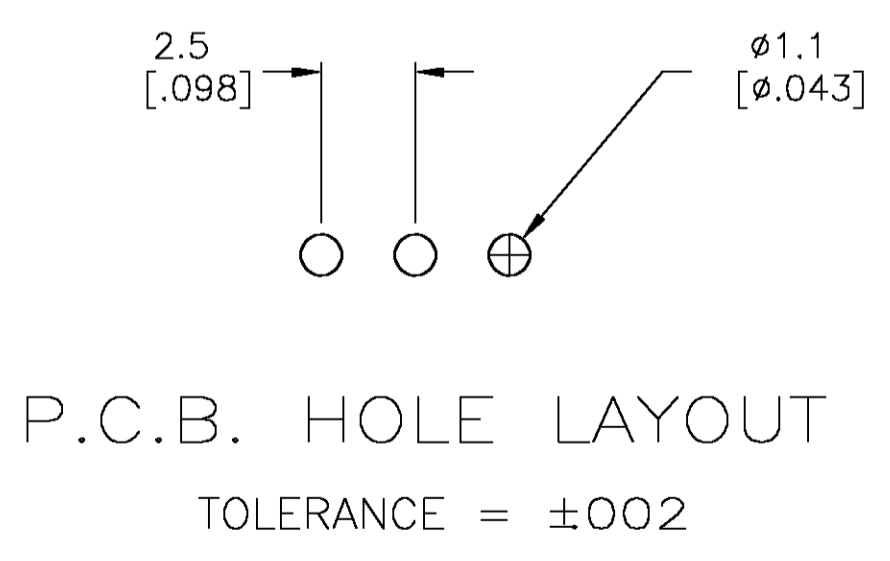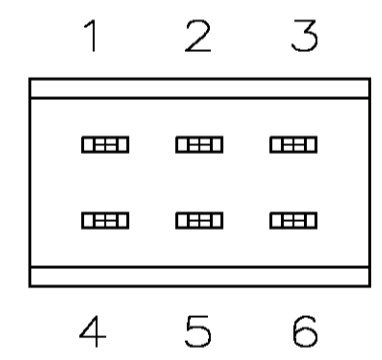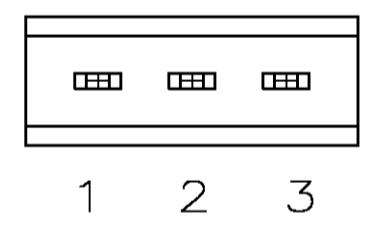

DETAIL "A"  
 SCALE 8:1

1571981-4	SSA22G04	DPDT	GOLD	1-2, 4-5	2-3, 5-6
1571981-3	SSA2204	DPDT	SILVER	1-2, 4-5	2-3, 5-6
1571981-2	SSA12G04	SPDT	GOLD	1-2	2-3
1571981-1	SSA1204	SPDT	SILVER	1-2	2-3
TYCO P/N	ALCO P/N	TYPE	PLATING	LEFT	RIGHT

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWG NO. 23AUG04	Tyco Electronics Corporation	
DIMENSIONS: mm [INCHES]		CHK M. SARVER	Harrisburg, Pa 17105-3608	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPD M. SARVER	NAME	
0 PLC	± -	SLIDE SWITCH, LOW PROFILE		
1 PLC	± -	SSA 12 & 22 Series		
2 PLC	± 0.25[.010]	-		
3 PLC	± -	APPLICATION SPEC		
4 PLC	± -	SIZE		
ANGLES	± 1°	CAGE CODE		
MATERIAL	FINISH	DRAWING NO. A1 00779		RESTRICTED TO
		WEIGHT		SCALE 5:1
		CUSTOMER DRAWING		SHEET 1 OF 1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)