



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD		
J		REVISED PER ECO-13-015151	17DEC2013	FL	FY		

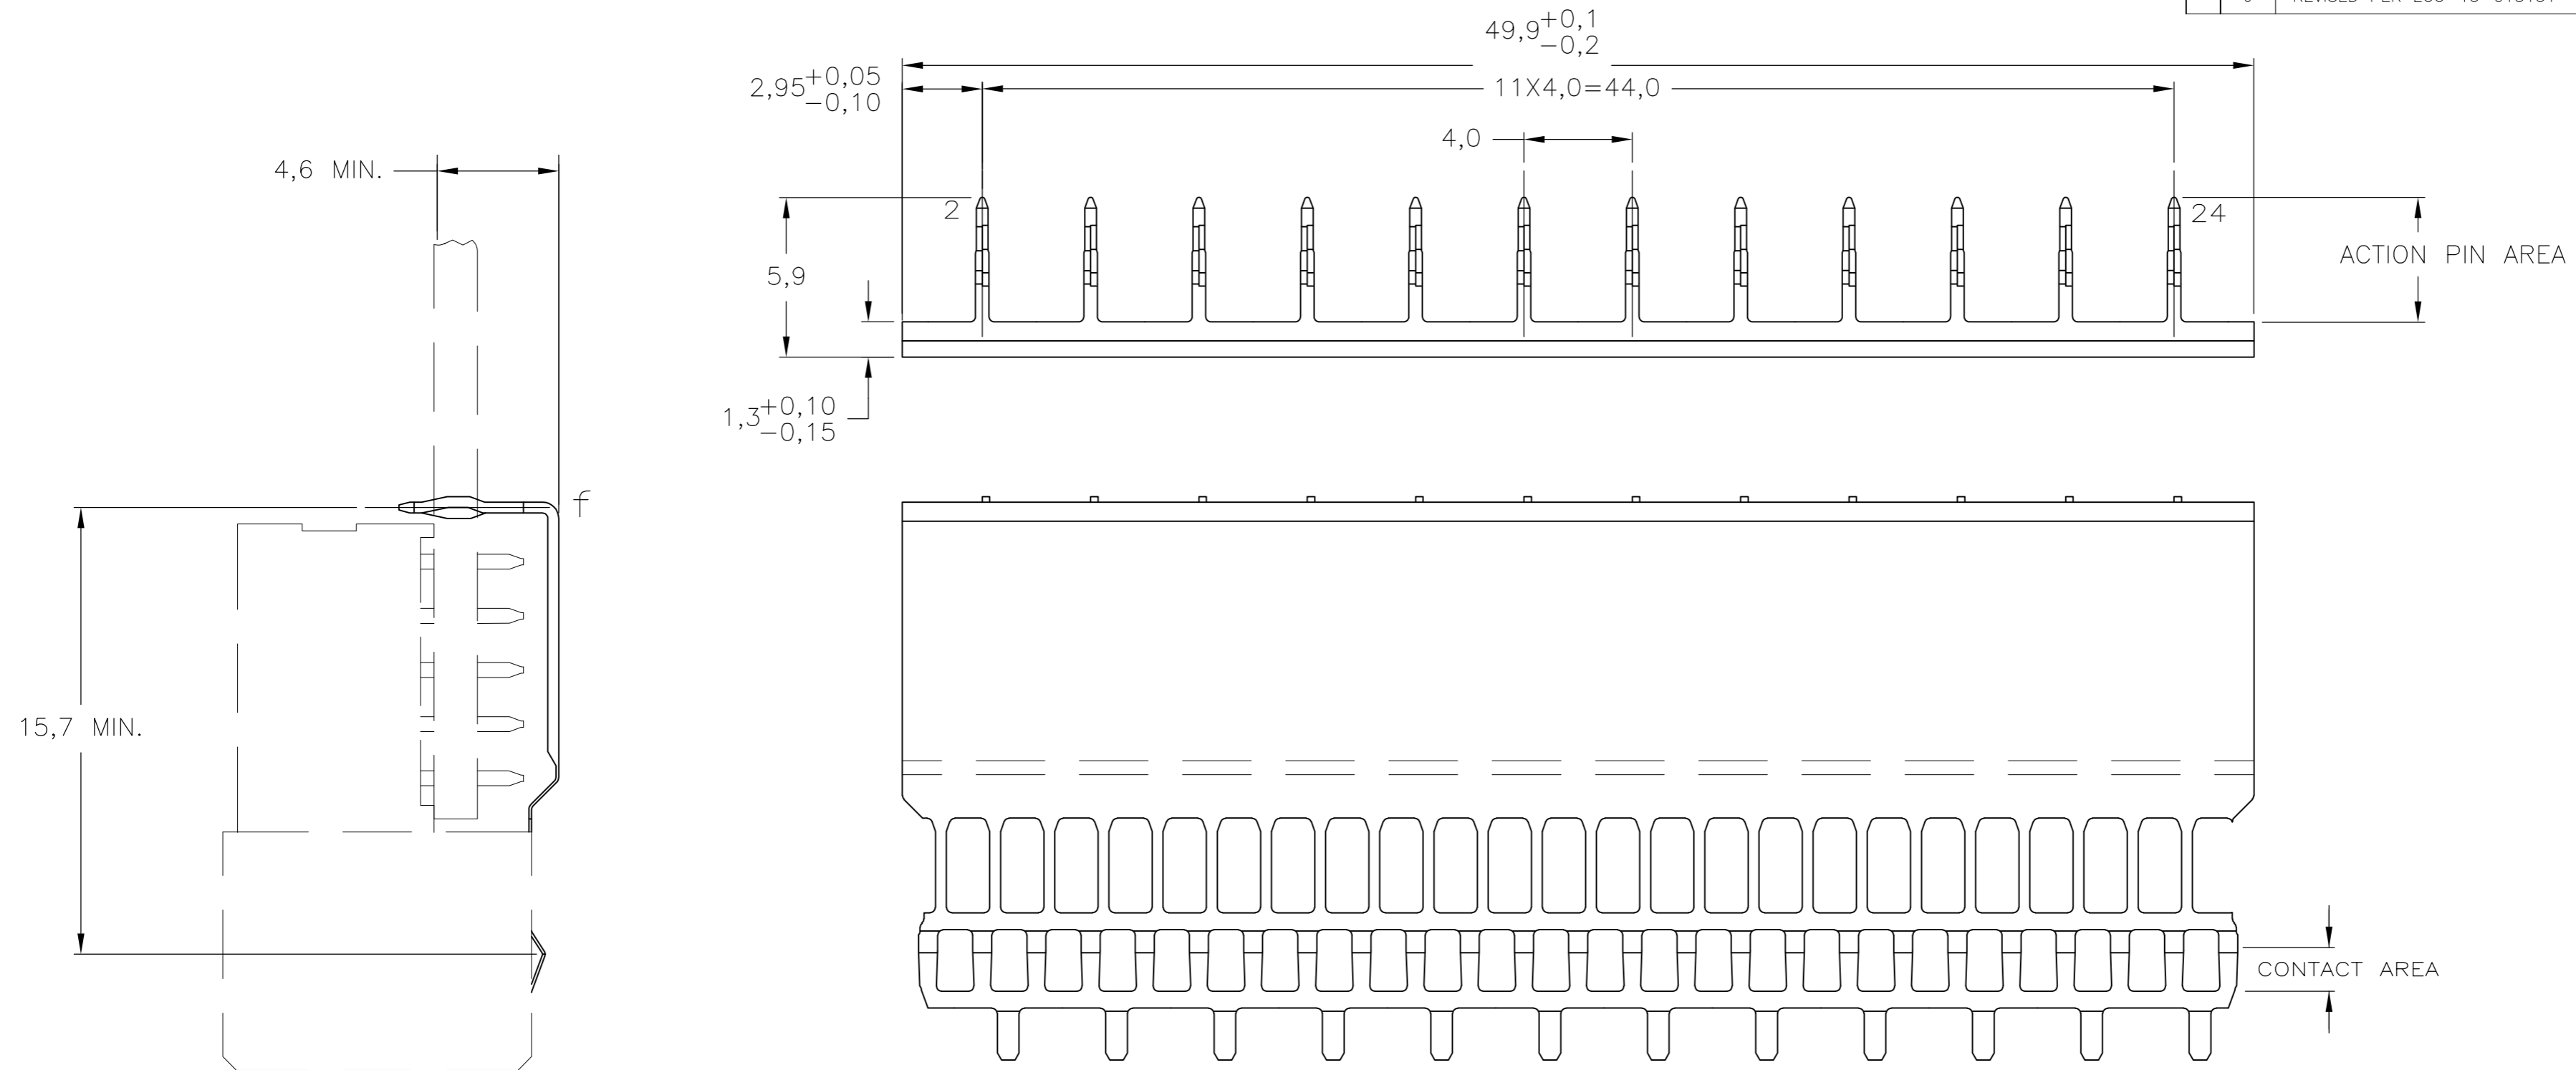

NOTES:

- ⚠ GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1,27µm NICKEL MIN. AND ACTION PIN: 0,5µm TIN-LEAD MIN. FOR PLATING OF MATING SURFACES SEE PERFORMANCE LEVEL SHOWN IN PART NUMBER TABLE.
- ⚠ MATERIAL: PHOSPHORBRONZE.
- ⚠ ROW "f" 12 PLATED THROUGH HOLES FOR LOWERSHIELD.
- ⚠ HOLE PATTERN FOR FEMALE CONNECTOR TYPE B-25 COLUMNS WITH UPERSHIELD, 125+13 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID.
- 5 MAX. BOARD THICKNESS 3,5 mm.
- ⚠ SHIELDS LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REF: TR-NWT-001217 ISSUE 1, SEPT. 1992.
- ⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 2.
- ⚠ CONFORMS TO ALL TESTING ACCORDING IEC 61076-4-101 PERFORMANCE LEVEL 1.
- ⚠ CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS.
- ⚠ 0,76µm MIN GOLD PLATING AT MATING SURFACE.

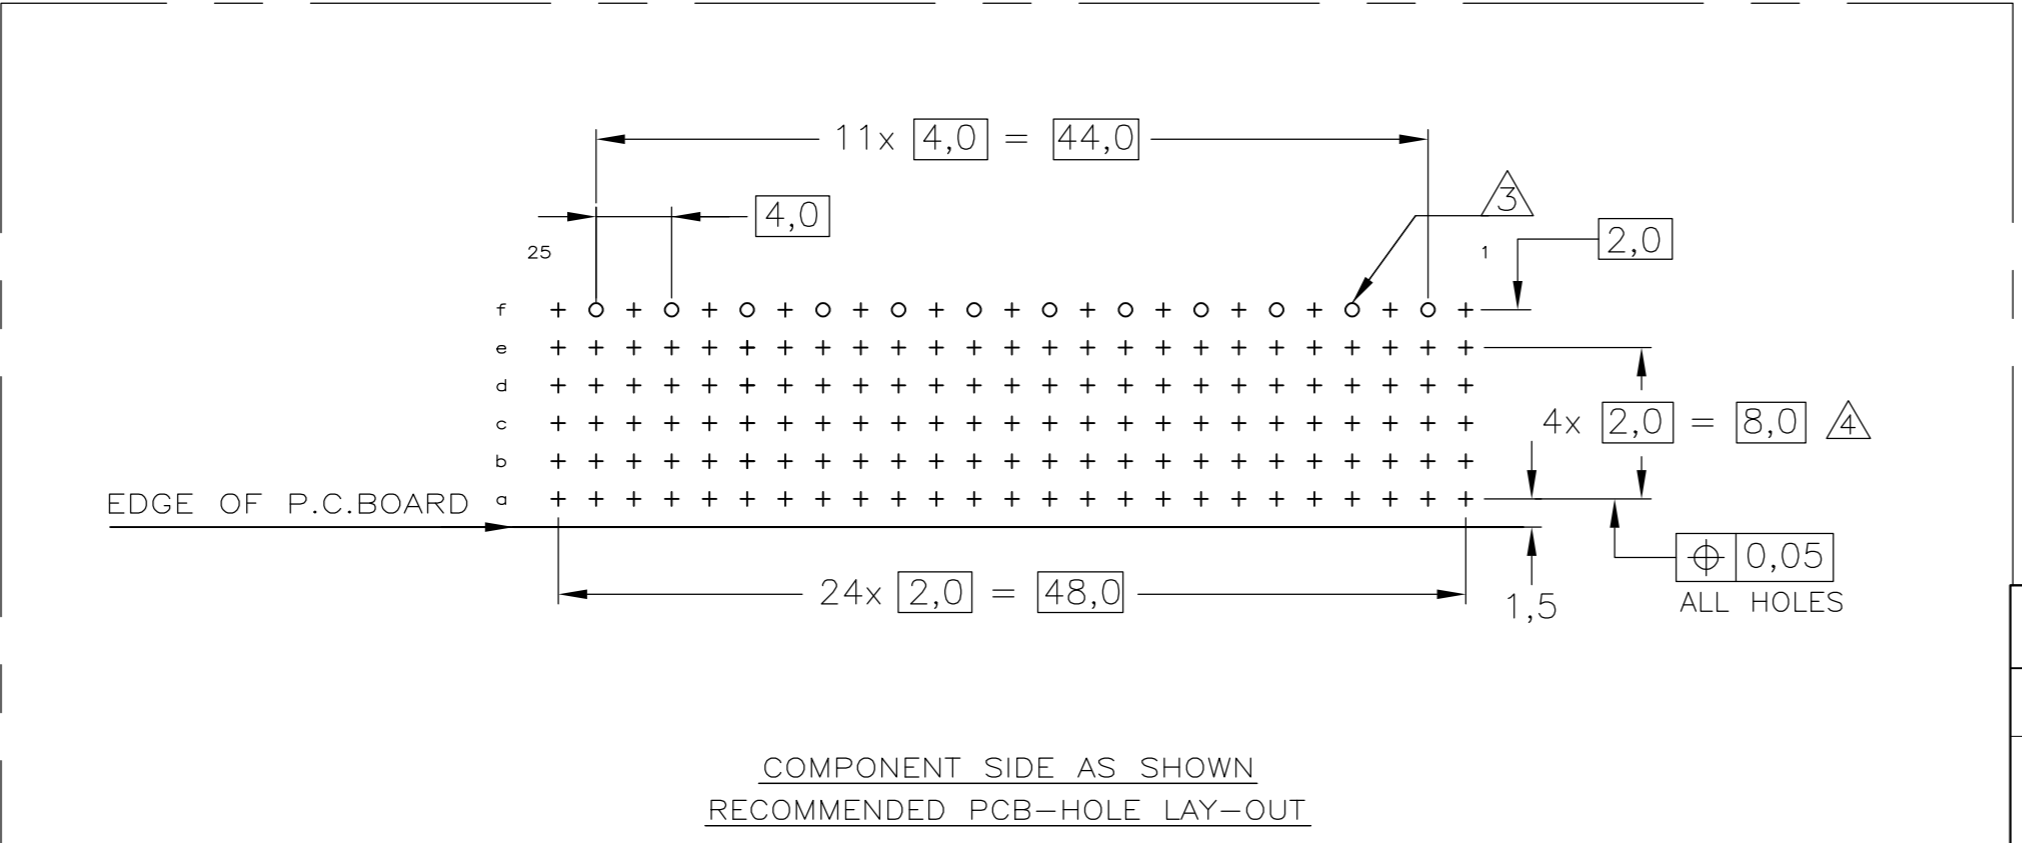

FINISH	MATERIAL	PARTNUMBER
⚠ ⚠ ⚠	⚠	4-338110-0
⚠ ⚠ ⚠	⚠	338110-9
⚠ ⚠	⚠	338110-2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. TRUREN 27-11-96			4-338110-0	
DIMENSIONS: mm		CHK W. v.d.HEIJDEN 27-11-96			TE Connectivity	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD F. v.KONINGSBRUGGE	NAME		Z-PACK 2mm HM	
0-PLG ±		PRODUCT SPEC	APPLICATION SPEC		GROUND RETURN LOWER SHIELD	
1-PLG ±		108-19082	DRAWING NO		TYPE B-25 COLUMNS	
2-PLG ± ±0.2		114-19029	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
3-PLG ±		WEIGHT	A2	00779	C=338110	-
4-PLG ±		FINISH	SCALE		SHEET	REV
ANGLES ±		CUSTOMER DRAWING		5:1	1 of 1	J

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)