

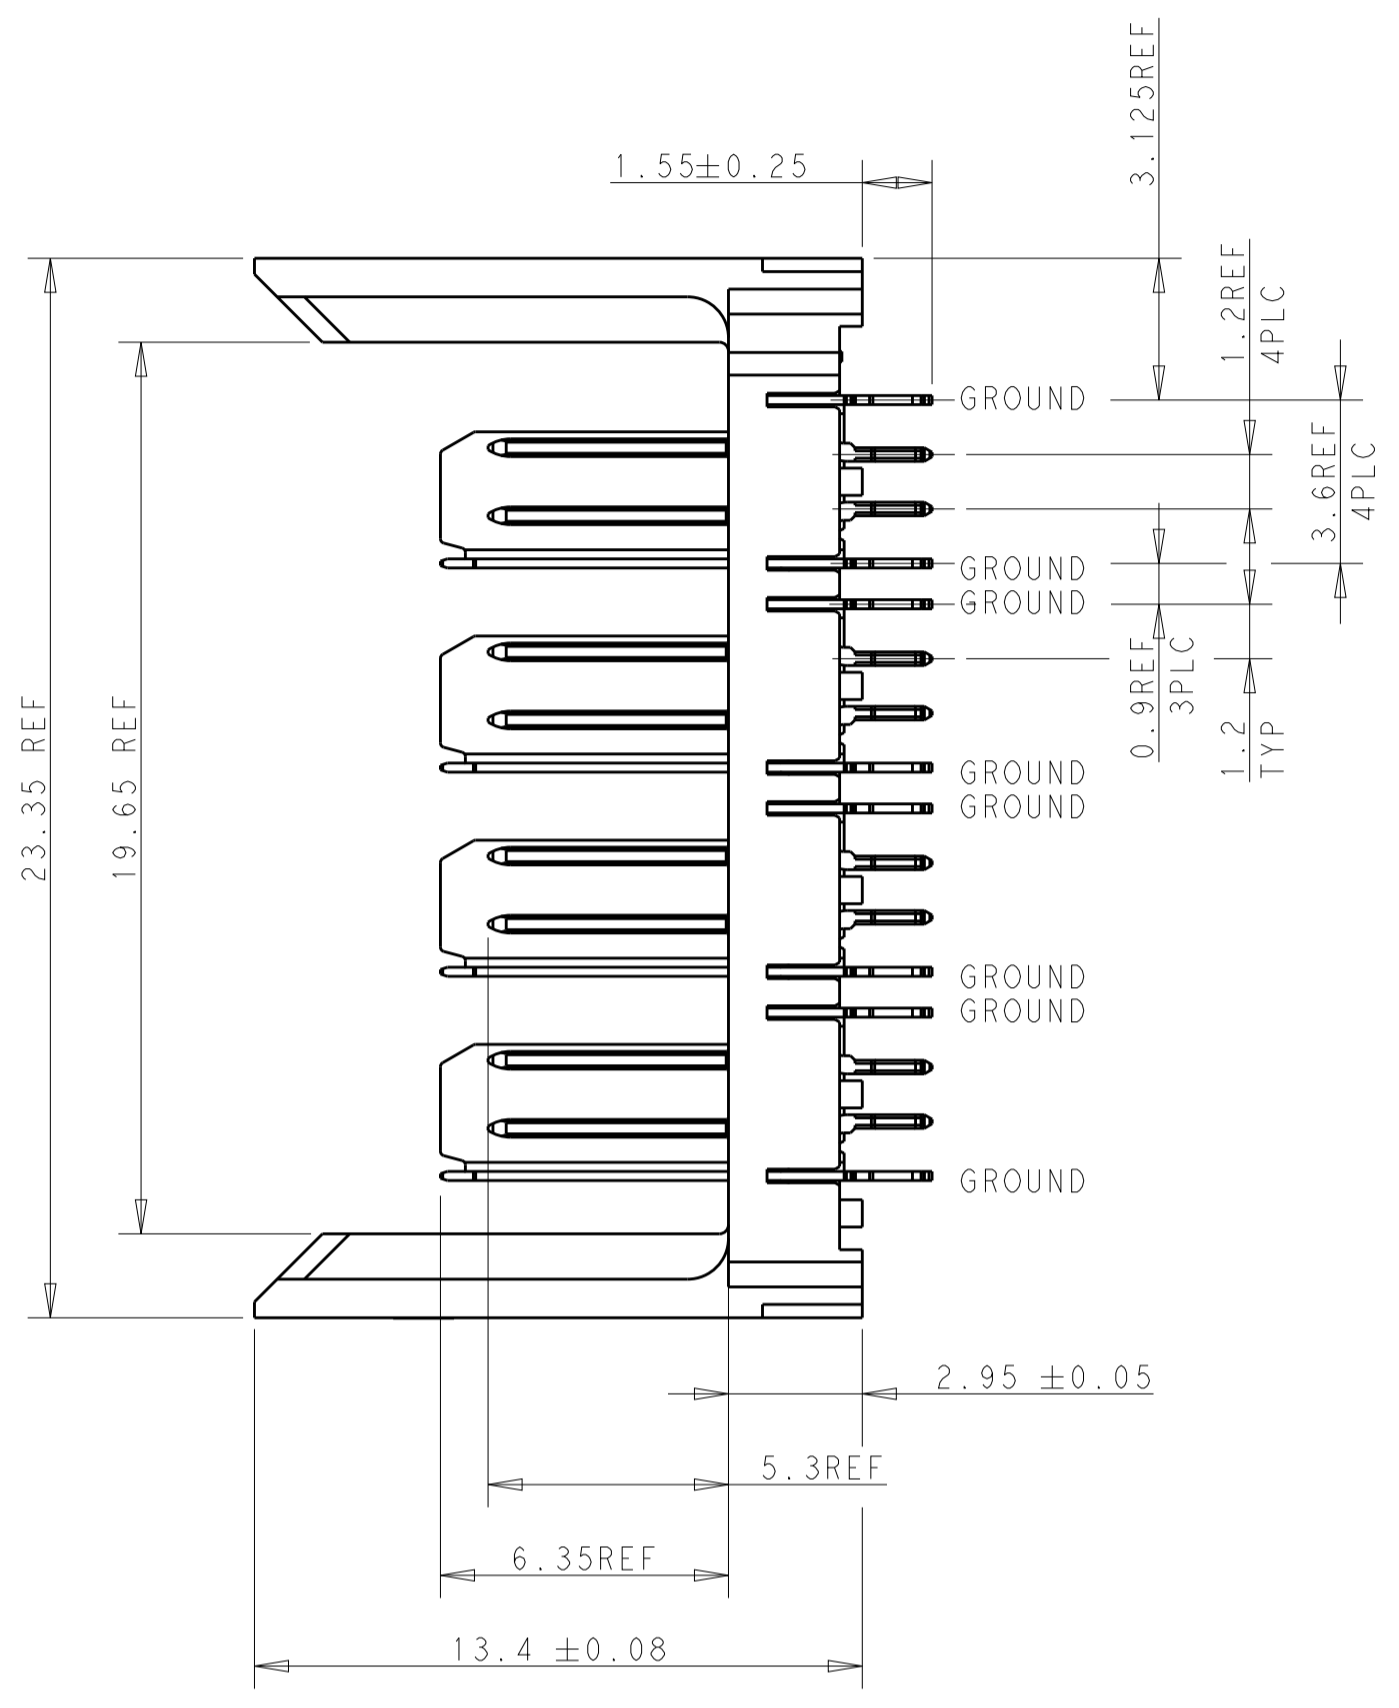



REVOLUTIONS		DATE	DMN	APVD
LOC	DIST	REV	LTN	DESCRIPTION
A				INITIAL RELEASE
B				PER ECR-13-008109
C				PER ECR-15-012191
D				PER ECO-18-007505

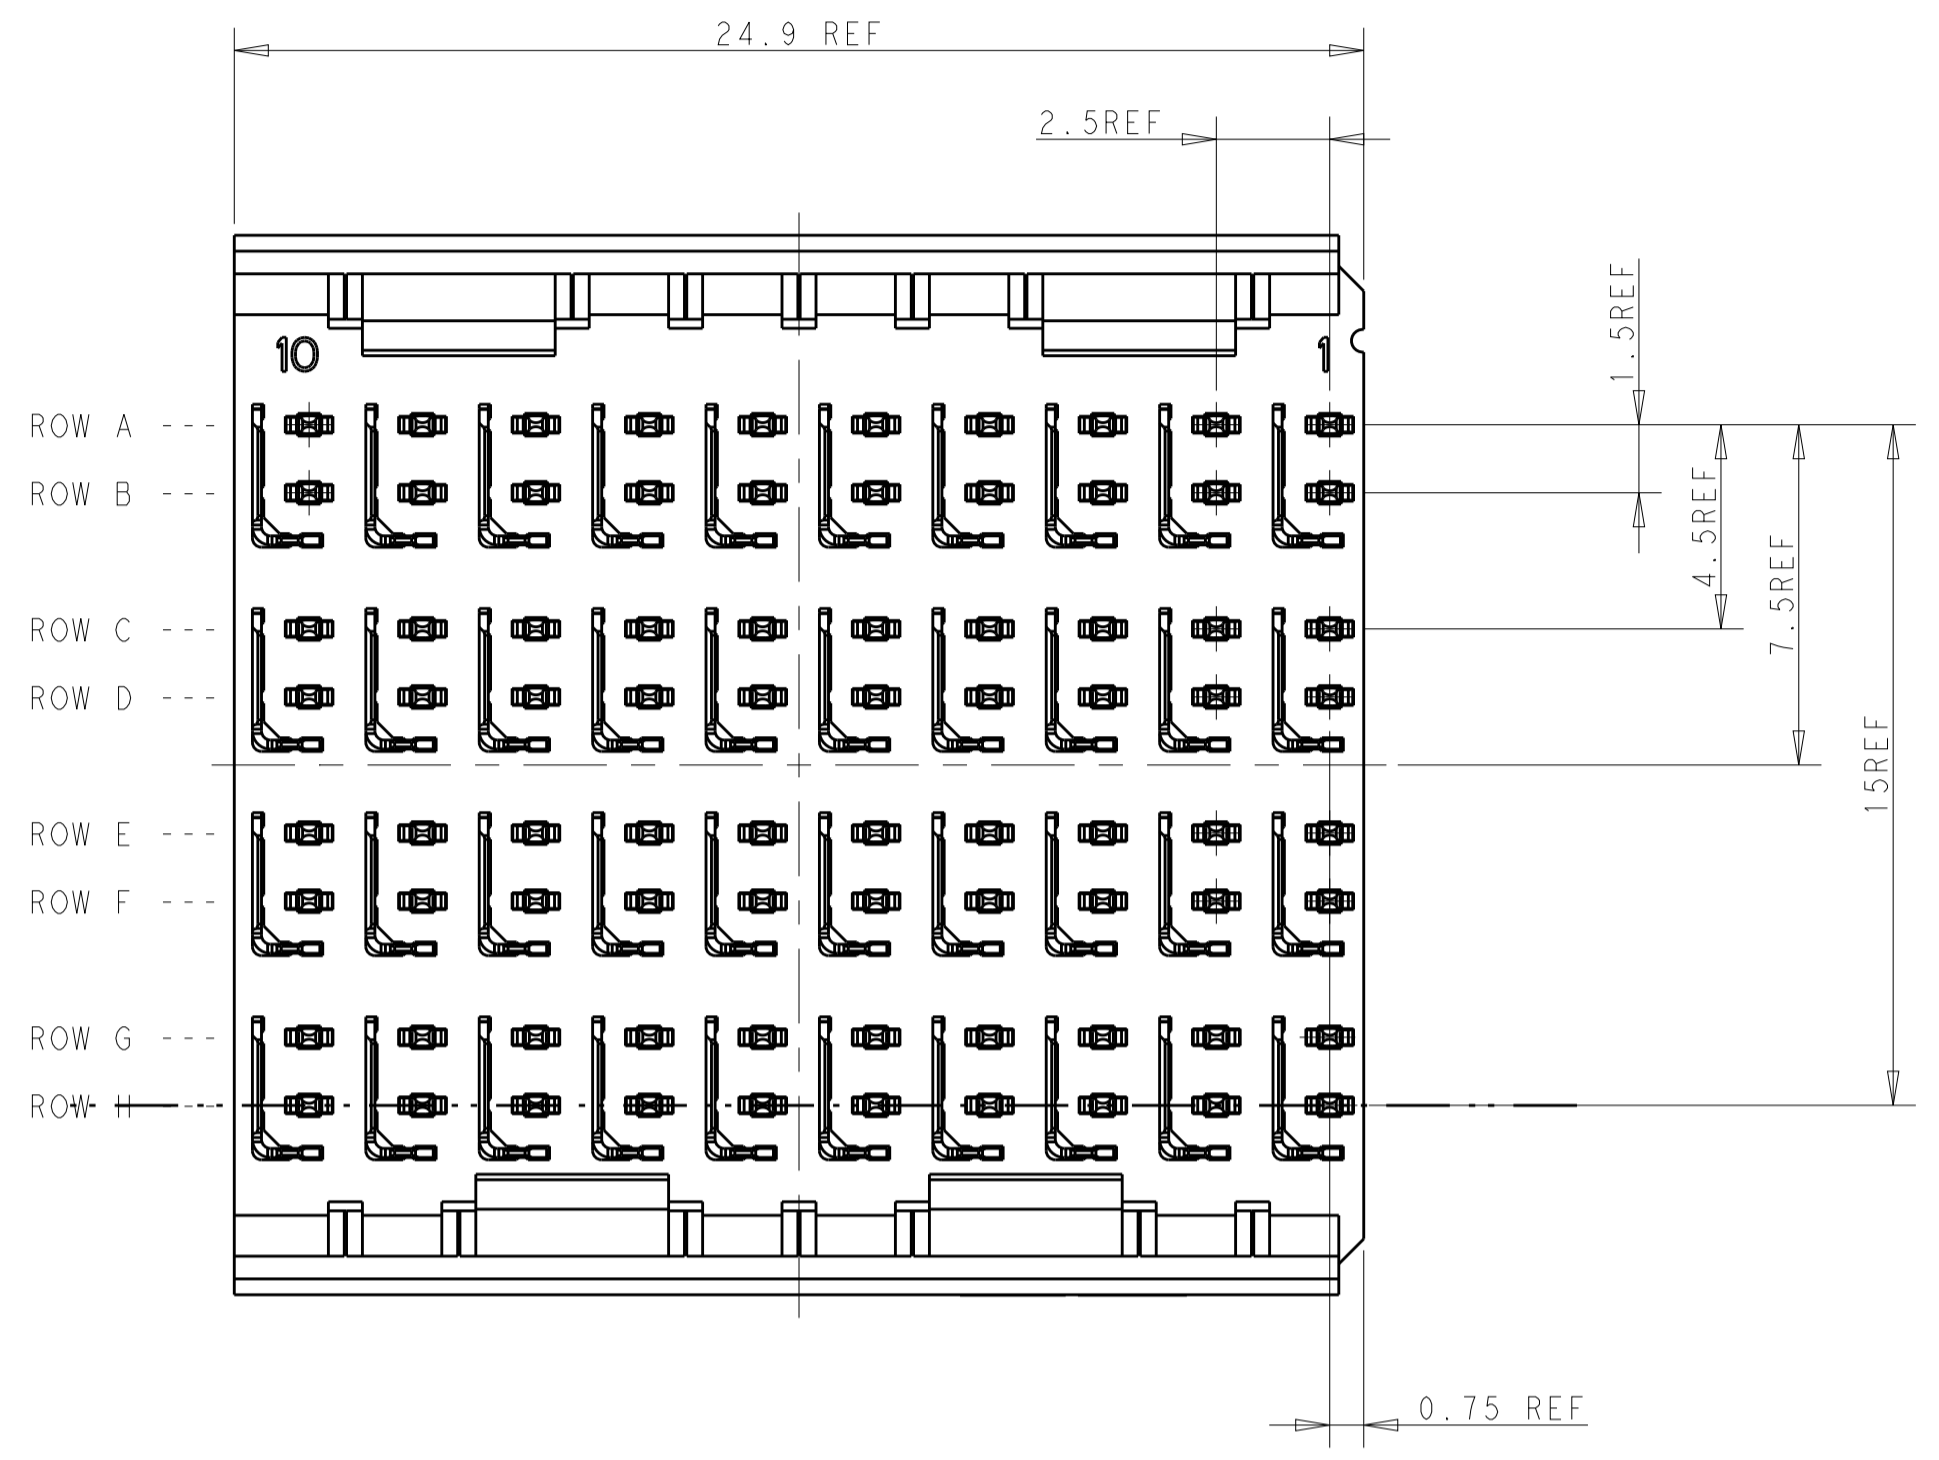

6 ϕ 0.46 REF
 ϕ 0.05 X Y
 ALL PLATED HOLES.

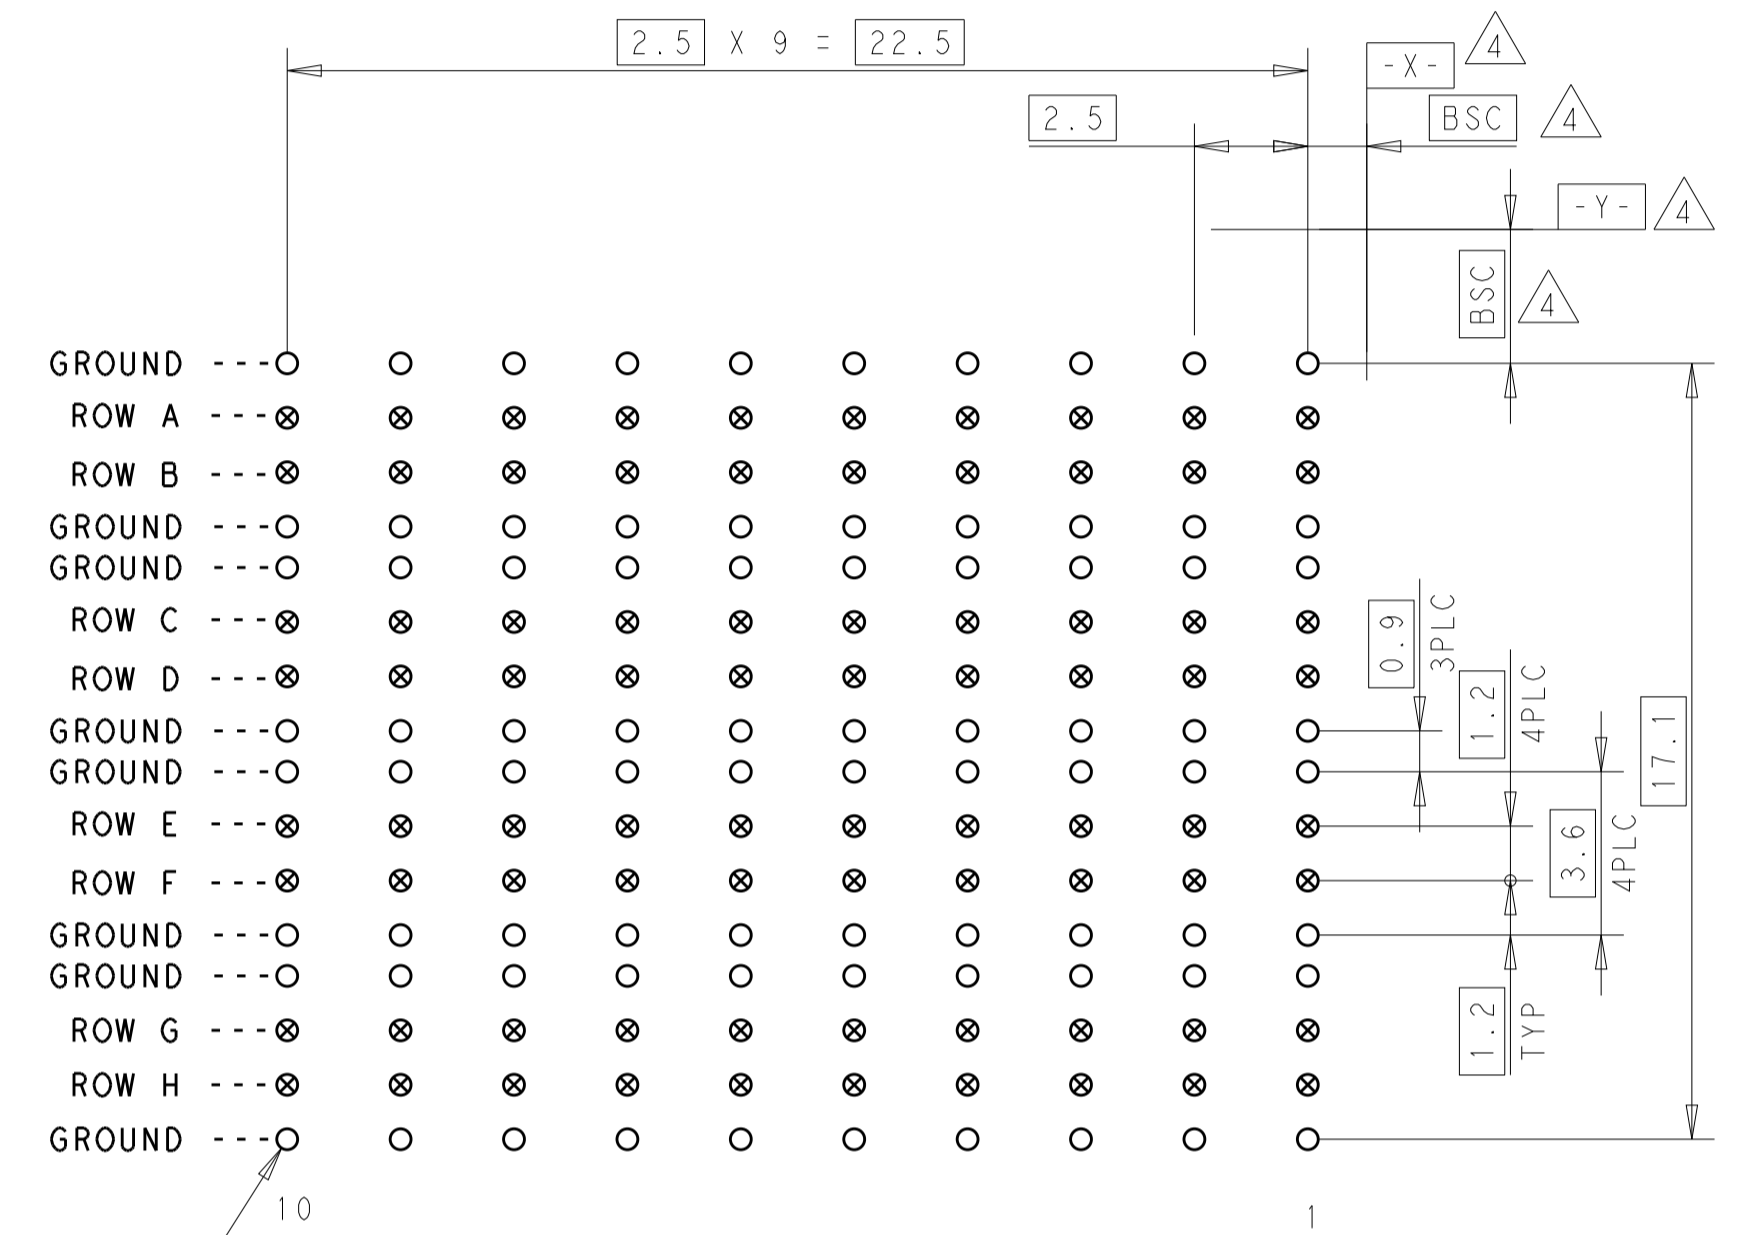

RECOMMENDED PCB LAYOUT
 VIEW FROM COMPONENT SIDE
 SCALE 6:1

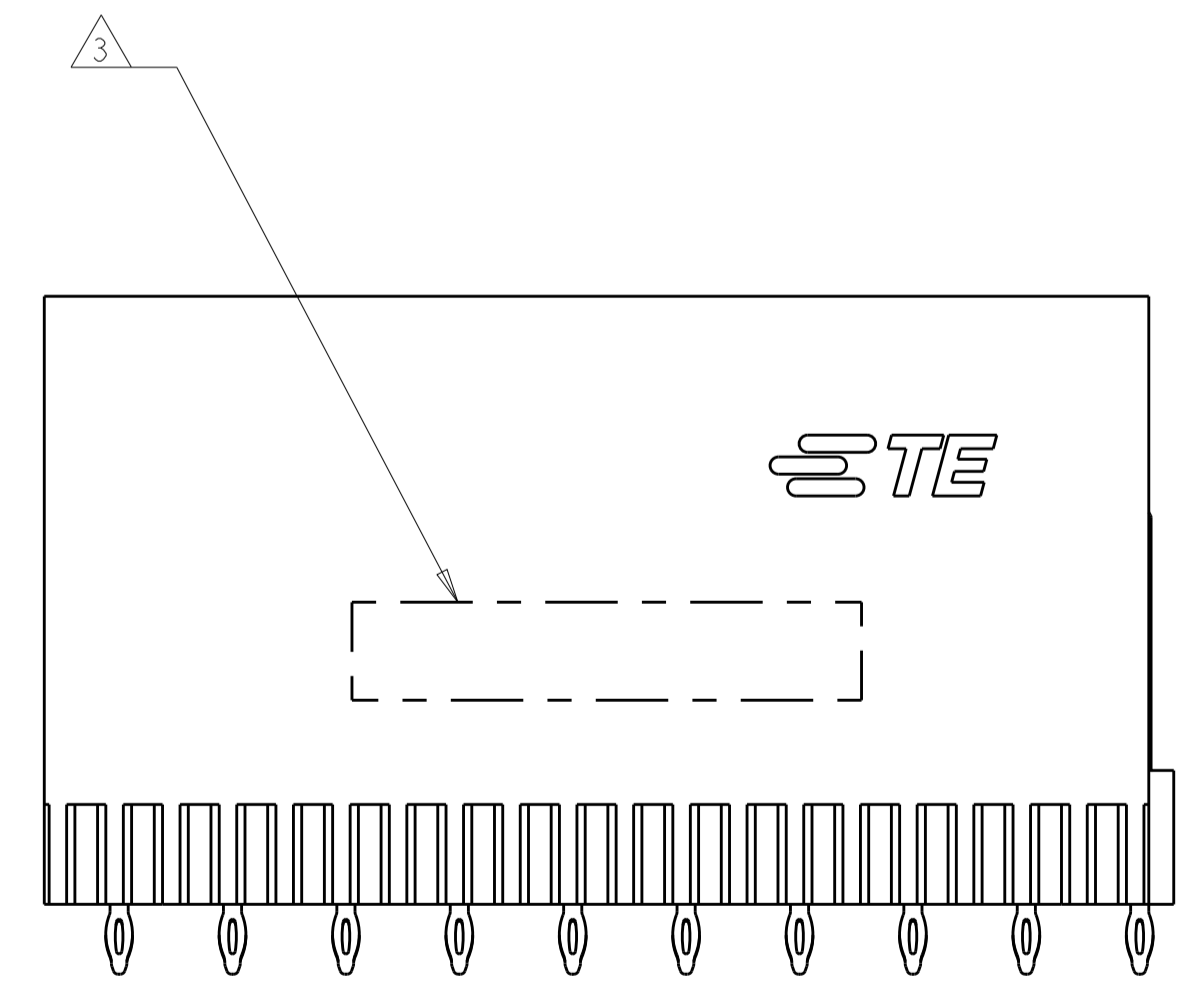

- 1 MATERIAL:
CONTACT AND SHIELD: PHOSPHOR BRONZE
HOUSING: THERMALPLASTIC, UL 94V-0
- 2 FINISH: SIGNAL AND GROUND CONTACTS:
MATING AREA: MEETS THE PERFORMANCE REQUIREMENTS OF
PRODUCT SPECIFICATION 108-2055-1; BASED ON TELCORDIA
GR-1217-CORE, APPLICATIONS IN UNCONTROLLED ENVIRONMENTS
COMPLIANT PIN AREA: 0.5 μ m MIN MATTE
TIN OVER BASE PLATING
- 3 CONNECTOR MARKED WITH PART NUMBER AND DATE CODE
- 4 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 5 FINISH: SIGNAL AND GROUND CONTACTS:
0.76 μ m MIN. GOLD PLATING
COMPLIANT PIN AREA: 0.5 μ m MIN MATTE TIN OVER BASE PLATING
- 6 CONTACT AREA LUBRICATED WITH BELLCORE
APPROVED LUBRICANT. TECHNICAL REFERENCE:
GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- 7 RECOMMENDED THRU HOLE DIAMETER AND PLATING THICKNESSES PLEASE
REFER TO APPLICATION SPEC 114-13059

5	2170330-2
2	2170330-1
FINISH	PART NO.

DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: mm 0.000 ±0.20 0.001 ±0.20 0.002 ±0.20 0.005 ±0.20 0.010 ±0.20 0.020 ±0.20 0.050 ±0.20 0.100 ±0.20 0.200 ±0.20 0.500 ±0.20 1.000 ±0.20 2.000 ±0.20 5.000 ±0.20 10.000 ±0.20 20.000 ±0.20 50.000 ±0.20 100.000 ±0.20 200.000 ±0.20 500.000 ±0.20 1000.000 ±0.20 FINISH 1 2		DWN DAVID SHEN 23APR2012 CHK SANDERS YAN 23APR2012 APVD ALEY CAI 23APR2012 PRODUCT SPEC 108-2055-1 APPLICATION SPEC 114-13059 WEIGHT CUSTOMER DRAWING		NAME ASSEMBLY DRAWING 4 PAIR, 10 COLUMN, VERTICAL HM ZD+, HEADER SIZE A1 CAGE CODE DRAWING NO. C=2170330 SCALE 6:1 SHEET 1 OF 1 REV D	
-----------------------	--	---	--	---	--	---	--

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)