


Customer Product Print

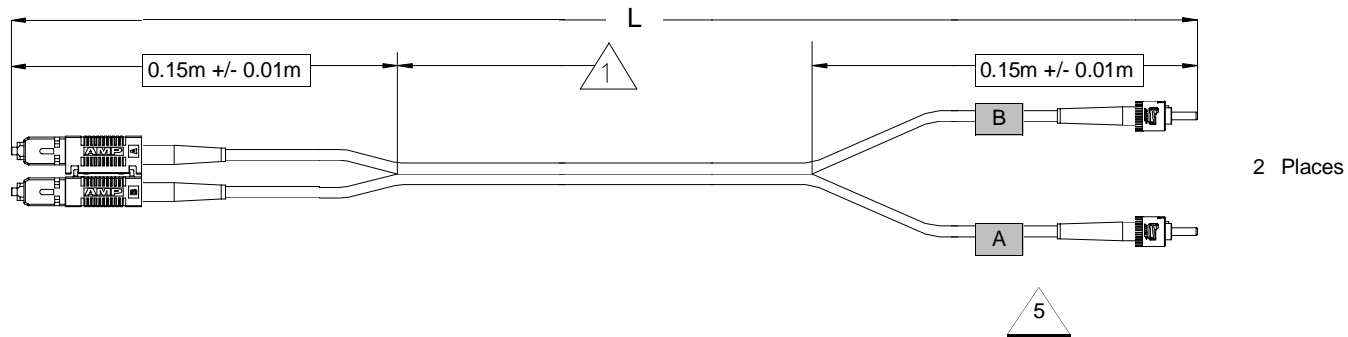

Connector Information

Connector(s): SC-Duplex
 Mode: MM Ferrule Material: Ceramic
 Male/Female: N/A Housing Color: Beige

Boot Information

| | |
|----------------------------|-------------|
| SC, FC Straight 3.0mm Boot | |
| Straight | Beige/Beige |

Cable Information

Number of Fibers: 2
 Mode: MM
 Jacket Diameter: 3 mm
 Jacket Color: Orange
 FiberType: 62.5/125
 Flame Rating: OFNR (Riser)

FiberPath

A - ████████ B Blue
 B - ████████ A Black

Connector Information

Connector(s): ST
 Mode: MM Ferrule Material: Ceramic
 Male/Female: N/A Housing Color: N/A

Boot Information

| | |
|-----------------|------------|
| ST Short 3.0 mm | |
| Straight | Black/Blue |

Notes:

- 1 Label dimension "T" meters +/- 0.030 meters from reference. See labeling requirements table for "T" dimension(s).
- 2 Install dust caps (not shown on print).
- 3 Note not used on this print
- 4 Note not used on this print
- 5 Leg labels to be flagged 0.01m +/- 0.005m from strain relief boot.

| | | |
|---|--|--|
| This is a controlled document | Scale: NTS | Drawing Number: 504958 Revision: K |
| This information is confidential and proprietary to Tyco Electronics Corporation and its worldwide subsidiaries and affiliates. It may not be disclosed to anyone other than Tyco Electronics personnel without written authorization from Tyco Electronics Corporation, Harrisburg, PA USA | Tyco Electronics Harrisburg, PA 17105-3608 USA | FO C/A - 2 fiber, 3mm, 62.5/125, MM, OFNR (Riser), SC-Duplex to ST |
| | | Sheet 1 of 3 |

Customer Product Print

1

Labeling Requirements:

| Dash # | Label Data Field A | Label Data Field B | Label Data Field C | Label Data Field D | Label Placement | "T" Dim. (meters) |
|--------|--------------------------------------|--------------------|--------------------|--------------------|-----------------|-------------------|
| All | Trace No. Bar Coded & Human Readable | Tyco Logo | Tyco P/N | Not Used | Flag On Cable | 0.110 |

Lengths and Loss:

| Dash # | "L" Dimension (meters) | SC-Duplex, Standard, Beige | ST, Standard |
|--------|------------------------|-----------------------------|-----------------------------|
| 1 | 0.950 - 1.050 | IL 0.50 (dB) BR N/A (dB) | IL 0.50 (dB) BR N/A (dB) |
| 2 | 1.950 - 2.050 | IL 0.50 (dB) BR N/A (dB) | IL 0.50 (dB) BR N/A (dB) |
| 3 | 2.950 - 3.050 | IL 0.50 (dB) BR N/A (dB) | IL 0.50 (dB) BR N/A (dB) |
| 4 | 4.950 - 5.050 | IL 0.51 (dB) BR N/A (dB) | IL 0.51 (dB) BR N/A (dB) |
| 5 | 9.900 - 10.100 | IL 0.52 (dB) BR N/A (dB) | IL 0.52 (dB) BR N/A (dB) |
| 6 | 14.850 - 15.150 | IL 0.52 (dB) BR N/A (dB) | IL 0.52 (dB) BR N/A (dB) |
| 7 | 19.800 - 20.200 | IL 0.53 (dB) BR N/A (dB) | IL 0.53 (dB) BR N/A (dB) |
| 8 | 5.940 - 6.060 | IL 0.51 (dB) BR N/A (dB) | IL 0.51 (dB) BR N/A (dB) |
| 9 | 6.930 - 7.070 | IL 0.51 (dB) BR N/A (dB) | IL 0.51 (dB) BR N/A (dB) |
| 10 | 7.920 - 8.080 | IL 0.51 (dB) BR N/A (dB) | IL 0.51 (dB) BR N/A (dB) |
| 11 | 10.890 - 11.110 | IL 0.52 (dB) BR N/A (dB) | IL 0.52 (dB) BR N/A (dB) |
| 12 | 12.870 - 13.130 | IL 0.52 (dB) BR N/A (dB) | IL 0.52 (dB) BR N/A (dB) |
| 13 | 2.390 - 2.490 | IL 0.50 (dB) BR N/A (dB) | IL 0.50 (dB) BR N/A (dB) |
| 14 | 0.290 - 0.370 | IL 0.50 (dB) BR N/A (dB) | IL 0.50 (dB) BR N/A (dB) |

| | | |
|---|--|---|
| This is a controlled document | Scale: NTS | Drawing Number: 504958 Revision: K |
| This information is confidential and proprietary to Tyco Electronics Corporation and its worldwide subsidiaries and affiliates. It may not be disclosed to anyone other than Tyco Electronics personnel without written authorization from Tyco Electronics Corporation, Harrisburg, PA USA | Tyco Electronics Harrisburg, PA 17105-3608 USA | FO C/A - 2 fiber, 3mm, 62.5/125, MM, OFNR (Riser), SC-Duplex to ST |
| | | Sheet 2 of 3 |

Customer Product Print

| | | | |
|----|-----------------|-----------------------------|-----------------------------|
| 25 | 24.750 - 25.250 | IL 0.54 (dB) BR N/A (dB) | IL 0.54 (dB) BR N/A (dB) |
| 30 | 29.700 - 30.300 | IL 0.55 (dB) BR N/A (dB) | IL 0.55 (dB) BR N/A (dB) |

This is a controlled document

This information is confidential and proprietary to Tyco Electronics Corporation and its worldwide subsidiaries and affiliates. It may not be disclosed to anyone other than Tyco Electronics personnel without written authorization from Tyco Electronics Corporation, Harrisburg, PA USA

Scale: NTS

Tyco Electronics
Harrisburg, PA
17105-3608 USA

Drawing Number: **504958** Revision: **K**

FO C/A - 2 fiber, 3mm, 62.5/125, MM, OFNR
(Riser), SC-Duplex to ST

Sheet 3 of 3

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)