
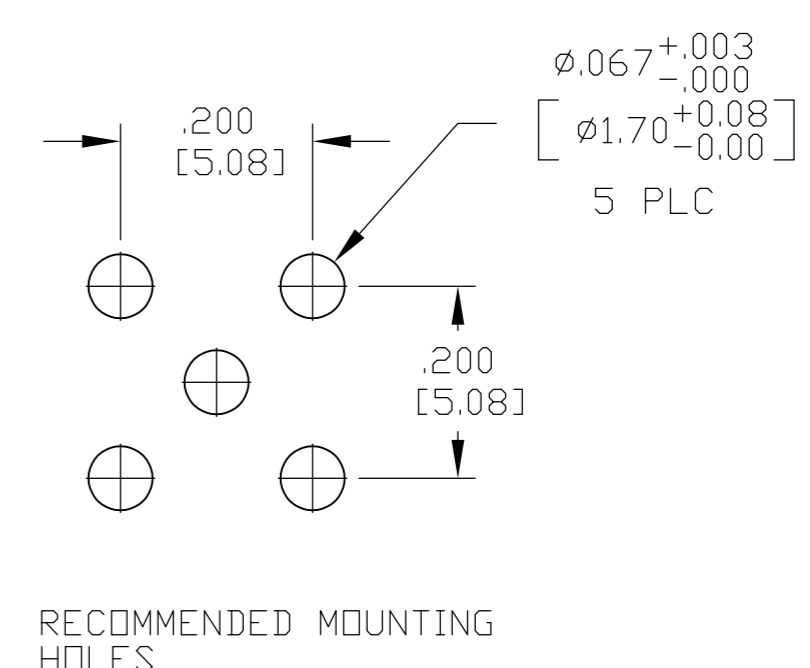


THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION	
© COPYRIGHT - By -		ALL RIGHTS RESERVED.	
HOUSING CAP	STAINLESS STEEL PER ASTM-A484 AND ASTM-A582, TYPE 303	.000035-.000065 GOLD PL PER MIL-G-45204 OVER .000145-.000275 NICKEL PL PER AMS-QQ-N-290	
DIELECTRIC	TFE FLUOROCARBON PER ASTM-D-1710	N/A	
CENTER CONTACT CONTACT EXT.	BERYLLIUM COPPER PER ASTM-B-196, ALLOY C17300, CONDITION H	.000050-.000100 GOLD PL PER MIL-G-45204 OVER .000050 MIN NICKEL PL PER AMS-QQ-N-290	
O-RING	FLUOROSILICONE PER MIL-R-25988, COLOR: BLUE	N/A	
COMPONENT	MATERIAL	FINISH	

LOC		DIST		REVISIONS			
P	LTR	DESCRIPTION		DATE	DWN	APVD	
	D	REV PER ECO-12-011433		25JUN12	PY	WM	

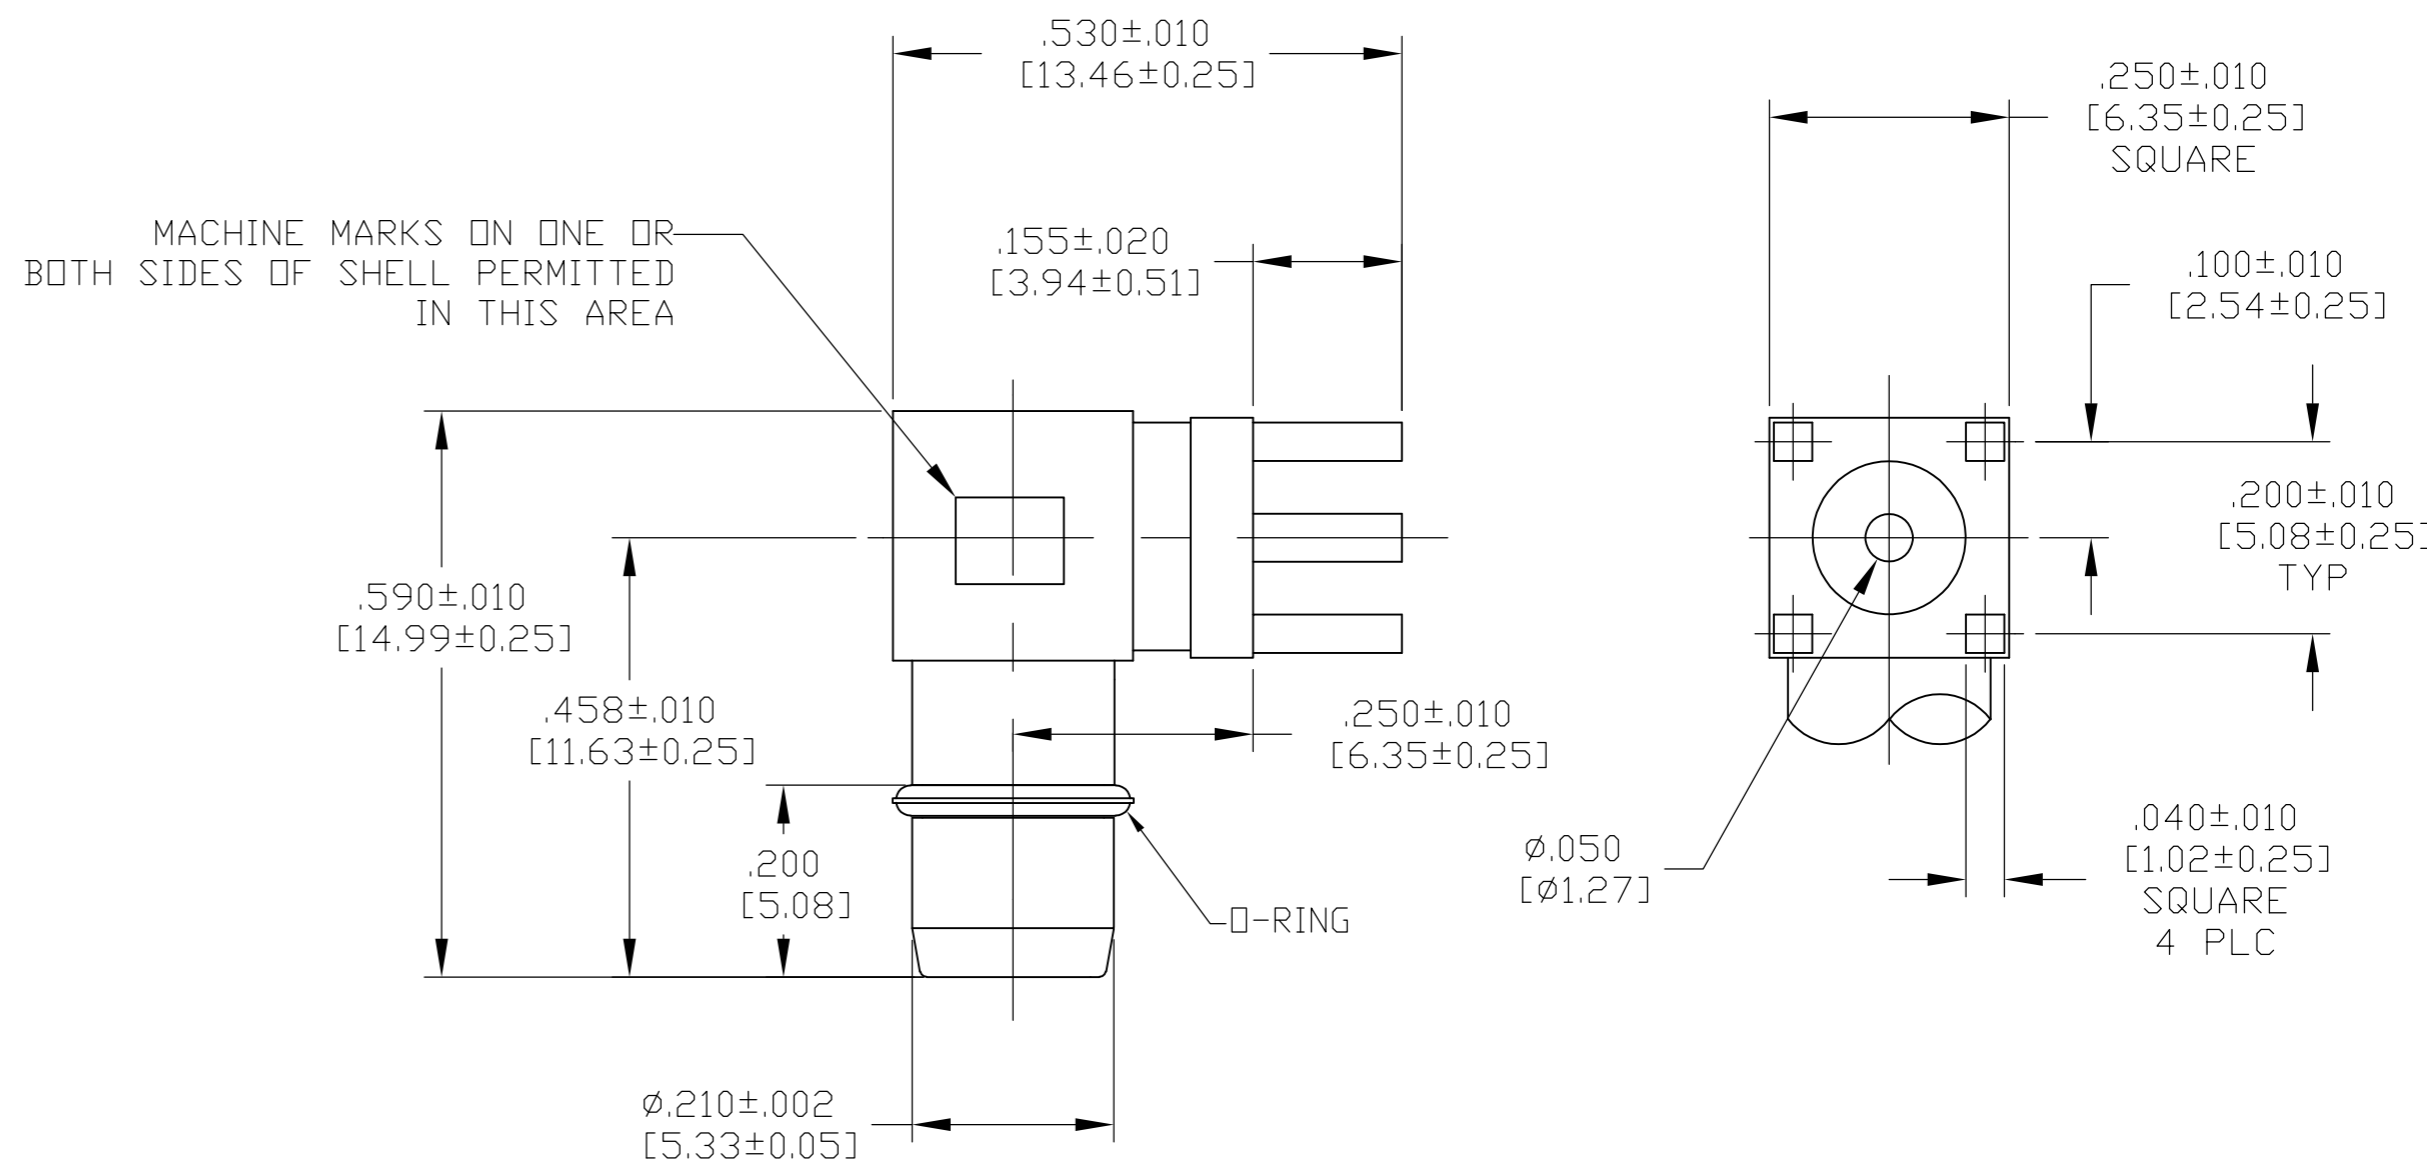

ELECTRICAL	MECHANICAL	ENVIRONMENTAL
Nominal Impedance (Ohms) <u>50</u>	Interface Dimensions: <u>MIL-STD-348A, FIG 321-1</u>	TEMPERATURE RATING <u>-55°C TO +125°C</u>
Frequency Range (GHz) DC to <u>22</u>	Recommended Mating Torque <u>N/A</u>	Vibration MIL-STD-202, Method 204, Condition D
Volt Rating (VRMS MAX) @ Sea Level <u>335</u>	Mating Characteristics: Insertion (MAX Lbs) <u>3.0</u>	Shock MIL-STD-202, Method 213, Condition I
VSWR <u>N/A</u>	Withdrawal (MIN Oz) <u>1.0</u>	Thermal Shock MIL-STD-202, Method 107, Condition B Except HIGH TEMP SHALL BE +125°C
Insertion Loss (dB MAX) <u>N/A</u>	Force to Engage (In-Lbs MAX) <u>3.0</u>	Moisture Resistance MIL-STD-202, Method 106
RF Leakage (dB MIN) <u>N/A</u>	Force to Disengage (In-Lbs MAX) <u>1.5</u>	Corrosion - MIL-STD-202, Method 101, Condition B, 5% salt spray
Corona, 70,000 Ft (VRMS MIN) <u>250</u>	Center Contact Captivation: Axial (Lbs) <u>6.0</u>	
Dielectric Withstanding Voltage (VRMS MIN) @ Sea Level <u>1,000</u>	Radial (In-Oz) <u>4.0</u>	
Contact Resistance (Milliohms MAX): Center Contact <u>3.0</u>	Cable Retention: Axial Force (Lbs) <u>N/A</u>	
Outer Contact <u>2.0</u>	Torque (In-Oz) <u>N/A</u>	
Cable to Housing <u>N/A</u>	Weight (Grams) <u>TBD</u>	
RF High Potential @ Sea Level (VRMS MIN @ 5 MHz) <u>670</u>		
I.R.(Megohms MIN) <u>5,000</u>		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN P. YEAGER 11FEB2009	TE TE Connectivity	
DIMENSIONS: INCHES		CHK W. MOYER 12FEB09		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD W. MOYER 12FEB09	NAME	
0 PLC ± -	1 PLC ± -	PRODUCT SPEC	OSP PRINTED WIRING BOARD RIGHT ANGLE PLUG RECEPTACLE	
2 PLC ± -	3 PLC ± .005	APPLICATION SPEC	SIZE A2	CAGE CODE 00779
4 PLC ± -	ANGLES ± 1°	WEIGHT -	DRAWING NO C=1059691	RESTRICTED TO -
MATERIAL -	FINISH -	CUSTOMER DRAWING	SCALE 5:1	SHEET 1 of 1
			REV D	PART NUMBER 1059691-1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)