

Type RL73 Series

Key Features

Up to 2W @ 70°C

8 chip sizes

Ideal for current detection

Terminal finish –
electroplated 100% matte
Sn

Applications


Communications

Audio

Automotive

Low voltage power
supplies

Power management
applications

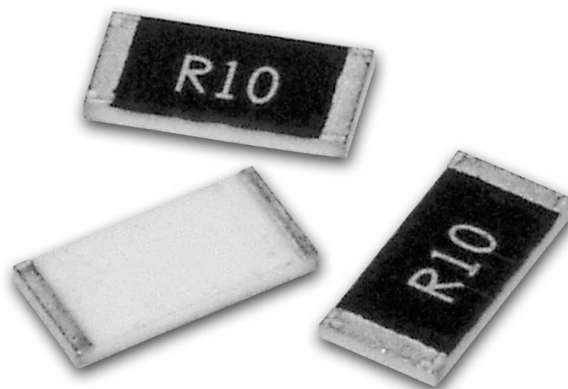

TE Connectivity are pleased to offer this thick film chip resistor for current sensing positions. It has a special metal glaze resistive element and a nickel barrier layer beneath the solder to prolong terminal life. Following the developments by semiconductor manufacturers in the production of a range of IC's for battery charge management and low voltage power supplies, the RL73 Series satisfies the demand for a low ohmic shunt resistor to act as a current sensor.

Electrical Characteristics Standard Power

| Size | Size | TCR (PPM/°C) | Power rating @ 70°C | Resistance Range (Ω) | Max Operating Current | Packaging | | | |
|---------|------|-----------------|---------------------------|-------------------------|-----------------------------|-----------|------|----|-------|
| | | | | | | TDF | TD | TE | Tape |
| RL73X1H | 0201 | ±1000 | 0.05W | R10 – R13 | 0.70A | 1000 | 5000 | | Paper |
| RL73V1H | | ±600 | | R15 – R47 | | | | | |
| RL73N1H | | ±300 | | R51 – R91 | | | | | |
| RL73M1E | 0402 | ±400 | 0.0625W | R05 – R091 | 1.11A | 1000 | 5000 | | Paper |
| RL73N1E | | ±300 | | R10 – R47 | | | | | |
| RL73K1E | | ±200 | | R51 – R91 | | | | | |
| RL73V1J | 0603 | ±600 | 0.1W | R020 – R047 | 2.23A | 1000 | 5000 | | Paper |
| RL73M1J | | ±400 | | R051 – R091 | | | | | |
| RL73N1J | | ±300 | | R10 – R50 | | | | | |
| RL73K1J | | ±200 | | R51 – R91 | | | | | |
| RL73V2A | 0805 | ±600 | 0.125W | R020 – R047 | 2.50A | 1000 | 5000 | | Paper |
| RL73M2A | | ±400 | | R051 – R10 | | | | | |
| RL73N2A | | ±300 | | R11 – R18 | | | | | |
| RL73K2A | | ±200 | | R20 – R91 | | | | | |
| RL73H2A | | ±100 | | R10 – R91 | 1.11A | | | | |

Electrical Characteristics Standard Power (continued)

| Size | Size | TCR (PPM/°C) | Power rating @ 70°C | Resistance Range (Ω) | Max Operating Current | Packaging | | | |
|---------|------|--------------|---------------------|----------------------|-----------------------|-----------|------|------|------------------|
| | | | | | | TDF | TD | TE | Tape |
| RL73V2B | 1206 | ±600 | 0.25W | R010 – R020 | 5.00A | 1000 | 5000 | | Paper |
| RL73M2B | | ±400 | | R022 – R047 | | | | | |
| RL73N2B | | ±300 | | R051 – R091 | | | | | |
| RL73K2B | | ±200 | | R10 – R91 | | | | | |
| RL73H2B | | ±100 | | R10 – R91 | | | | | |
| RL73V2E | 1210 | ±600 | 0.5W | R010 – R020 | 7.07A | 1000 | 5000 | | Paper |
| RL73M2E | | ±400 | | R022 – R047 | | | | | |
| RL73N2E | | ±300 | | R051 – R091 | | | | | |
| RL73K2E | | ±200 | | R10 – R91 | | | | | |
| RL73H2E | | ±100 | | R075 – R91 | | | | | |
| RL73V2H | 2010 | ±600 | 0.75W | R010 – R020 | 8.66A | | | 4000 | Embossed Plastic |
| RL73M2H | | ±400 | | R022 – R047 | | | | | |
| RL73N2H | | ±300 | | R051 – R091 | | | | | |
| RL73K2H | | ±200 | | R10 – R91 | | | | | |
| RL73H2H | | ±100 | | R050 – R91 | | | | | |
| RL73V3A | 2512 | ±600 | 1W | R010 – R020 | 10.0A | | | 4000 | Embossed Plastic |
| RL73M3A | | ±400 | | R022 – R047 | | | | | |
| RL73N3A | | ±300 | | R051 – R091 | | | | | |
| RL73K3A | | ±200 | | R10 – R91 | | | | | |
| RL73H3A | | ±100 | | R020 – R91 | | | | | |

Characteristics Electrical – High Power Version - RLP73

| Type | Size | TCR (PPM/°C) | Power rating | Resistance Range | Max. Operating current | Packaging | | | |
|----------|------|--------------|--------------|------------------|------------------------|-----------|------|----|-------|
| | | | | | | TDF | TD | TE | Tape |
| RLP73M1E | 0402 | ±400 | 0.125W | R051 – R091 | 1.56A | 1000 | 5000 | | Paper |
| RLP73N1E | | ±300 | | R10 – R47 | | | | | |
| RLP73K1E | | ±200 | | R51 – R91 | | | | | |
| RLP73M1J | 0603 | ±400 | 0.125W | R051 – R091 | 1.98A | 1000 | 5000 | | Paper |
| RLP73N1J | | ±300 | | R10 – R47 | | | | | |
| RLP73K1J | | ±200 | | R51 – R91 | | | | | |
| RLP73M2A | 0805 | ±400 | 0.25W | R051 – R091 | 2.21A | 1000 | 5000 | | Paper |
| RLP73N2A | | ±300 | | R10 – R47 | | | | | |
| RLP73K2A | | ±200 | | R51 – R91 | | | | | |
| RLP73V2B | 1206 | ±600 | 0.5W | R010 – R020 | 7.07 | 1000 | 5000 | | Paper |
| RLP73M2B | | ±400 | | R022 – R047 | | | | | |
| RLP73N2B | | ±300 | | R051 – R091 | | | | | |
| RLP73K2B | | ±200 | | R10 – R91 | | | | | |

Characteristics Electrical – High Power Version - RLP73 (continued)


| Type | Size | TCR (PPM/°C) | Power rating | Resistance Range | Max. Operating current | Packaging | | | |
|----------|------|-----------------|-----------------|---------------------|------------------------------|-----------|------|------|---------------------|
| | | | | | | TDF | TD | TE | Tape |
| RLP73V2E | 1210 | ±600 | 0.75W | R010 – R020 | 8.66A | 1000 | 5000 | | Paper |
| RLP73M2E | | ±400 | | R022 – R047 | | | | | |
| RLP73N2E | | ±300 | | R051 – R091 | | | | | |
| RLP73K2E | | ±200 | | R10 – R91 | | | | | |
| RLP73V2H | 2010 | ±600 | 1W | R010 – R020 | 10A | 1000 | | 4000 | Embossed Plastic |
| RLP73M2H | | ±400 | | R022 – R047 | | | | | |
| RLP73N2H | | ±300 | | R051 – R091 | | | | | |
| RLP73K2H | | ±200 | | R10 – R91 | | | | | |
| RLP73V3A | 2512 | ±600 | 2W | R010 – R020 | 14.1A | 1000 | | 4000 | Embossed Plastic |
| RLP73M3A | | ±400 | | R022 – R047 | | | | | |
| RLP73N3A | | ±300 | | R051 – R091 | | | | | |
| RLP73K3A | | ±200 | | R10 – R91 | | | | | |

Operating Voltage= $\sqrt{P \cdot R}$; Overload Voltage= $2.5 \cdot \sqrt{P \cdot R}$; Operating Current= $\sqrt{P/R}$

Maximum operating temperature -55°C to +155°C

Storage Temperature 25±3°C; Humidity < 80%RH

Power Derating curve

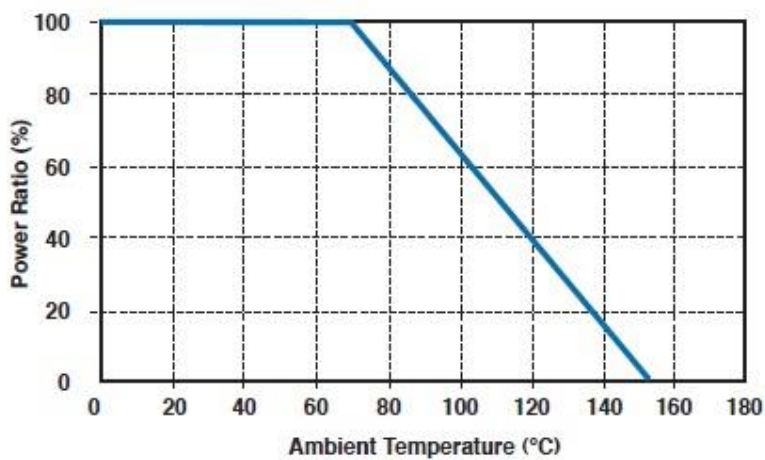

For resistors operated in ambient temperatures above 70°C, power rating must be derated in accordance with this curve.

Construction and dimensions




| | | |
|-------------------------|---------------------------|------------------------------|
| ① Alumina Substrate | ④ Edge Electrode (NiCr) | ⑦ Resistor Layer (Ag/Pd) |
| ② Bottom Electrode (Ag) | ⑤ Barrier Layer (Ni) | ⑧ Primary Overcoat (Glass) |
| ③ Top Electrode (Ag-Pd) | ⑥ External Electrode (Sn) | ⑨ Secondary Overcoat (Epoxy) |

| Type | Size | L (mm) | W (mm) | T (mm) | D1 (mm) | D2 (mm) | Weight (g) (1000 Pcs.) |
|--------------|--------------------------|-----------|-----------|-----------|-----------|-----------|---------------------------|
| RL73 | 0201 (1H) | 0.60±0.03 | 0.30±0.03 | 0.23±0.05 | 0.12±0.05 | 0.15±0.05 | 0.18 |
| RL73 / RLP73 | 0402 (1E) | 1.00±0.05 | 0.50±0.05 | 0.32±0.10 | 0.25±0.10 | 0.20±0.10 | 0.7 |
| RL73 / RLP73 | 0603 (1J) | 1.60±0.10 | 0.80±0.10 | 0.45±0.10 | 0.30±0.20 | 0.30±0.20 | 1.99 |
| RL73 / RLP73 | 0805 (2A) | 2.00±0.10 | 1.25±0.10 | 0.55±0.10 | 0.30±0.20 | 0.40±0.25 | 5.3 |
| RL73 / RLP73 | 1206 (2B) | 3.10±0.10 | 1.55±0.10 | 0.55±0.10 | 0.50±0.30 | 0.40±0.25 | 8.82 |
| RL73 / RLP73 | 1210 (2E) | 3.10±0.10 | 2.60±0.15 | 0.55±0.10 | 0.50±0.30 | 0.50±0.25 | 15.5 |
| RL73 / RLP73 | 2010 (2H) | 5.00±0.10 | 2.50±0.15 | 0.60±0.15 | 0.60±0.30 | 0.50±0.25 | 27.03 |
| RL73 | 2512 (3A) | 6.35±0.10 | 3.10±0.15 | 0.60±0.10 | 0.60±0.30 | 0.55±0.25 | 43.08 |
| RLP73 | 2512 (3A) (R010-R099) | 6.35±0.20 | 3.15±0.15 | 0.74±0.10 | 0.60±0.30 | 0.55±0.25 | 53.08 |
| RLP73 | 2512 (3A) (R10 -R91) | 6.35±0.20 | 3.15±0.15 | 0.74±0.10 | 0.60±0.30 | 2.10±0.10 | 53.08 |


Suggested PCB Layout Plan

| Type | A (mm) | B (mm) | C ±0.2mm |
|------------------|--------|--------|----------|
| 0201 | 0.25 | 0.30 | 0.40 |
| 0402 | 0.50 | 0.50 | 0.60 |
| 0603 | 0.80 | 1.00 | 0.90 |
| 0805 | 1.00 | 1.00 | 1.35 |
| 1206 | 2.00 | 1.15 | 1.70 |
| 1210 | 2.00 | 1.15 | 2.50 |
| 2010 | 3.60 | 1.40 | 2.50 |
| 2512 (1W) | 4.90 | 1.60 | 3.20 |
| 2512 (2W) ≤99mΩ | 4.90 | 1.60 | 3.20 |
| 2512 (2W) ≥100mΩ | 1.0 | 3.55 | 3.20 |

Solder Profile

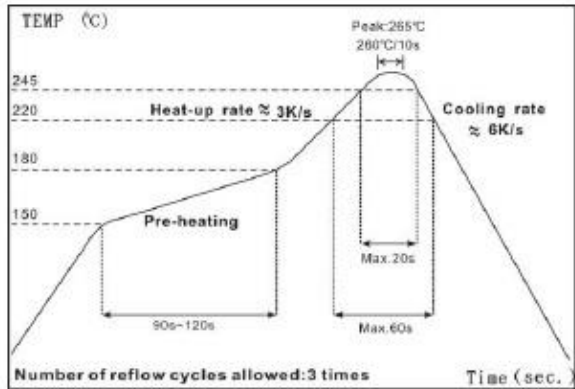

IR Reflow Soldering

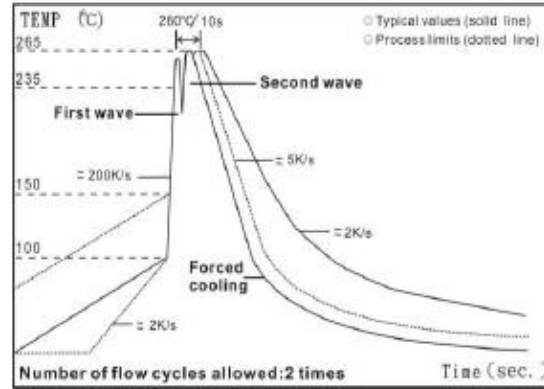

Wave Soldering (Flow Soldering)

- (1) Time of IR reflow soldering at maximum temperature point 260°C : 10s
- (2) Time of wave soldering at maximum temperature point 260°C : 10s
- (3) Time of soldering iron at maximum temperature point 410°C : 5s

Marking Specification

For 0201 and 0402 size resistor – No Marking


1% & 5% 0805/1206/1210/2010/2512 size Resistors – 4 Digit Marking.

Example:


| | | | | | |
|------------|------|------|------|-------|-------|
| Resistance | 47mΩ | 75mΩ | 15mΩ | 750mΩ | 820mΩ |
| Marking | R047 | R075 | R015 | R750 | R820 |

5% for 0603: 3 digits marking in E24


1% for 0603: 3 digits marking with under-line in E96 (if value appears in both E96 and E24 refer to E24)



3 digits marking for E24 or R value suffix is zero in E96: R10=100mΩ; R28=280mΩ



3 digits marking for E96: 243=243mΩ; 511=511mΩ



3 digit marking for E24 where value is less than 100mΩ and R value suffix is NOT 0; E.G. R047=47mΩ

Environmental Characteristics

| Item | Requirement | Test Method |
|---|--|--|
| Temperature Coefficient of Resistance (TCR) | As Spec. | JIS-C-5201-1 4.8 IEC-60115-1 4.8 -55°C ~+125°C, 25°C is the reference temperature |
| Short Time Overload | $\pm(0.5\%+0.05\Omega)$ | JIS C 5201-1 4.13 IEC 60115-1 4.13 RCWV*2.5 or Max. Overload Voltage whichever is lower for 5 seconds |
| | $\pm(1.0\%+0.05\Omega)$ For High power rating | |
| Insulation Resistance | $\geq 10G$ | JIS-C-5201-1 4.6 IEC-60115-1 4.6 Max. Overload Voltage for 1 minute |
| Endurance | $\pm(1.0\%+0.05\Omega)$ | JIS-C-5201-1 4.25 IEC-60115-1 4.25.1 70 \pm 2°C, RCWV for 1000 hrs with 1.5 hrs "ON" and 0.5 hr off |
| Damp Heat with Load | $\pm(0.5\%+0.05\Omega)$ | JIS-C-5201-1 4.24 IEC-60115-1 4.24 40 \pm 2°C, 90~95% R.H., RCWV for 1000 hrs with 1.5 hrs "ON" and 0.5 hr "OFF" |
| Dry Heat | $\pm(0.5\%+0.05\Omega)$ | JIS-C-5201-1 4.23 IEC-60115-1 4.23.2 at +155°C for 1000 hrs |
| Bending Strength | $\pm(1.0\%+0.05\Omega)$ | JIS-C-5201-1 4.33 IEC-60115-1 4.33 Bending once for 5 seconds with 3mm 2010, 2512 sizes: 2mm |
| Solderability | 95% min. coverage | JIS-C-5201-1 4.17 IEC-60115-1 4.17 245 \pm 5°C for 3 seconds |
| Resistance to Soldering Heat | $\pm(0.5\%+0.05\Omega)$ | S-C-5201-1 4.18 IEC-60115-1 4.18 260 \pm 5°C for 10 seconds |
| Voltage Proof | No breakdown or flashover | JIS-C-5201-1 4.7 IEC-60115-1 4.7 1.42 times Max. Operating Voltage for 1 minute |
| Leaching | Individual leaching area \leq 5% Total leaching area \leq 10% | JIS-C-5201-1 4.18 IEC-60068-2-58 8.2.1 260 \pm 5°C for 30 seconds |
| Rapid Change of Temperature | $\pm(0.5\%+0.05\Omega)$ | JIS-C-5201-1 4.19 IEC-60115-1 4.19 -55°C to +155°C, 5 cycles |

RCWV (Rated Continuous Working Voltage) = $\sqrt{P \cdot R}$ or Max. Operating Voltage whichever is lower.

Storage Temperature: 15~28°C; Humidity < 80%RH


Packaging

Packing Quantity and Reel Specification



| Size | $\varnothing A \pm 1.0$ | $\varnothing B \pm 1.0$ | $\varnothing C \pm 0.7$ | $W \pm 1.0$ | $T \pm 1.0$ | Paper Tape | Embossed Plastic Tape | |
|-----------|-------------------------|-------------------------|-------------------------|-------------|-------------|--------------|-----------------------|------|
| 0201 | 178.0 | 60.0 | 13.5 | 9.5 | 11.5 | 1000 / 10000 | N/A | |
| 0402 | | | | | | | | |
| 0603 | | | | | | | | |
| 0805 | | | | | | | | |
| 1206 | | | | 13.5 | 15.5 | N/A | | 4000 |
| 1210 | | | | | | | | |
| 2010 | | | | | | | | |
| 2512 | 2000 | | | | | | | |
| 2512 (2W) | | | | | | | | |

Paper tape Specification

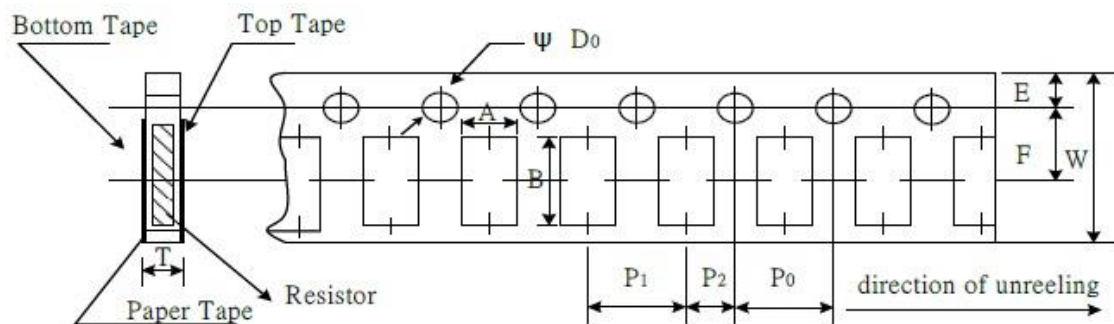

| Size | A | $B \pm 0.05$ | $W \pm 0.20$ | $E \pm 0.10$ | $F \pm 0.05$ | $P_0 \pm 0.10$ | $P_1 \pm 0.05$ | $P_2 \pm 0.05$ | $\varnothing D_0 \pm 0.1-0$ | T |
|------|-----------|--------------|--------------|--------------|--------------|----------------|----------------|----------------|-----------------------------|-----------|
| 0201 | 0.38±0.05 | 0.68±0.05 | 8.00 | 1.75 | 3.5 | 4.00 | 2.00 | 2.00 | 1.50 | 0.42±0.20 |
| 0402 | 0.65±0.10 | 1.15±0.10 | | | | | | | | 0.45±0.10 |
| 0603 | 1.10±0.10 | 1.90±0.10 | | | | | | | | 0.70±0.10 |
| 0805 | 1.60±0.10 | 2.40±0.20 | | | | | 4.00 | | | 0.85±0.10 |
| 1206 | 1.90±0.10 | 3.50±0.20 | | | | | | | | |
| 1210 | 2.90±0.10 | 3.50±0.20 | | | | | | | | |

Embossed Plastic Tape Specifications



| Type | A±0.10 | B±0.10 | W±0.30 | E±0.10 | F | P ₀ | P ₁ | P ₂ | ØD ₀ | T |
|-----------|--------|--------|--------|--------|----------|----------------|----------------|----------------|-----------------|-----------|
| 2010 | 2.80 | 5.50 | 12.0 | 1.75 | 5.5±0.05 | 4.00±0.05 | 4.00±0.10 | 2.00±0.05 | 1.50±0.10 | 1.00±0.20 |
| 2512 | 3.50 | 6.70 | | | | | | | | |
| 2512 (2W) | 3.38 | 6.68 | | | 5.5±0.10 | 4.00±0.10 | | | | |

How To Order

| RL73 | H | 2A | R10 | F | TD |
|--|---|--|----------------------------------|--------------------|---|
| Common Part | TCR | Size | Value | Tolerance | Packaging |
| RL73 – Current Sense Resistor – Standard Power | X -1000PPM V - 600PPM N - 300PPM H - 100PPM | 1H -0201 1E -0402 1J -0603 2A -0805 | 0.1 Ohm (100milliOhm) R10 | F - ±1% J - ±5% | TDF -1000 REEL TDG – 2000 REEL (2512 2W only) TE - 4000 REEL (2010,2512 only) TD -5000 REEL (0603~1210) TD- 10000 REEL (0201,0402) See above for applicability |
| RLP73 – Current Sense Resistor – High Power | K - 200PPM M - 400PPM See above for applicability | 2B -1206 2E -1210 2H -2010 3A -2512 | 0.91 Ohm (910milliOhm) R91 | | |

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)