
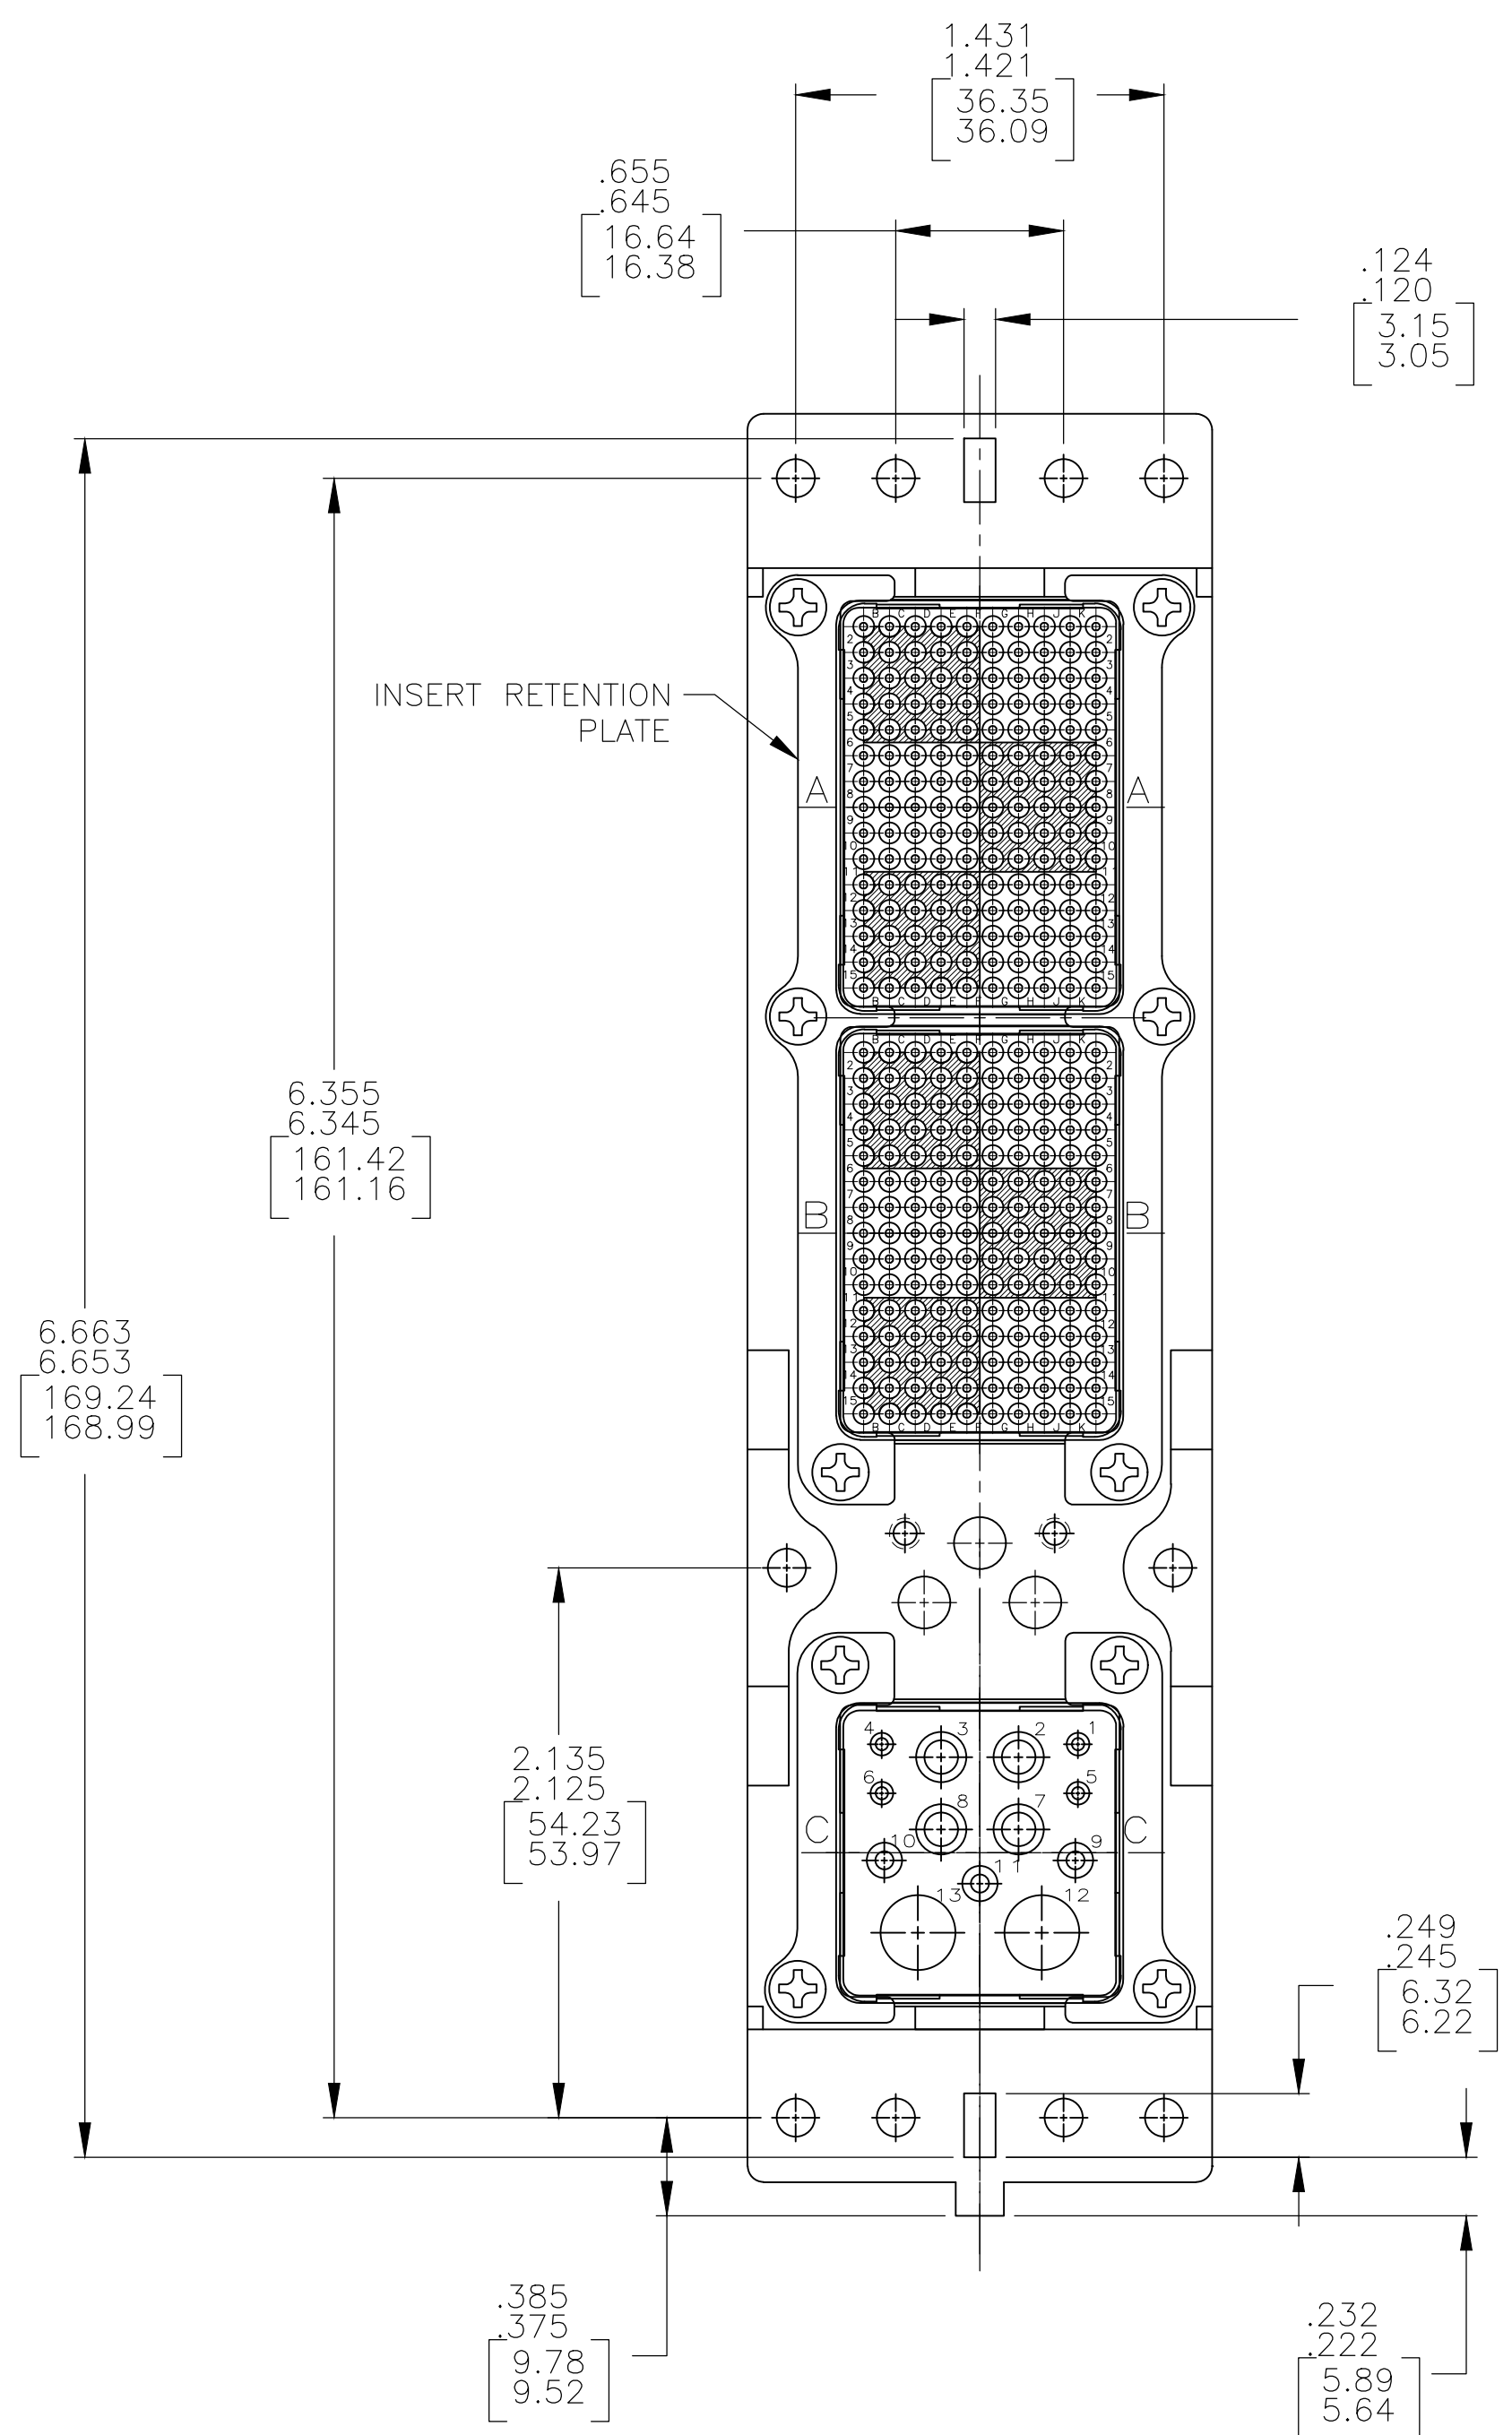
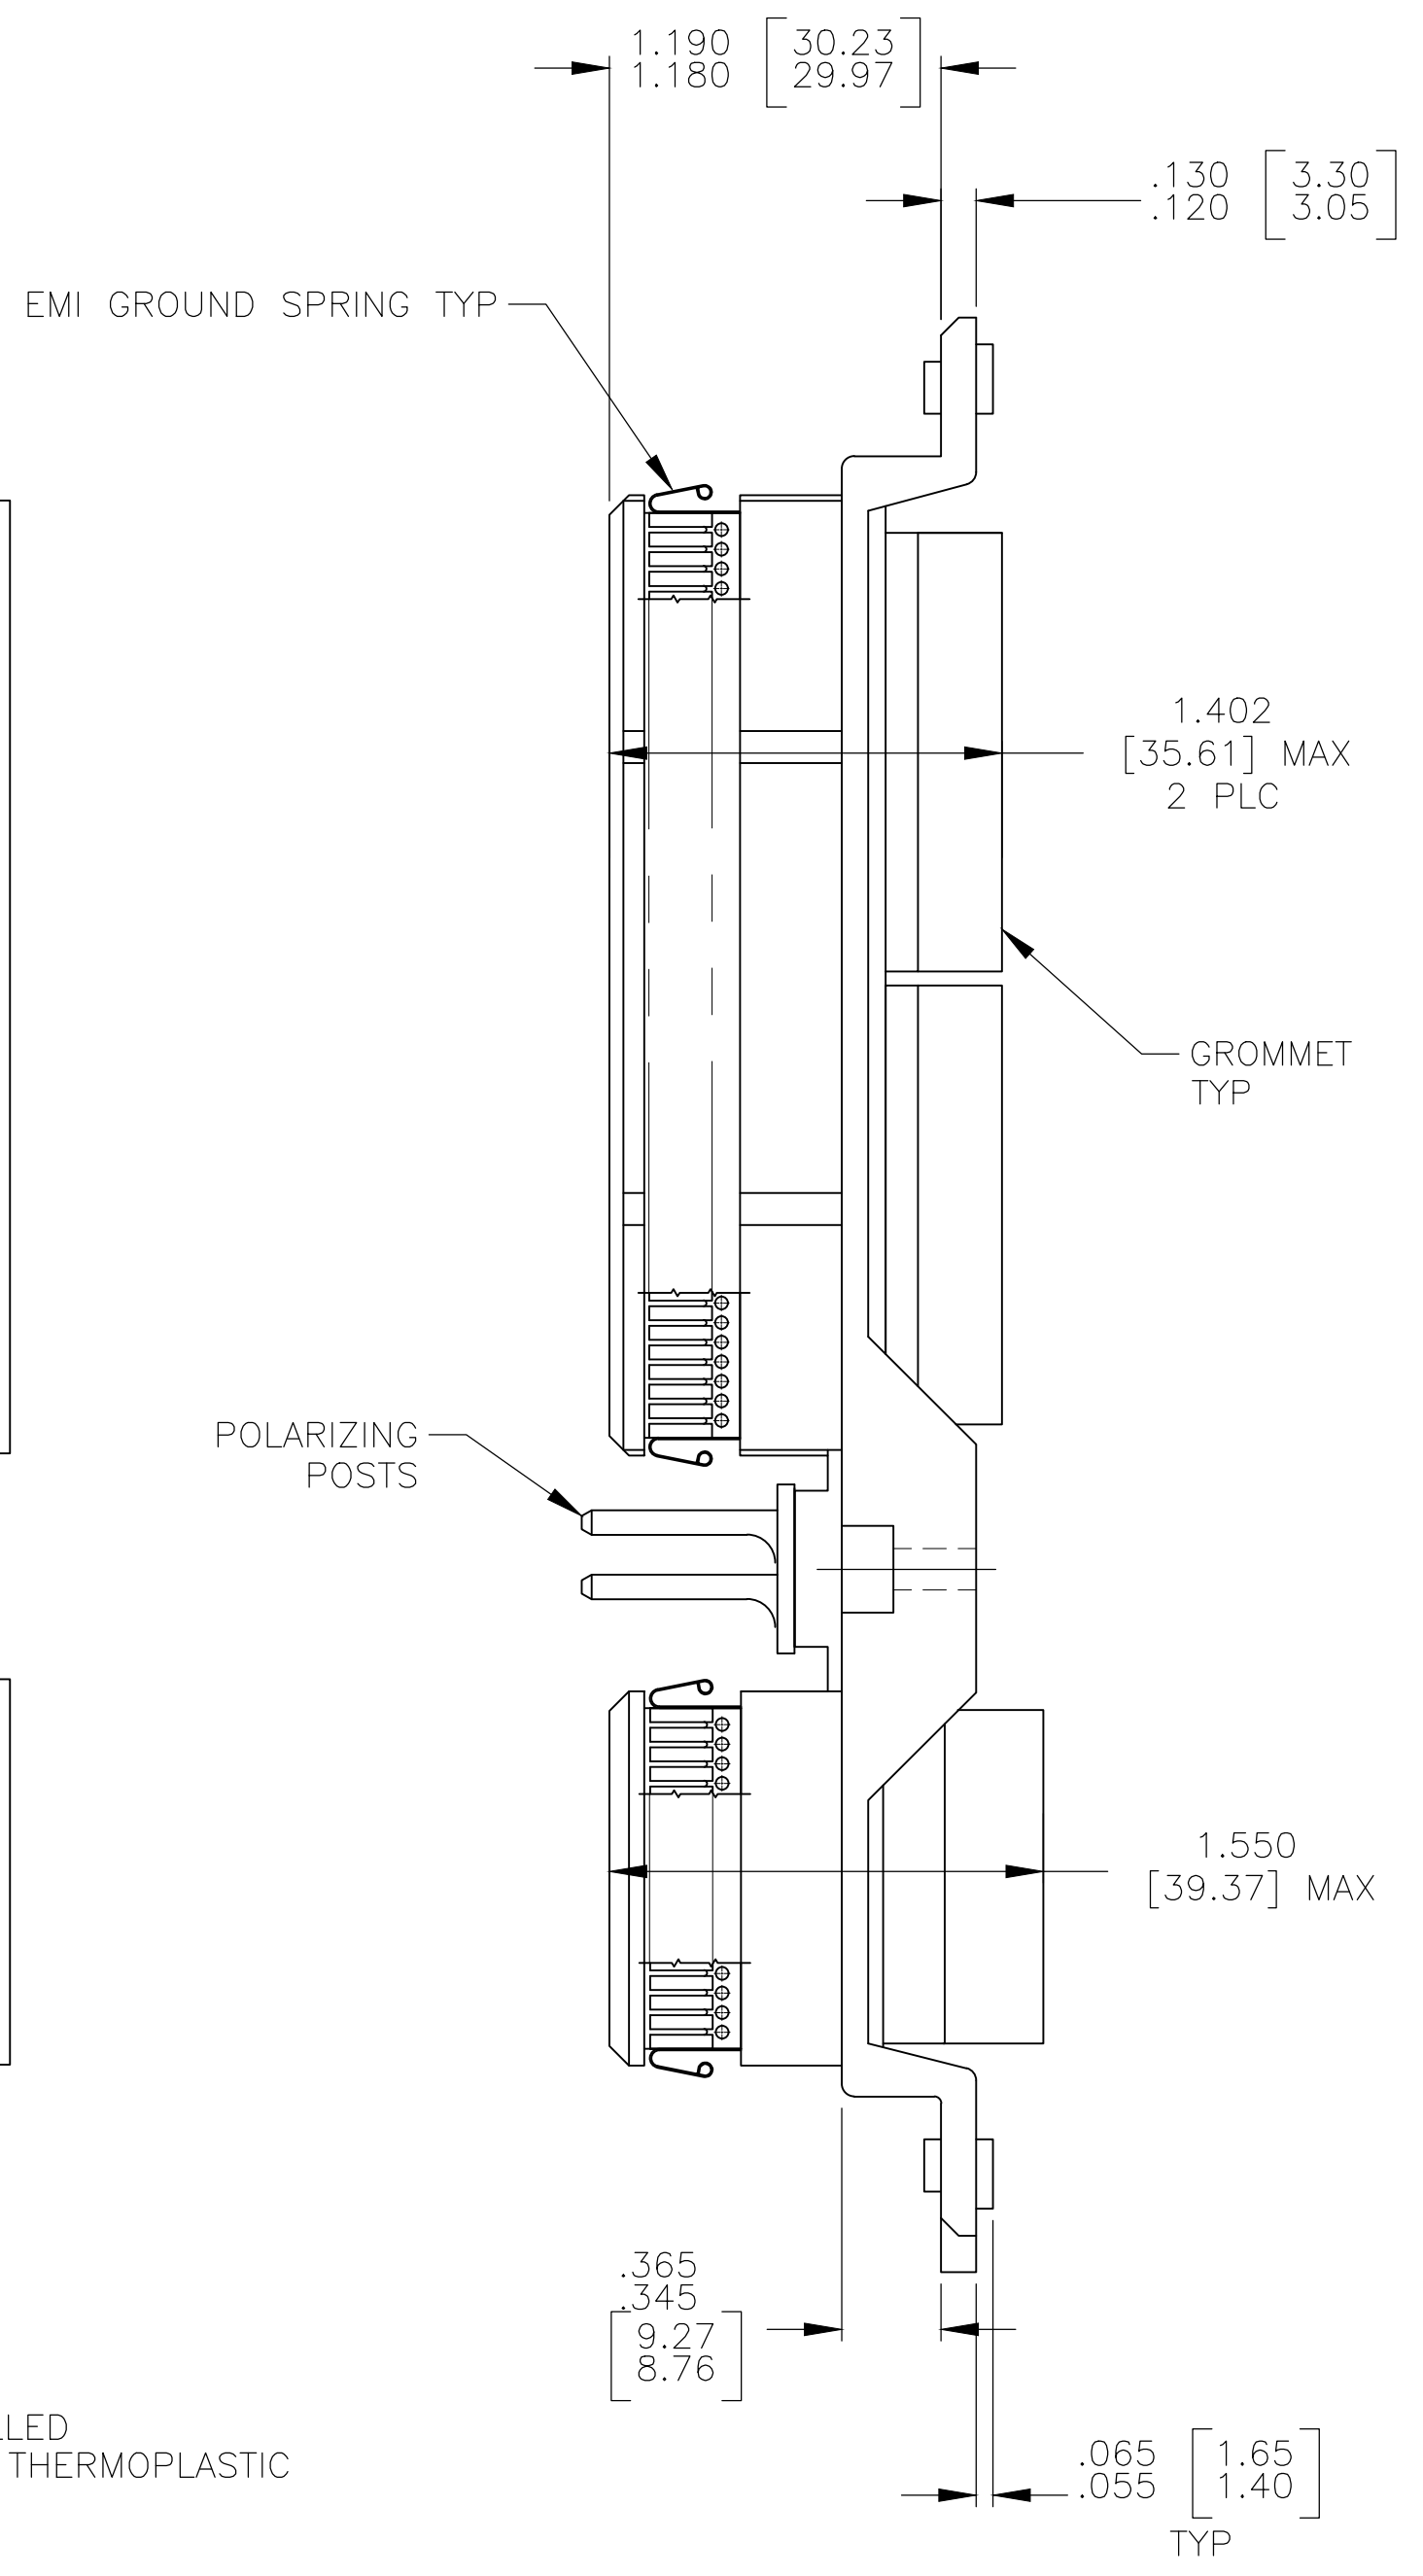


REVISIONS					
P	LTR	DESCRIPTION	DATE	DMN	APVD
B		REVISED PER ECO-17-015513	18DEC2017	PHM	CT

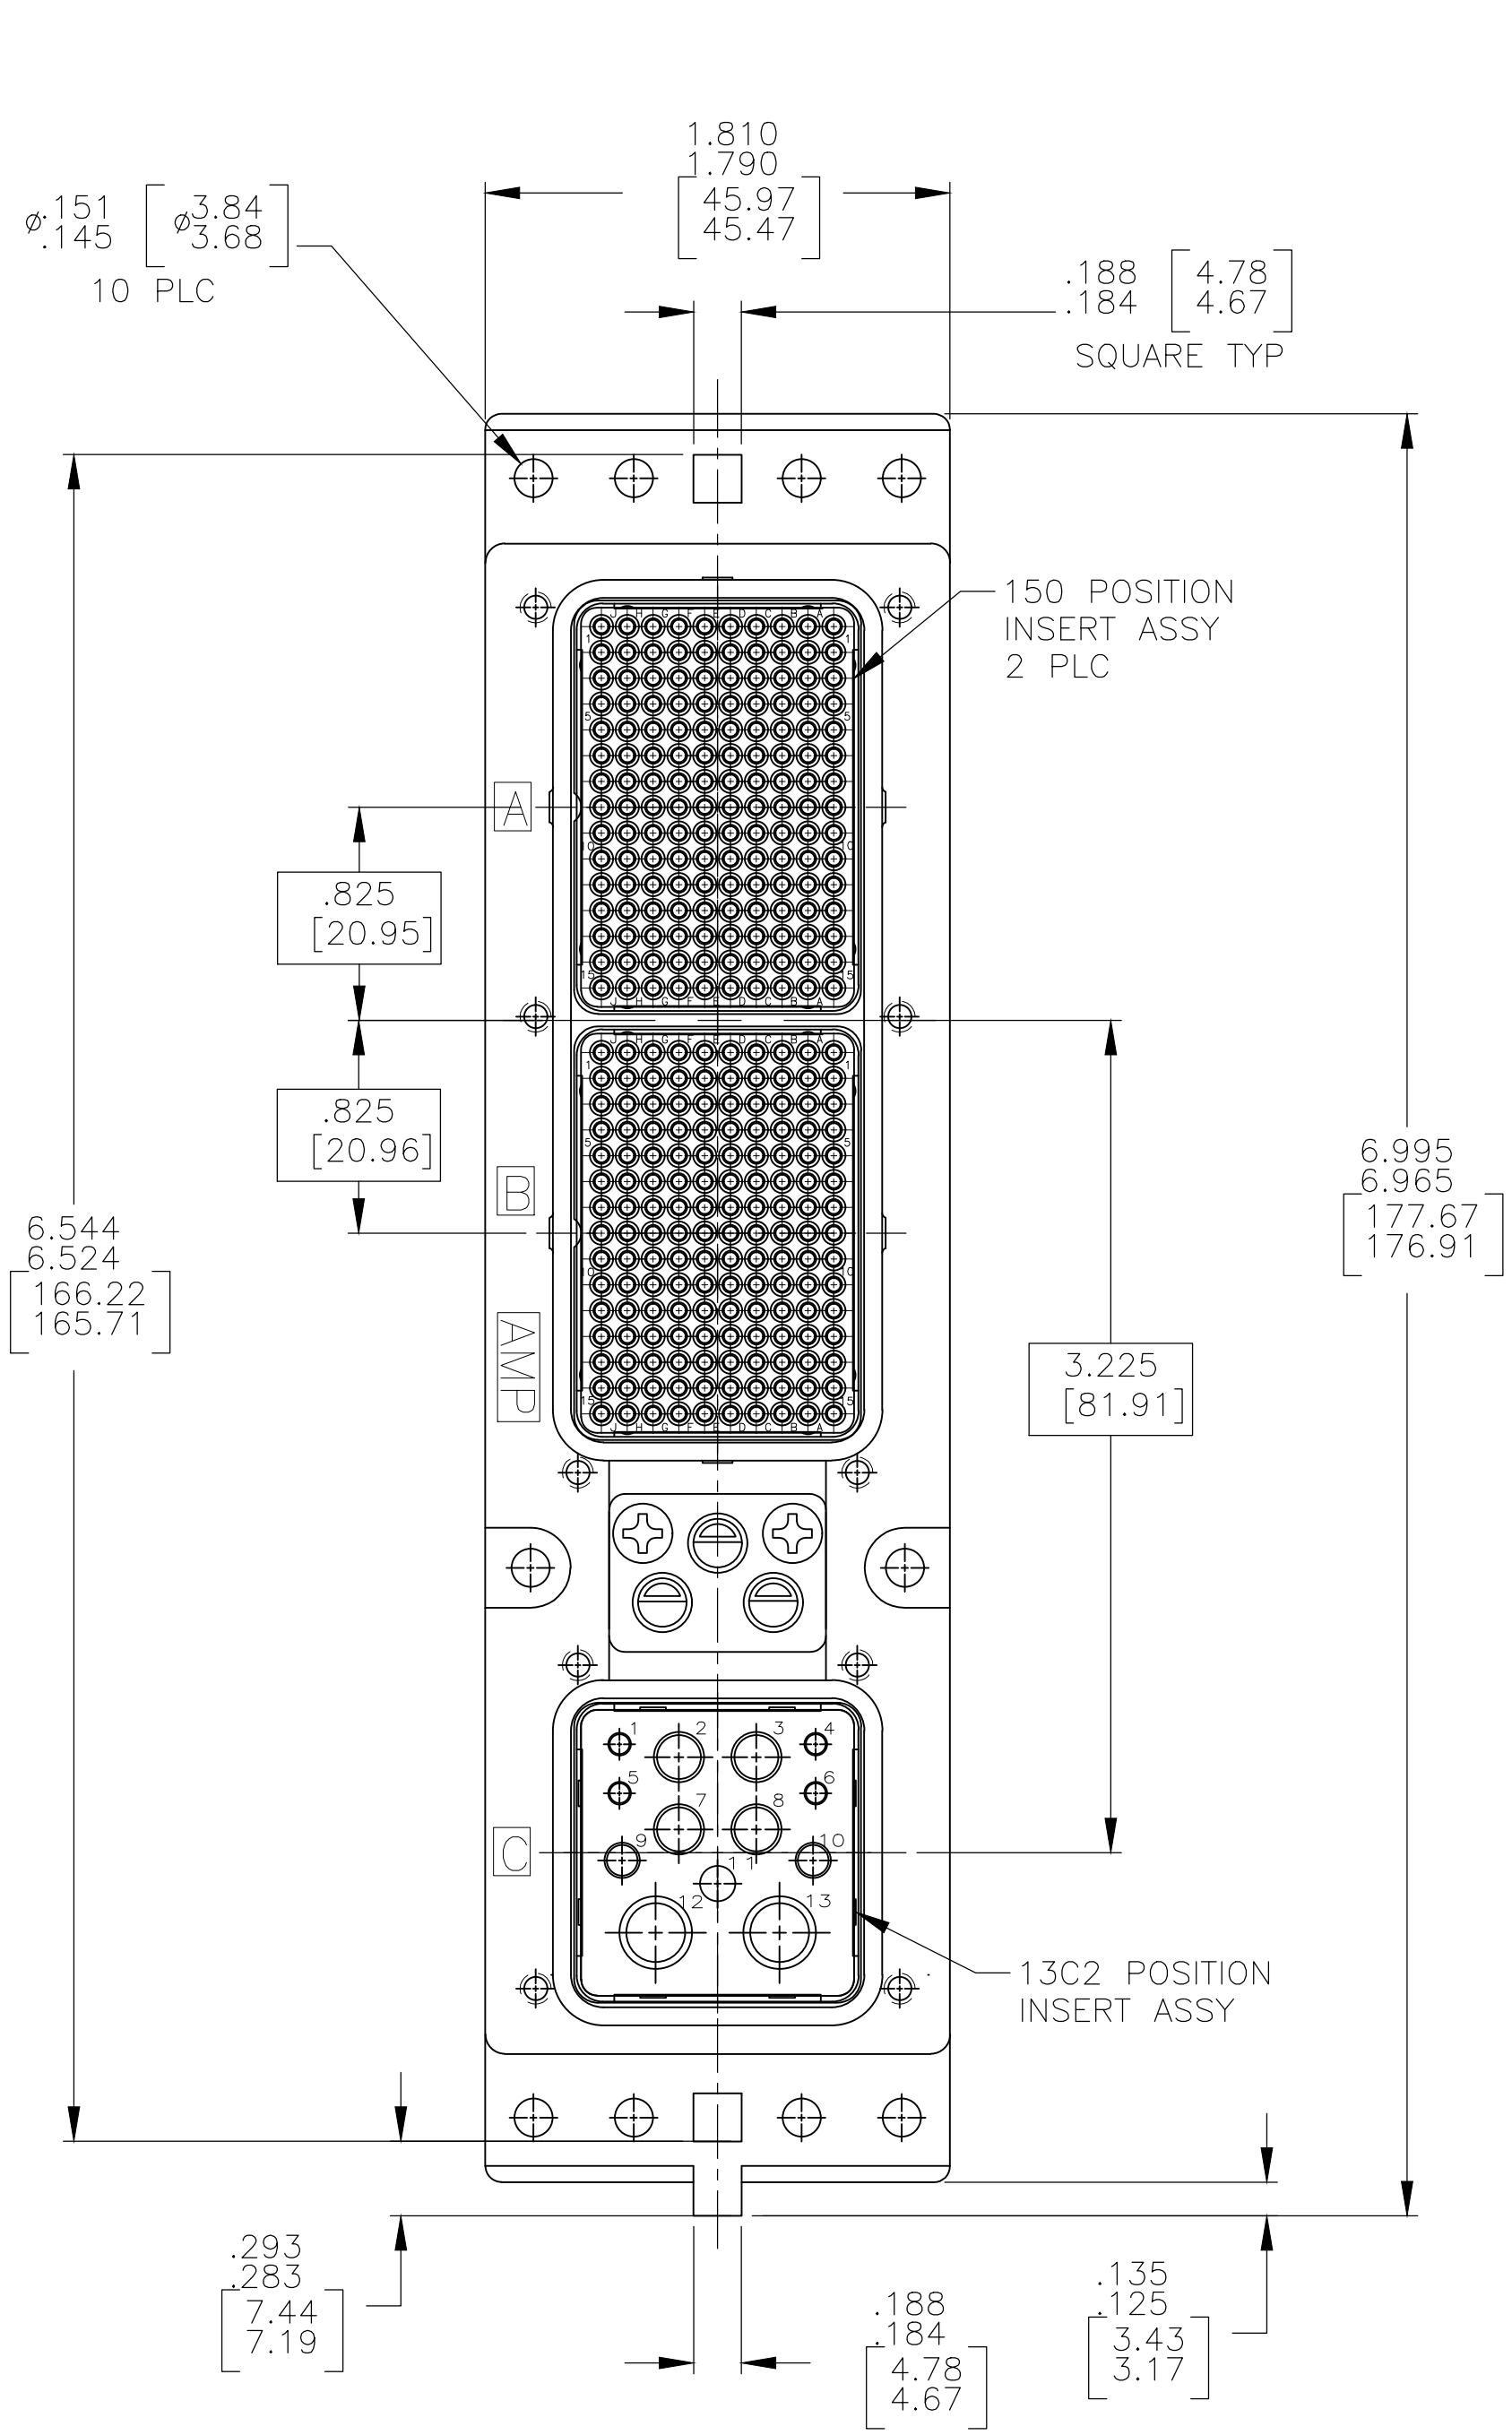

COMPONENT	MATERIAL	FINISH
SHELL	DIE CAST ALUMINUM PER ASTM-B-85	ELECTROLESS NICKEL PER MIL-C-26074
INSERT RETENTION PLATES	ALUMINUM ALLOY PER ASTM-B-209	ELECTROLESS NICKEL PER MIL-C-26074
SCREWS	STAINLESS STEEL	PASSIVATED
POLARIZING POST	ZINC ALLOY PER ASTM-B-86	-
150 & 13C2 INSERTS	THERMOSET OR THERMOPLASTIC PPS PER MIL-M-24519	-
POLARIZING POST RETAINING PLATE	ALUMINUM ALLOY PER ASTM-B-209	BLUE ANODIZED PER MIL-A-8625
EMI GROUND SPRING	BERYLLIUM COPPER 172 (ALLOY 29)	ELECTRODEPOSITED NICKEL PER AMS-QQ-N-290

01	MODULE A 208262-3; SZ 22 PIN CONTACT (QTY=150)	2286065-1
	MODULE B 208262-3; SZ 22 PIN CONTACT (QTY=150)	
KEYING POSITION	MODULE C 208267-2; SZ 20 SOCKET CONTACT (QTY=4)	CONTACTS & FILLER PLUGS INCLUDED AND NOT INSTALLED
	208270-2; SZ 16 SOCKET CONTACT (QTY=3)	
	208273-2; SZ 12 SOCKET CONTACT (QTY=4)	
	1484225-1 SZ 5 FILLER PLUG (QTY=2)	
		PART NUMBER

- CONNECTOR DIMENSIONS ARE PER ARINC 600 SPECIFICATION.
- CONNECTOR IS SUPPLIED WITH CONTACTS (PER TABLE) NOT INSTALLED.
- KEYING INSTALLED IN POSITION "01". FOR POSITION "00" KEYING HARDWARE SHIPPED UNASSEMBLED.
- CONNECTOR IS SUPPLIED WITH A DUST COVER INSTALLED FOR SHIPPING.

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONS: INCHES. TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± .005, 1 PLC ± .005, 2 PLC ± .005, 3 PLC ± .005, 4 PLC ± .005, ANGLES ± .005. FINISH: SEE TABLE. WEIGHT: SEE TABLE. CUSTOMER DRAWING. SCALE: 3:2. SHEET: 1 OF 1. REV: B.

APVD: W. BERNHART. DATE: 2-26-14. NAME: PLUG ASSY, SIZE 2, ARINC 600 (150/150/13C2) WITH GROUND SPRINGS. SIZE: A1. CASE CODE: 00779. DRAWING NO: 2286065. RESTRICTED TO: -.

STE TE Connectivity

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)