
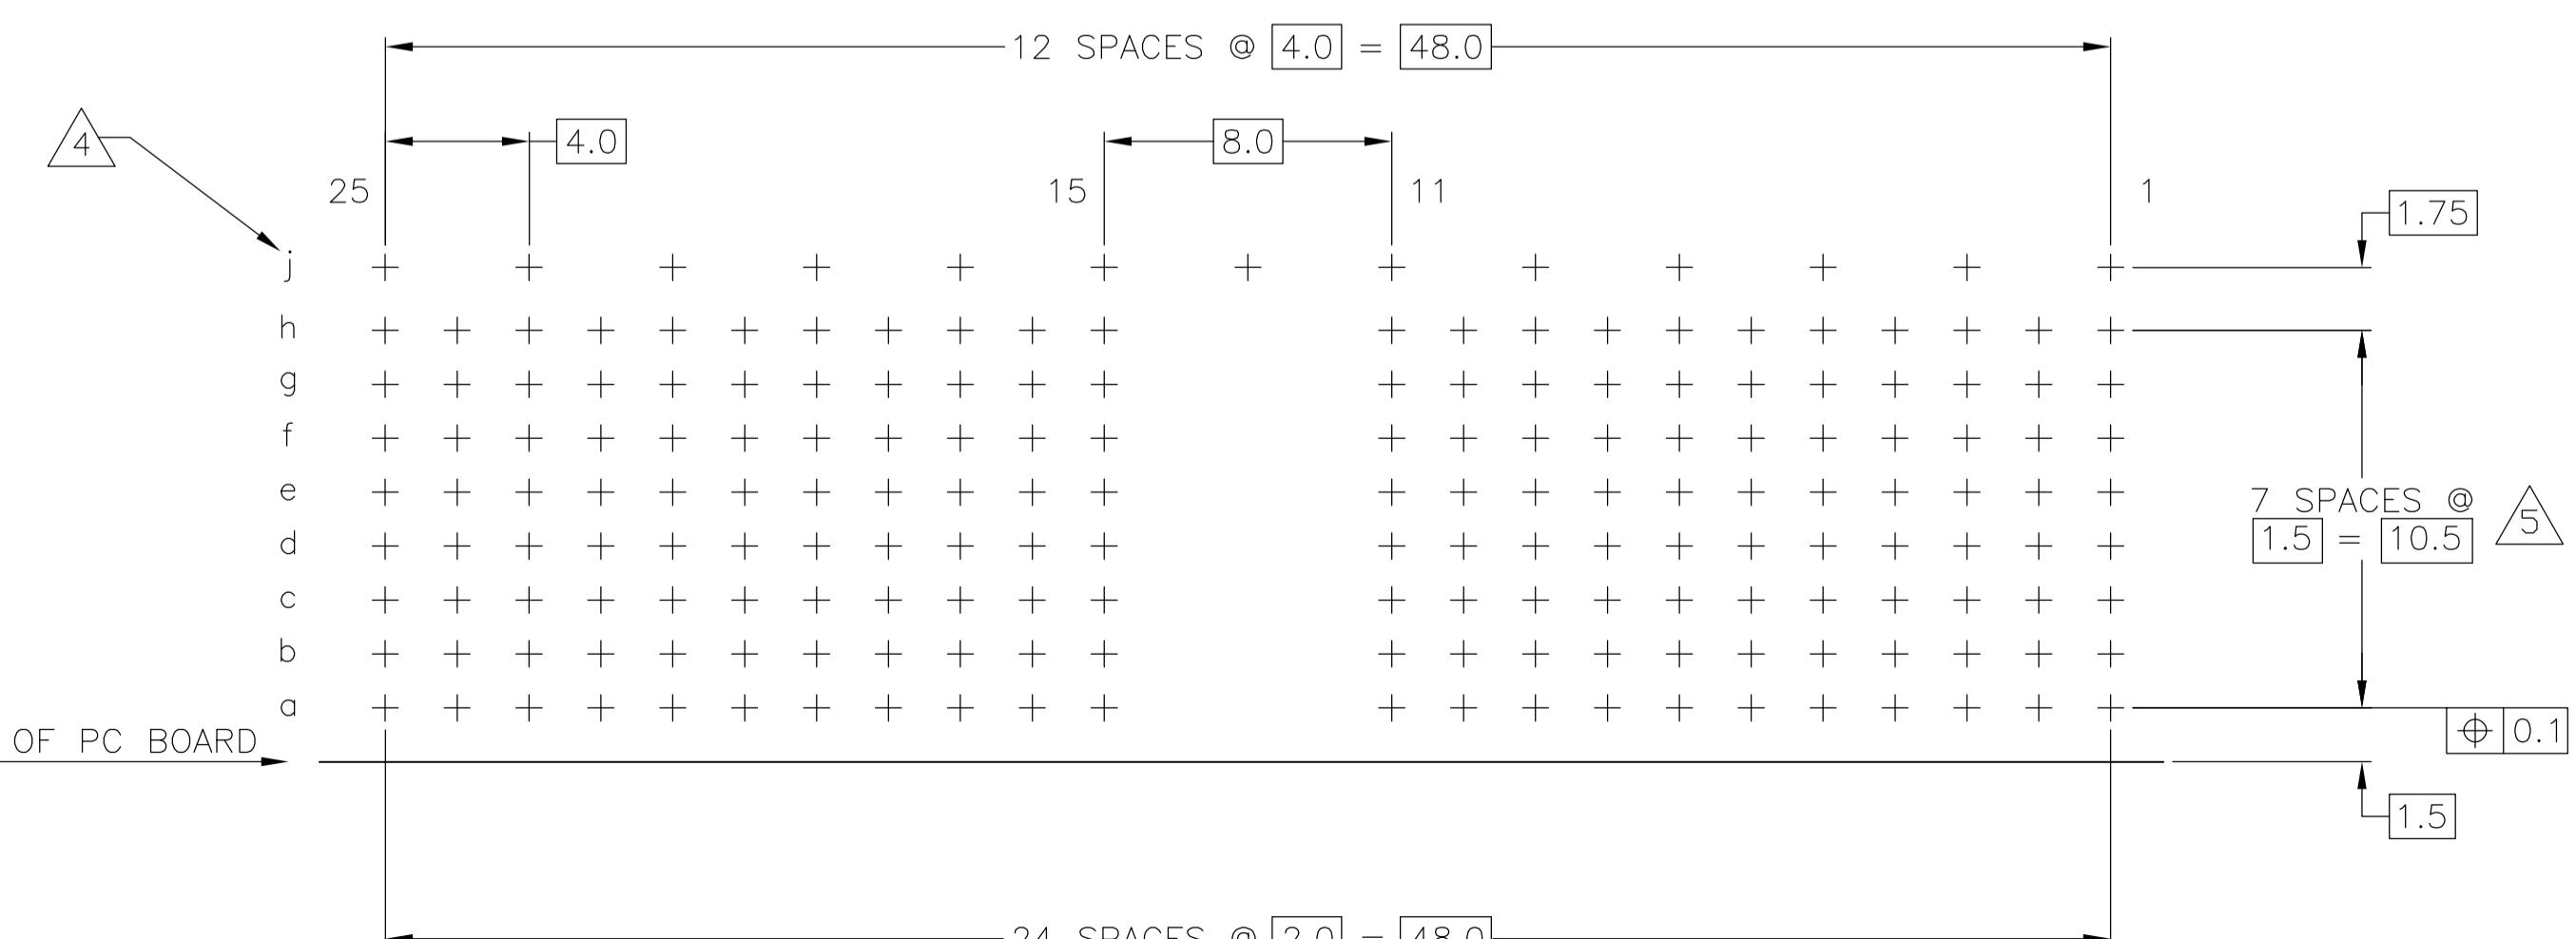
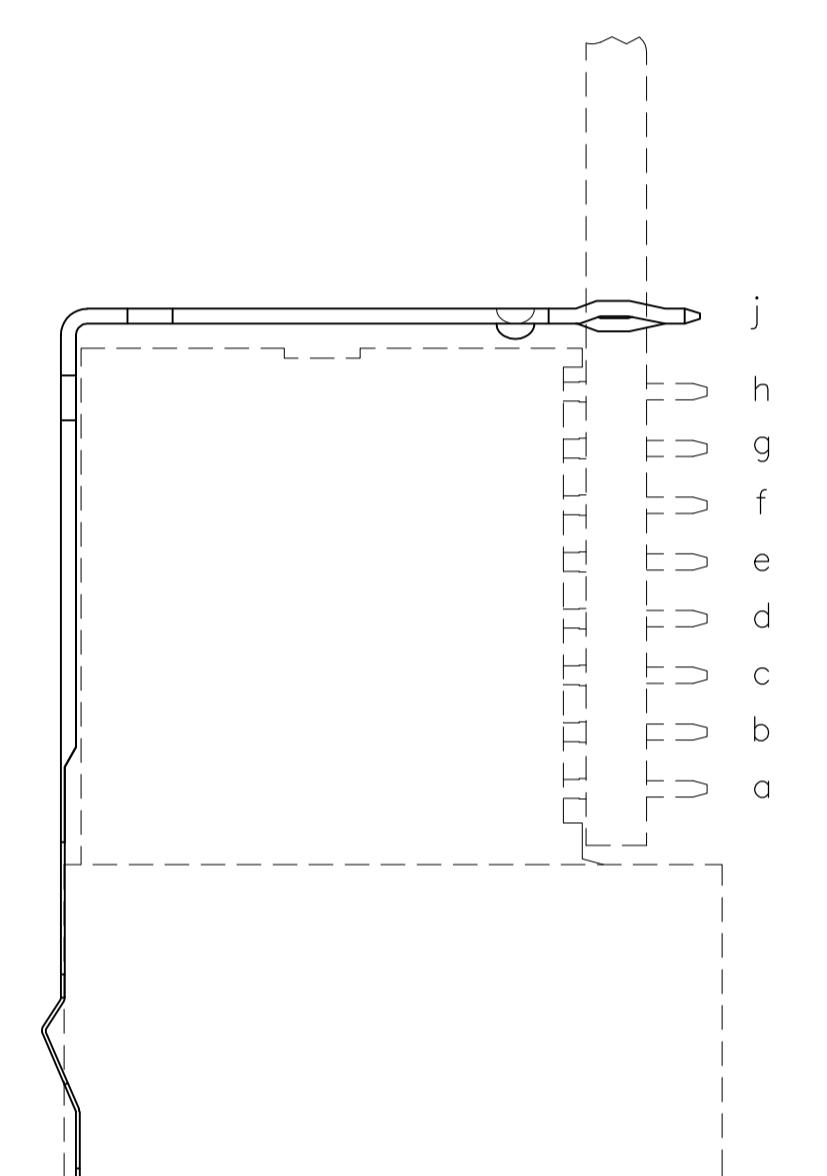


- 1** MATERIAL: PHOSPHOR BRONZE.
- 2** GENERAL PLATING SPECIFICATION: UNDERPLATING (ENTIRE CONTACT): 1.27µm MIN NICKEL AND ACTION PIN: 0.5µm MIN TIN/LEAD. FOR PLATING OF MATING SURFACES SEE APPLICABLE SPECIFICATION REFERENCE FOR EACH DASH NUMBER.
- 3** CONFORMS TO ALL TESTING ACCORDING TO IEC 61076-4-101 PERFORMANCE LEVEL 2.
- 4** ROW J 13 PLATED THROUGH HOLES FOR UPPER-SHIELD.
- 5** HOLE PATTERN FOR FEMALE CONNECTOR TYPE A. 176 PLATED-THROUGH HOLES A 1.5 X 2mm GRID.
- 6** CONTACT AREA LUBRICATED WITH BELLCORE APPROVED LUBRICANT. TECHNICAL REFERENCE: GR-1217-CORE, ISSUE 1, NOVEMBER 1995.
- 7** CONNECTOR TESTED AND QUALIFIED AGAINST TELCORDIA GR-1217-CORE QUALITY LEVEL 3 CENTRAL OFFICE APPLICATIONS.
- 8** OPTIONAL DIMPLES AT DISCRETION OF DIE ENGINEER.

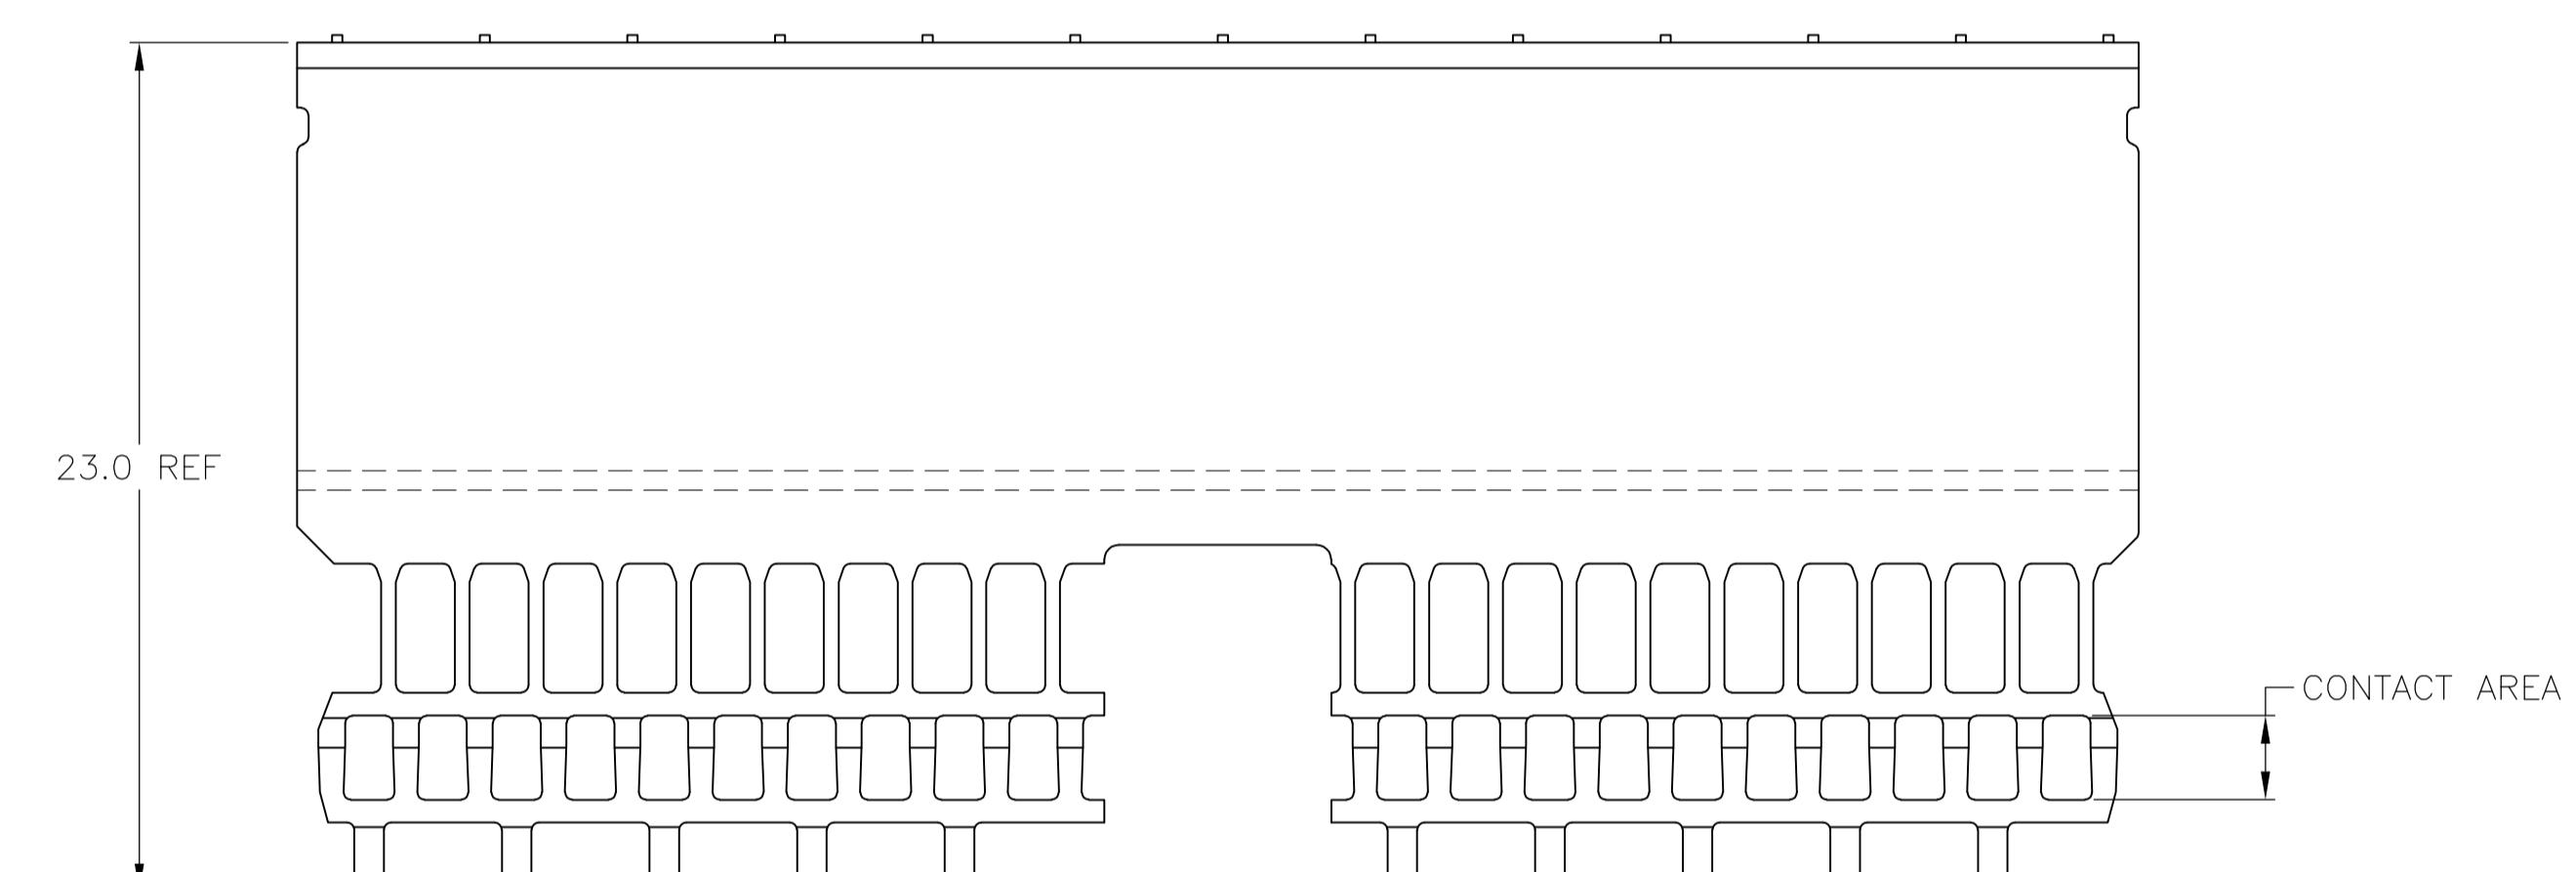

PLATED THRU HOLES PARAMETERS
REFERENCE APPLICATION SPECIFICATION

THIS DRAWING IS A CONTROLLED DOCUMENT.		DRAWING NO. 06DEC05		Tyco Electronics Corporation	
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		APVD G SKIPPER 06DEC05		GROUNDED RETURN UPPER-SHIELD, TYPE D	
0 PLC	± -	0 PLC	± 0.1	Z-PACK 2mm HM 8 ROW, FEMALE	
2 PLC	± -	2 PLC	± -	(INTEGRATED VERSION)	
3 PLC	± -	3 PLC	± -	108-19082	
4 PLC	± -	4 PLC	± -	APPLICATION SPEC	
				114-19036	
MATERIAL	SEE TABLE	FINISH	± -	CAGE CODE	DRAWING NO.
1				A1 00779	0646427
				RESTRICTED TO	
				WEIGHT	-
				CUSTOMER DRAWING	
				SCALE	5:1
				SHEET	1 OF 1
				REV	G

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)