
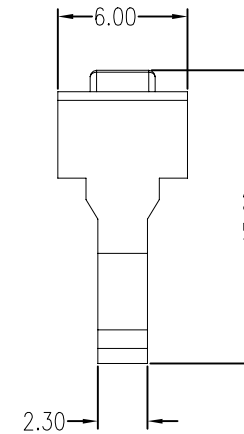


REVISIONS				
P	LFR	DESCRIPTION	DATE	DWN APVD
A1		ECR-20-016651	03DEC2020	F.F M.S

Notes:  
 Product Specification:  
 Operation Temperature: -40°C to +105°C  
 Material: PBT+30%G.F UL94V-0 BK  
 Match with \*-2271035-\*

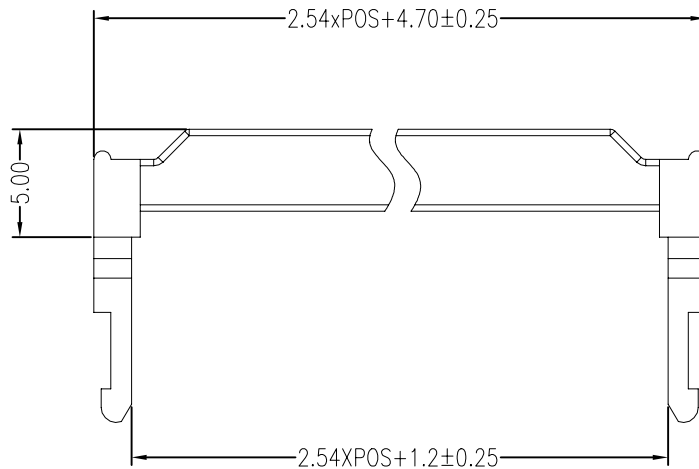

	64	32	6-2271036-4
	60	30	6-2271036-0
	50	25	5-2271036-0
	44	22	4-2271036-4
	40	20	4-2271036-0
	36	18	3-2271036-6
	34	17	3-2271036-4
	30	15	3-2271036-0
	26	13	2-2271036-6
	24	12	2-2271036-4
	22	11	2-2271036-2
	20	10	2-2271036-0
	18	9	1-2271036-8
	16	8	1-2271036-6
	14	7	1-2271036-4
	12	6	1-2271036-2
	10	5	1-2271036-0
	8	4	2271036-8
	6	3	2271036-6
PE BAG			
PACKAGING	No of pins(on matchable IDC socket connector)	POS	PN

PRODUCT FAMILY TABLE

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DWN FRANK FAN 03DEC2020	
		CHK GEORGE FU 03DEC2020	
		APVD MING SHI 03DEC2020	
		NAME	
		PRODUCT SPEC	STRAIN RELIEF, IDC SOCKET CONNECTOR, 2.54 PITCH
		APPLICATION SPEC	108-137371
MATERIAL	FINISH	WEIGHT	RESTRICTED TO
-	-	-	A2 00779 2271036
CUSTOMER DRAWING		SCALE 1:1	SHEET 1 of 1 REV A1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)