


REVISIONS				
P	LTR	DESCRIPTION	DATE	DMN APVD
B	REVISED PER	ECO-17-018523	19JAN2018	PHM CT

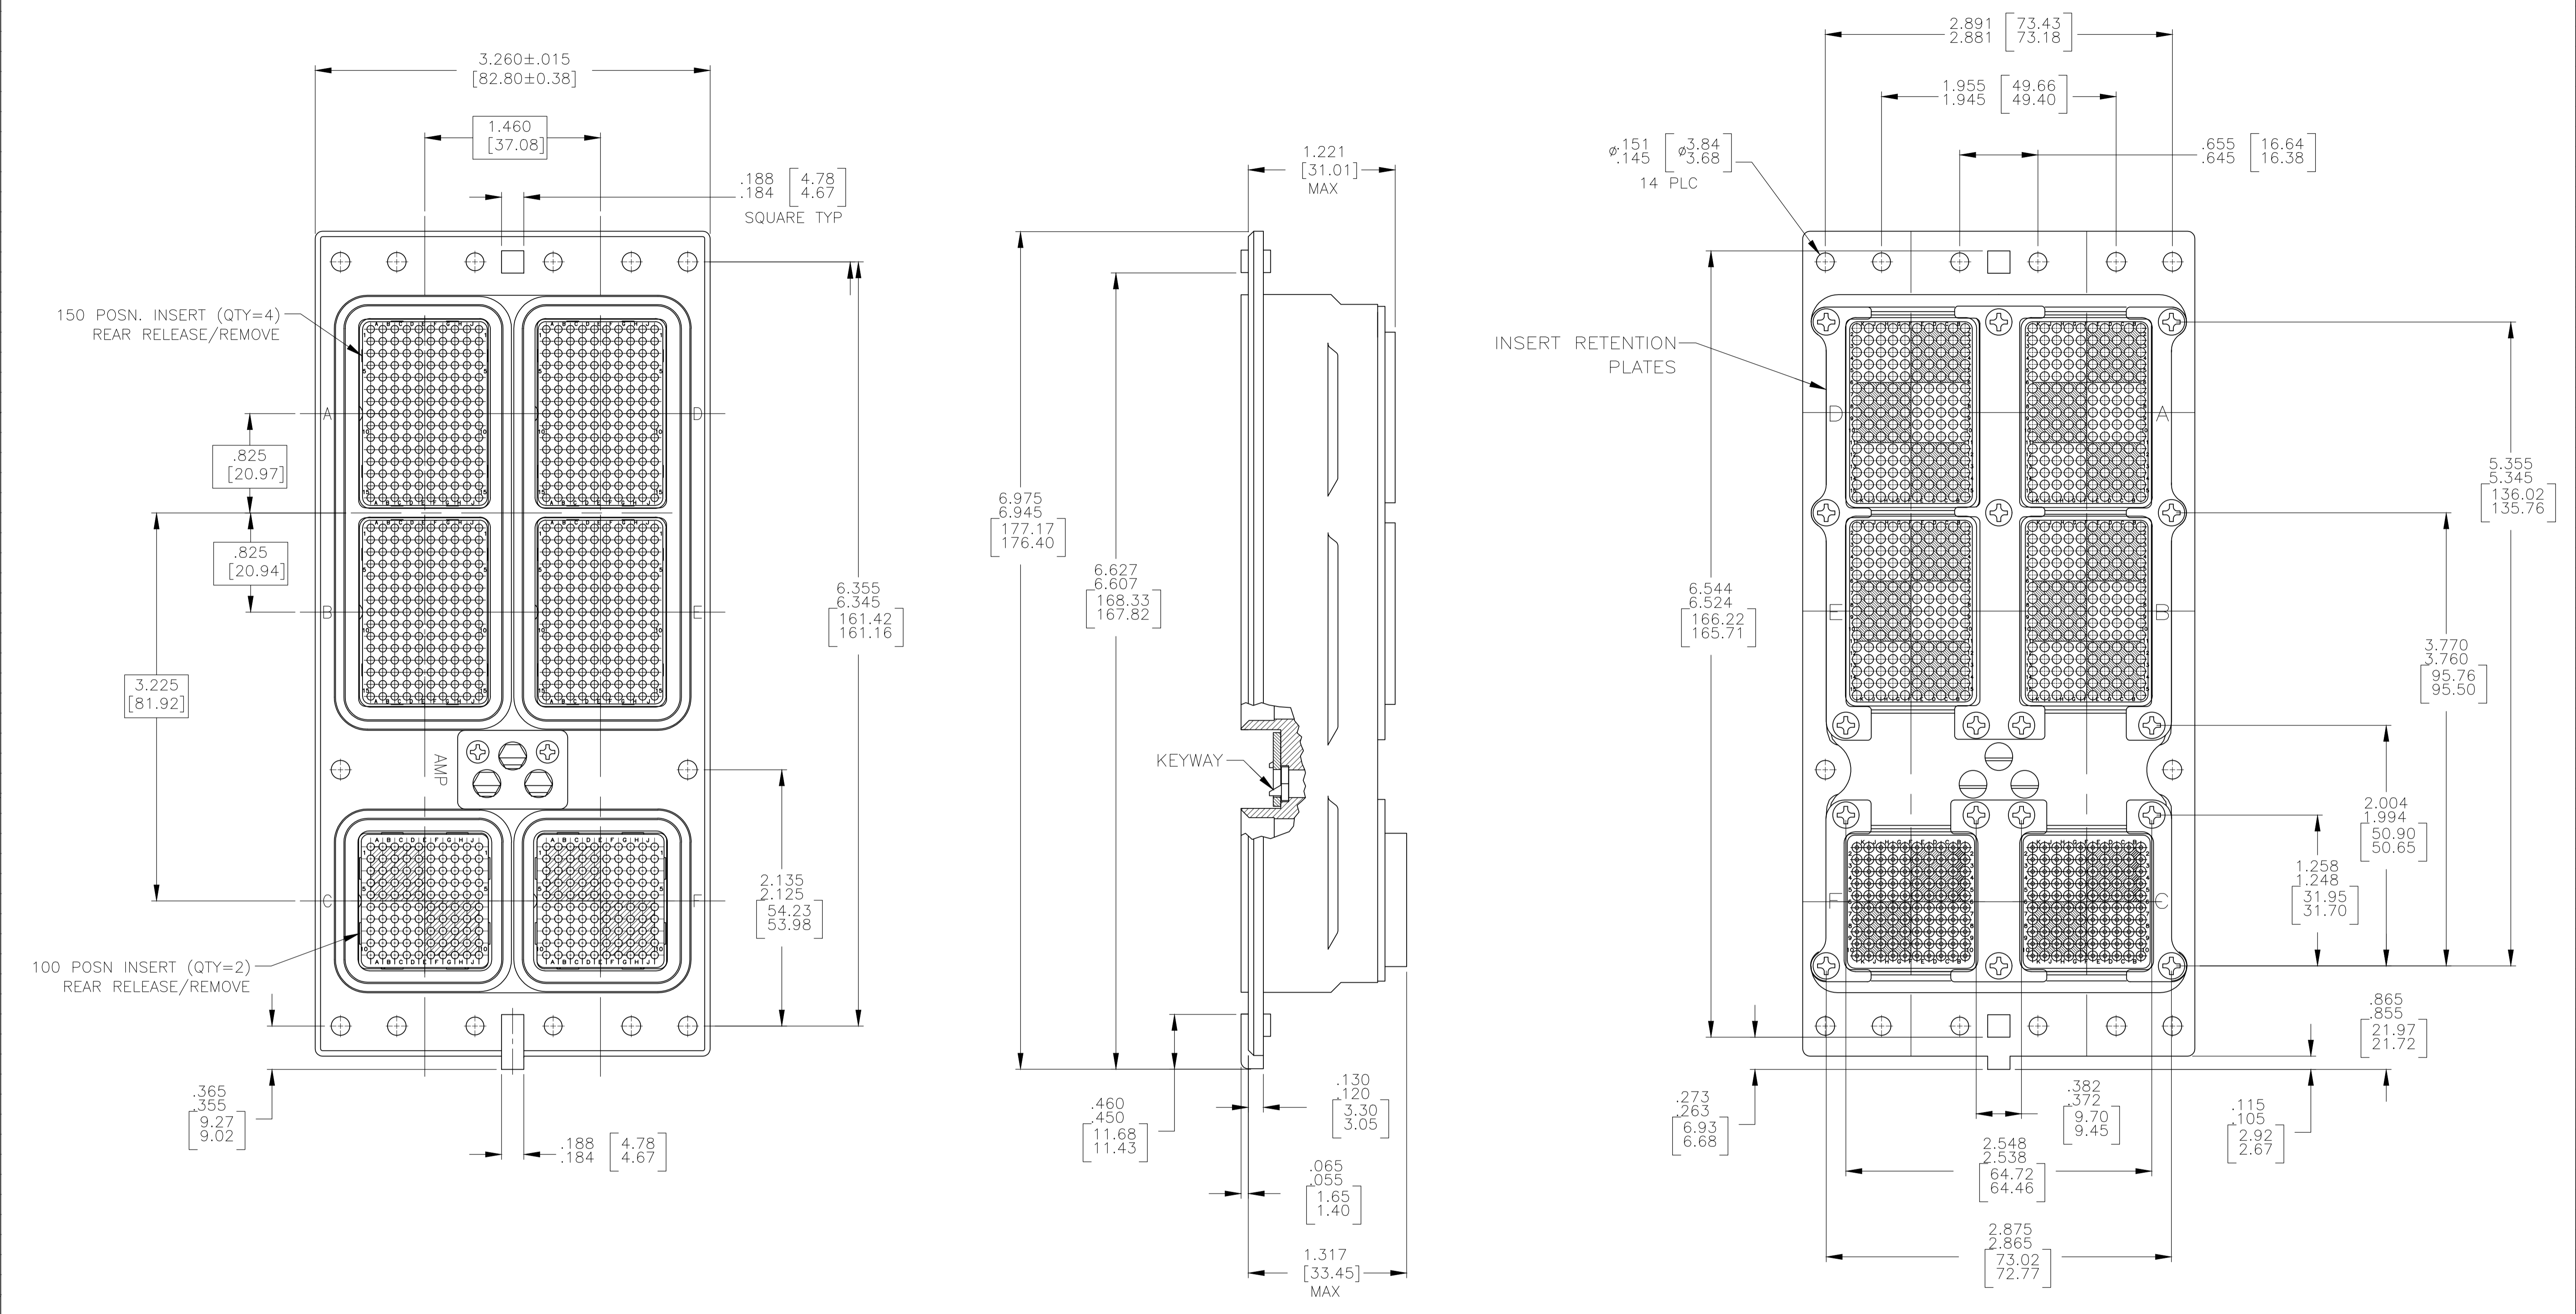

- CONNECTOR DIMENSIONS ARE PER ARINC 600 SPECIFICATION
- CONTACTS ARE NOT SUPPLIED WITH THIS CONNECTOR
- KEYING SHOWN IN POSITION "01" FOR REFERENCE ONLY. SEE TABLE FOR KEYING POSITION. FOR POSITION "00" KEYING SHIPPED UNASSEMBLED.
- DUST COVER (QTY=2) IS INSTALLED BEFORE SHIPPING (NOT SHOWN).

COMPONENT	MATERIAL	FINISH
SHELL	DIE CAST ALUMINUM PER ASTM-B-85	CHROMATE CONVERSION PER MIL-DTL-5541, CLASS 3, TYPE II.
RETENTION PLATES	ALUMINUM ALLOY PER ASTM-B-209	CHROMATE CONVERSION PER MIL-DTL-5541, CLASS 3, TYPE II.
SCREWS	STEEL OR STAINLESS STEEL	STAINLESS STEEL OR PASSIVATED
POLARIZING KEYS	ZINC ALLOY PER ASTM-B-86	-
POLARIZING KEY RETAINING PLATE	ALUMINUM ALLOY PER ASTM-B-209	BLUE ANODIZED PER MIL-A-8625
150 & 100 INSERTS	THERMOSET	-

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC	± .005
1 PLC	± .004
2 PLC	± .003
3 PLC	± .002
4 PLC	± .001
ANGLES	± .1°

MATERIAL SEE TABLE FINISH SEE TABLE

DMN	C.C.THOMAS	10-23-07
CHK	K.THACKSTON	10-23-07
APVD	K.THACKSTON	10-23-07
PRODUCT SPEC		
APPLICATION SPEC		
WEIGHT	0	
CUSTOMER DRAWING		

NAME	RCPT ASSY, SIZE 3, ARINC 600 (150/150/100/150/150/100)
SIZE	A1
CAGE CODE	00779
DRAWING NO	1996228
RESTRICTED TO	

SCALE 1:1 SHEET 1 OF 1 REV B

"02"	1996228-1
KEYING POSITION	PART NUMBER



A

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)