

CABLE, ELECTRIC, RADIATION-CROSSLINKED, EXTRUDED, MODIFIED, FLUOROPOLYMER-INSULATED, ONE CONDUCTOR, SHIELDED, JACKETED, NORMAL WEIGHT

18 August 1989


150°C

The complete requirements for procuring the cable described herein shall consist of this document and the issue in effect of Raychem Specification 55A.

COMPONENT WIRES - 55A6768

SHIELD - TIN-COATED COPPER

JACKET - RADIATION-CROSSLINKED, MODIFIED ETFE

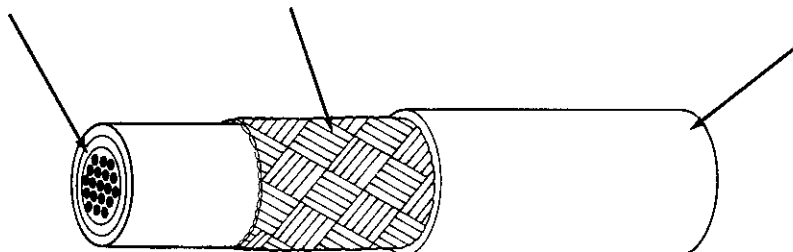

CABLE CONSTRUCTION DETAILS							
PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		OUTSIDE DIAMETER (in.)		MAXIMUM WEIGHT (lb/1000 ft)
			MINIMUM	NOMINAL	NOMINAL	MAXIMUM	
55A6931-18-*	18	38	.006	.008	.103	.108	13.3

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C
 Maximum continuous conductor temperature
 VOLTAGE RATING: 600 volts (rms)
 ACCELERATED AGING: 300 ± 3°C for 7 hours
 BLOCKING: 200 ± 3°C for 6 hours
 DIELECTRIC WITHSTAND: 1500 volts, 60 Hz
 FLAMMABILITY:
 Procedure 1, 3 seconds (maximum); 3 in. (maximum);
 no flaming of facial tissue
 JACKET COLOR: White preferred
 JACKET ELONGATION AND TENSILE STRENGTH:
 Elongation, 50% (minimum)
 Tensile Strength, 5000 lbf/in² (minimum)
 JACKET FLAWS:
 Spark Test, 1000 volts, 60 Hz (rms), 100% test
 Impulse Dielectric Test, 6.0 kV (peak), 100% test

LIFE CYCLE: 200 ± 3°C for 168 hours
 LOW TEMPERATURE-COLD BEND: -65 ± 5°C for 4 hours
 SHIELD COVERAGE: 85% (minimum)
 CROSSLINKED VERIFICATION: 300 ± 3°C for 6 hours
 VOLTAGE WITHSTAND TEST: (After Accelerated Aging, Immersion, Life Cycle, Low Temperature-Cold Bend and Crosslinked Verification) 1000 volts, 60 Hz, 1 minute

PART NUMBER:
 The "*" in the part number above shall be replaced by color code designators in accordance with MIL-STD-681 with a dash separating the component wire color from the jacket color.
 Example:
 White component wire ; white jacket:
 55A6931-18-9-9

NOTE: Nominal values are for information only.
 Nominal values are not requirements.

RECEIVED
 AUG 28 1989
 W&C DEPT

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
 REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

Raychem
 Raychem Corporation
 300 Constitution Drive, Menlo Park, California 94025-1165
 415) 361 3333 TWX 910 373 1728

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)