



.085 (2.1)
DIA.(REF)

.580 (14.8)
MAX.

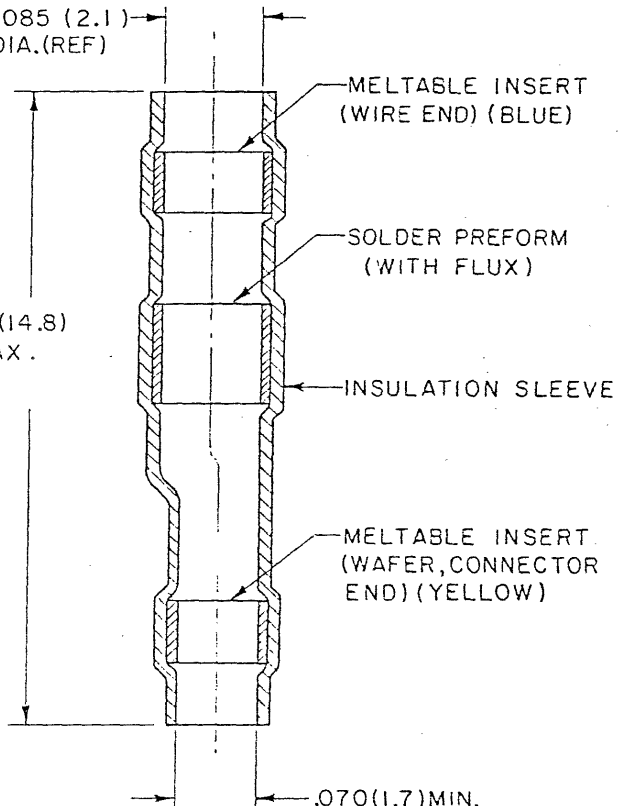

RED
COLOR CODE

.070 (1.7) MIN.
DIA.

® TRADEMARK OF RAYCHEM CORP.

NOTES:

1. MATERIAL:

I-A INSULATION SLEEVE; HEAT SHRINKABLE, RADIATION CROSSLINKED MODIFIED POLYVINYLIDENE FLUORIDE, TRANSPARENT BLUE.

I-B SOLDER PREFORM; SOLDER TYPE: Sn 63
FLUX TYPE: RA
PER QQ-S-571

I-C MELTABLE INSERTS; LOW OUTGASSING, IMMERSION RESISTANT THERMOPLASTIC.

2. THIS SLEEVE IS DESIGNED TO ATTACH 20 THROUGH 26 GAGE TIN, NICKEL OR SILVER PLATED CONDUCTORS TO TERMINALS OF A **Raychem** MTC100 SERIES WAFER. CONSULT FACTORY FOR 18 GAGE APPLICATIONS.

⊠ WEIGHT: .0001 lbs. [0.045g] MAX.

REVISIONS

LTR	DESCRIPTION	DATE	APPROVED
A	REVISED PER ECN T-17674	92 Aug 16	JB

If this document is printed it becomes uncontrolled.
Check with the web for latest revision.

SPECIFICATION CONTROL DRAWING © Raychem Corporation 1983

DRAWN	CACELA	11-16-83	Raychem	RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025	
CHECKED	JB			TITLE	
APPROVED	<i>giller</i>	11-29-83	SOLDERSLEEVE [®] WIRE TERMINATOR		
APPROVED	<i>Lawson</i>	12-2-83	WITH OVAL ENTRY		
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE IN PARENTHESIS			TEMP. RATING 125°C MTC100 SERIES		
SIZE	CODE IDENT. NO.	DWG. NO.	B 06090 CTA-0068		
DO NOT SCALE THIS DRAWING			WEIGHT	1/3	SHEET 1 OF 1

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)