


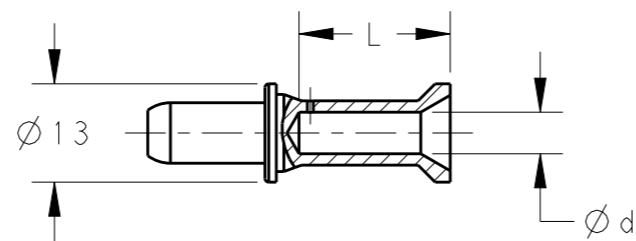


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 20
 © COPYRIGHT 20 BY - ALL RIGHTS RESERVED.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL	25JUN2015	DW	CW

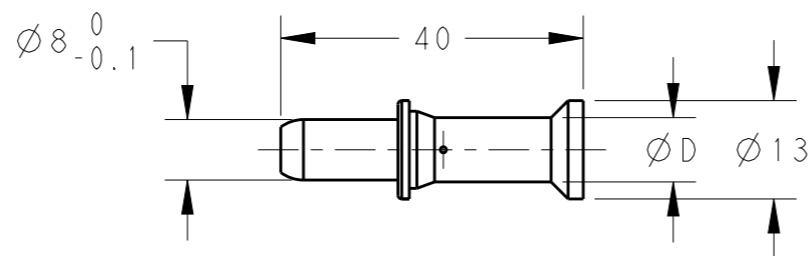


1) $\phi d = 4.3, 5.5, 7.0$






NOTES:
 1. TECHNICAL CHARACTERISTICS:
 CONTACT MATERIAL: BRASS
 SURFACE PLATING:
 SILVER PLATING: $\geq 2\mu m$
 CONTACT RESISTANCE: $\leq 0.5m\Omega$
 WIRE RANGE: SEE TABLE
 OPERATION TEMPERATURE: $-40\sim+125^{\circ}C$

注释:
 1. 技术参数:
 公针材料: 黄铜
 表面电镀:
 镀银: $\geq 2\mu m$
 接触电阻: $\leq 0.5m\Omega$
 接线范围: 见表格
 工作温度: $-40\sim+125^{\circ}C$



2) $\phi d = 8.2$

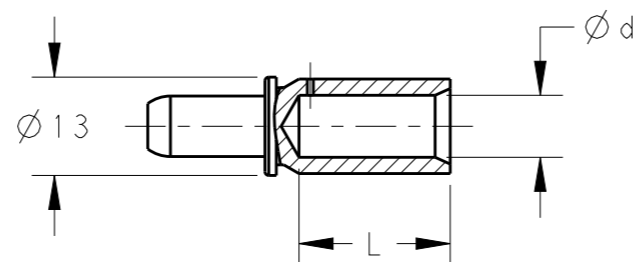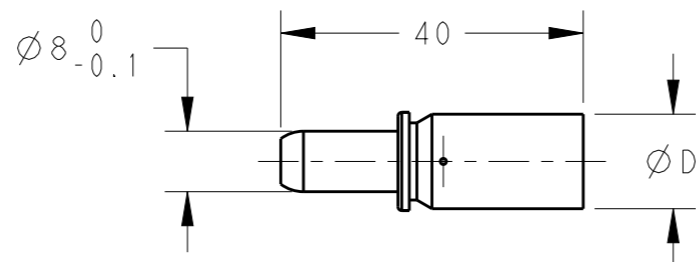

PART NUMBER	ϕd	ϕD	WIRE GAUGE	STRIPPING LENGTH L (mm)
T2050001010-000	4.3	5.6	10	20
T2050001016-000	5.5	8.5	16	
T2050001025-000	7.0	10.0	25	
T2050001035-000	8.2	12.5	35	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 25JUN2015 David Wang			
DIMENSIONS: mm		CHK 25JUN2015 Chris Wang			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 25JUN2015 Xiang Xu	NAME CNM PIN CONTACT		
0 PLC \pm -		PRODUCT SPEC 108-137058	RESTRICTED TO		
1 PLC \pm -		APPLICATION SPEC 114-137058	SIZE A3	CAGE CODE 00779	DRAWING NO T20500010XX000
2 PLC \pm -		WEIGHT -	SCALE 1:1		
3 PLC \pm -		MATERIAL -	SHEET 1 OF 1		
4 PLC \pm -		FINISH -	REV A		
ANGLES \pm -		Customer Drawing			

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)