



M12 X-CODE

CONNECTOR SERIES


M12 X-CODE SERIES

CONNECTORS

Modern Railway networks are all about speed and reliability. If it were the data transmission speed, the assembly time, avoiding network interruptions or reducing cost of service, all are equally important. Our full metal shell IP67 sealed X-coded M12 connector offers all of the above and more in one product.

The 360° cable shield termination ensures the best possible data transmission speed while the machined, gold plated crimp contacts and unique torsion free jacket crimping system guarantees uninterrupted service throughout the connector lifetime.

Features

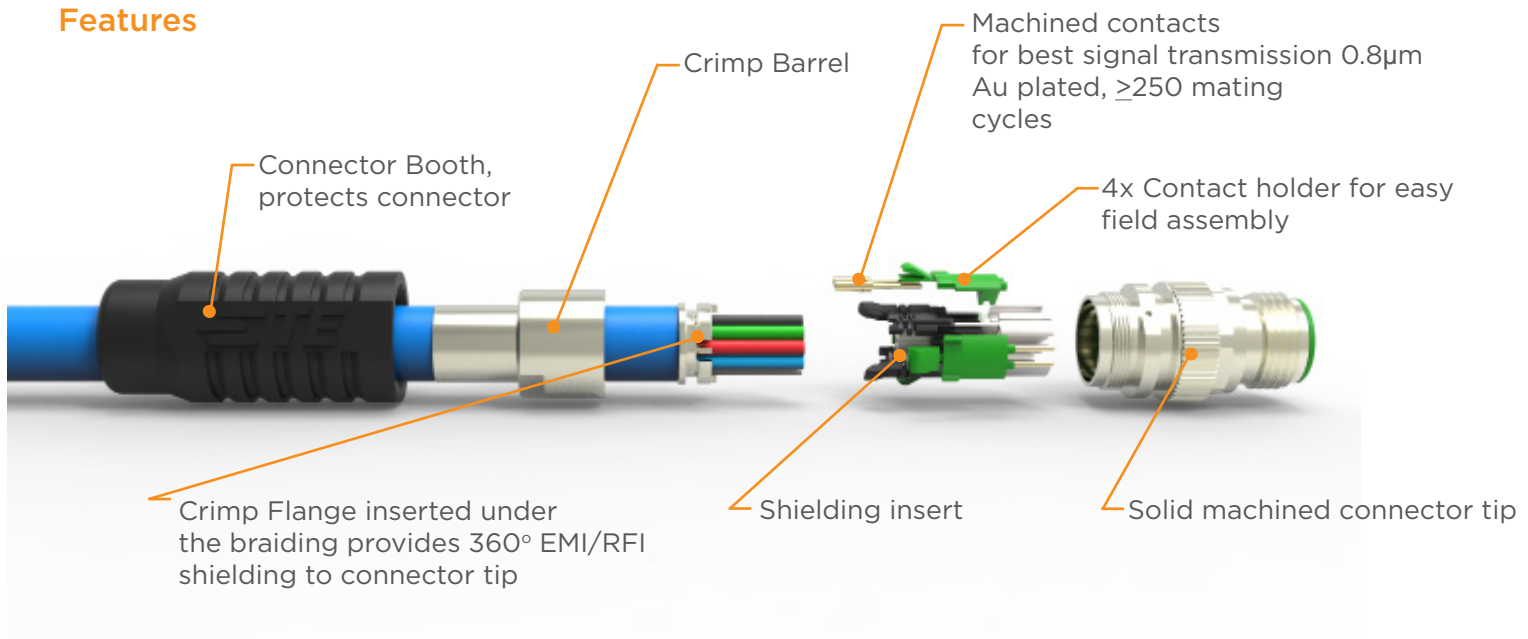

Benefits



- Speed: up to 10Gb/second according to IEC 802.3an Cat 6a
- Reliability: Unique cable jacket crimping system leads to fail safe connections
- High data performance due to 360° EMI shielding
- High system reliability due to Torsion free cable crimping leads to reduced cost of service
- Field installable and compact dimensions
- Full metal shell and IP67 sealed
- Turned contacts for high vibration environments
- All non metal components except for the booth NFF-16-101/102 and EN45545-2 HL3 compliant
- The crimp flange and crimp barrel will be qualified to match the chosen cable contacts available for wire size AWG22-28

M12 X-Code Series

Connectors Series

Technical Data	
Connectors	M12 acc. IEC 61076-2-109
Coding-Pin number	X
Current rating	0.5 A
Nominal voltage	48 V
Contact resistance	$\leq 5 \text{ m}\Omega$
Insulation resistance	$\geq 100 \text{ m}\Omega$
Overvoltage category	III acc. to EN 60664-1:2007
Pollution degree	3 acc. to EN 60664-1:2007
Category	cat. 6 _A
Data transmission rate	Up to 10Gbit acc. to IEC 802.3an
Termination single wire	Machined crimp snap-in contacts
Wire size	AWG 22-28
Cable strain relief and cable shield termination	Crimp flange system with crimp insert + crimp sleeve
IP protection	IP67 (only screw-locked)
Temperature range	With grip cap: -40°C to +70°C Without grip cap: -40°C to +85°C
Mechanical lifetime	≥ 250 mating cycles
Shock and vibration	DIN EN 61373 Category 1, class B
Materials	
Housing	Cu alloy Ni plated
Insulator & Contact holder	Thermoplast I2/F2 acc. to NFF-16-101/102 and HL3 acc. to R22/R23 EN45545-2
Material	Cu alloy
Plating	Au
Grip booth	TPE with S3 and SR2 acc. to DIN 5510-2
Sealings	Elastomer

LET'S CONNECT

We make it easy to connect with our experts and are ready to provide all the support you need. Just call your local support number or visit www.te.com/industrial to chat with a Product Information Specialist.

TECHNICAL SUPPORT

te.com/support-center

Australia	+86 400-820-6015	Hungary	+36 1-2892040	Portugal	+34 91-6630420
Austria	+43 1-9056-0	India	+86 400-820-6015	Russia	+74 95-790-2200
Belgium	+31 73-6246999	Ireland	+1 800-882-391	Slovakia	+42 02-720-11102
Brazil	+55 11-2103-6000	Italy	+39 011-4012111	Slovenia	+38 615-602-132
China	+86 400-820-6015	Japan	+044-844-8052	South Africa	+97 150-457-0806
Czech Republic	+42 02-7201-1103	Korea	+02-3415-4607	Spain	+34 932-910-330
Denmark	+46 8-5072-5000	Latvia	+37 2-6778-673	Sweden	+46 8-5072-5000
Estonia	+37 2677-8673	Lithuania	+37 037426900	Switzerland	+41 71-447-0447
Finland	+46 8-5072-5000	Luxembourg	+31 73-6246999	Taiwan	+86 400-820-6015
France	+33 1-34-20-8686	Netherlands	+31 73-6246999	Turkey	+90 212-282-6053
Germany	+49 6151-607-1999	New Zealand	+86 400-820-6015	United Kingdom	+44 800-267666
Greece	+97 1-4-347-0226	Norway	+46 8-5072-5000	USA	800-522-6752
Holland	+31 73-6246999	Poland	+48 22-4576750		

te.com

TE Connectivity, TE Connectivity (logo), Every Connection Counts are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

The information given herein, including drawings, illustrations and schematics which are intended for illustration purposes only, is believed to be reliable. However, TE Connectivity makes no warranties as to its accuracy or completeness and disclaims any liability in connection with its use. TE Connectivity's obligations shall only be as set forth in TE Connectivity's Standard Terms and Conditions of Sale for this product and in no case will TE Connectivity be liable for any incidental, indirect or consequential damages arising out of the sale, resale, use or misuse of the product. Users of TE Connectivity products should make their own evaluation to determine the suitability of each such product for the specific application.

© 2017 TE Connectivity Ltd. family of companies All Rights Reserved.
1-1773937-8 CC 0917

PRODUCT CATALOGUE

TE Connectivity
Rail

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)