

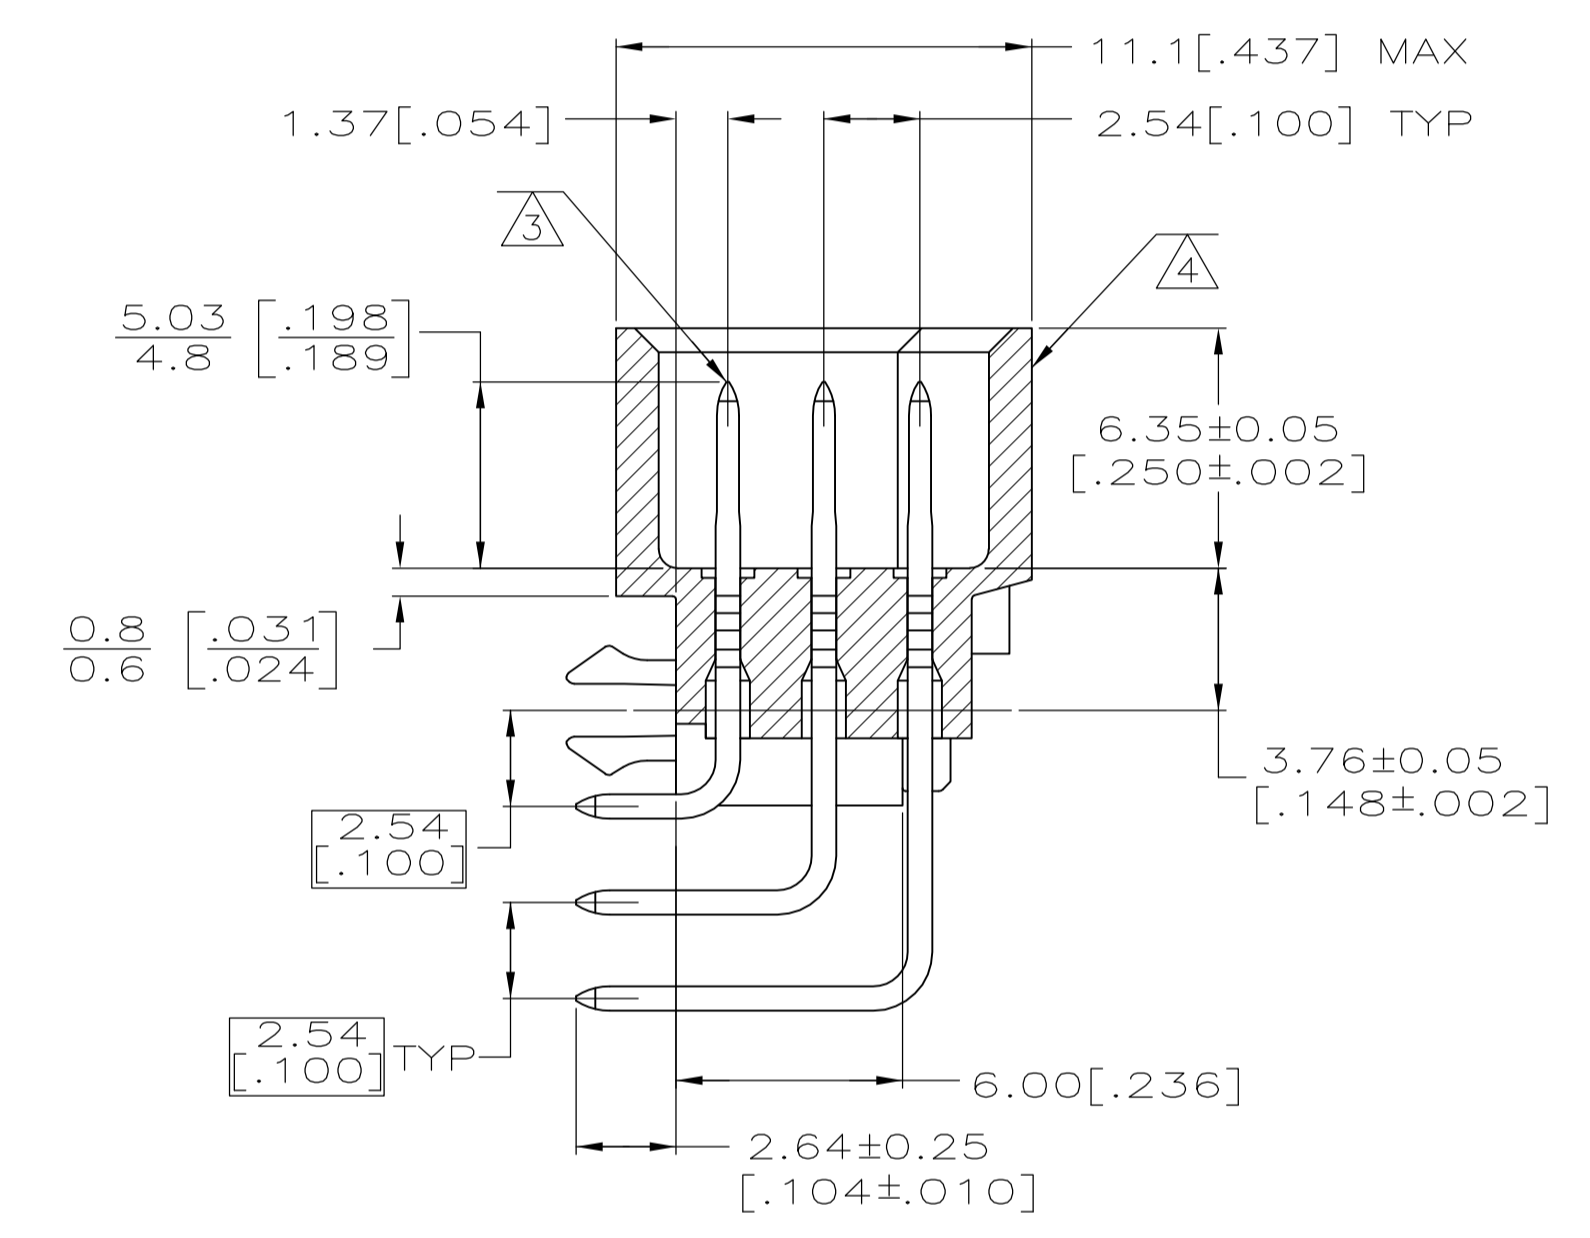



- △ HOUSING MATERIAL: GLASS-FILLED POLYMER.
- △ POST MATERIAL: COPPER ALLOY.
- △ POST FINISH: DIN 41612 CLASS 2 IN CONTACT AREA. TIN PLATING ON POSTS.
- △ MARKING ON THIS SIDE.
- △ RECOMMENDED HOLE SIZE FOR MANUAL APPLICATION OF CONNECTOR ONTO PC BOARD.
- △ PART NUMBER, DATE CODE MARKED THIS APPROXIMATE AREA.

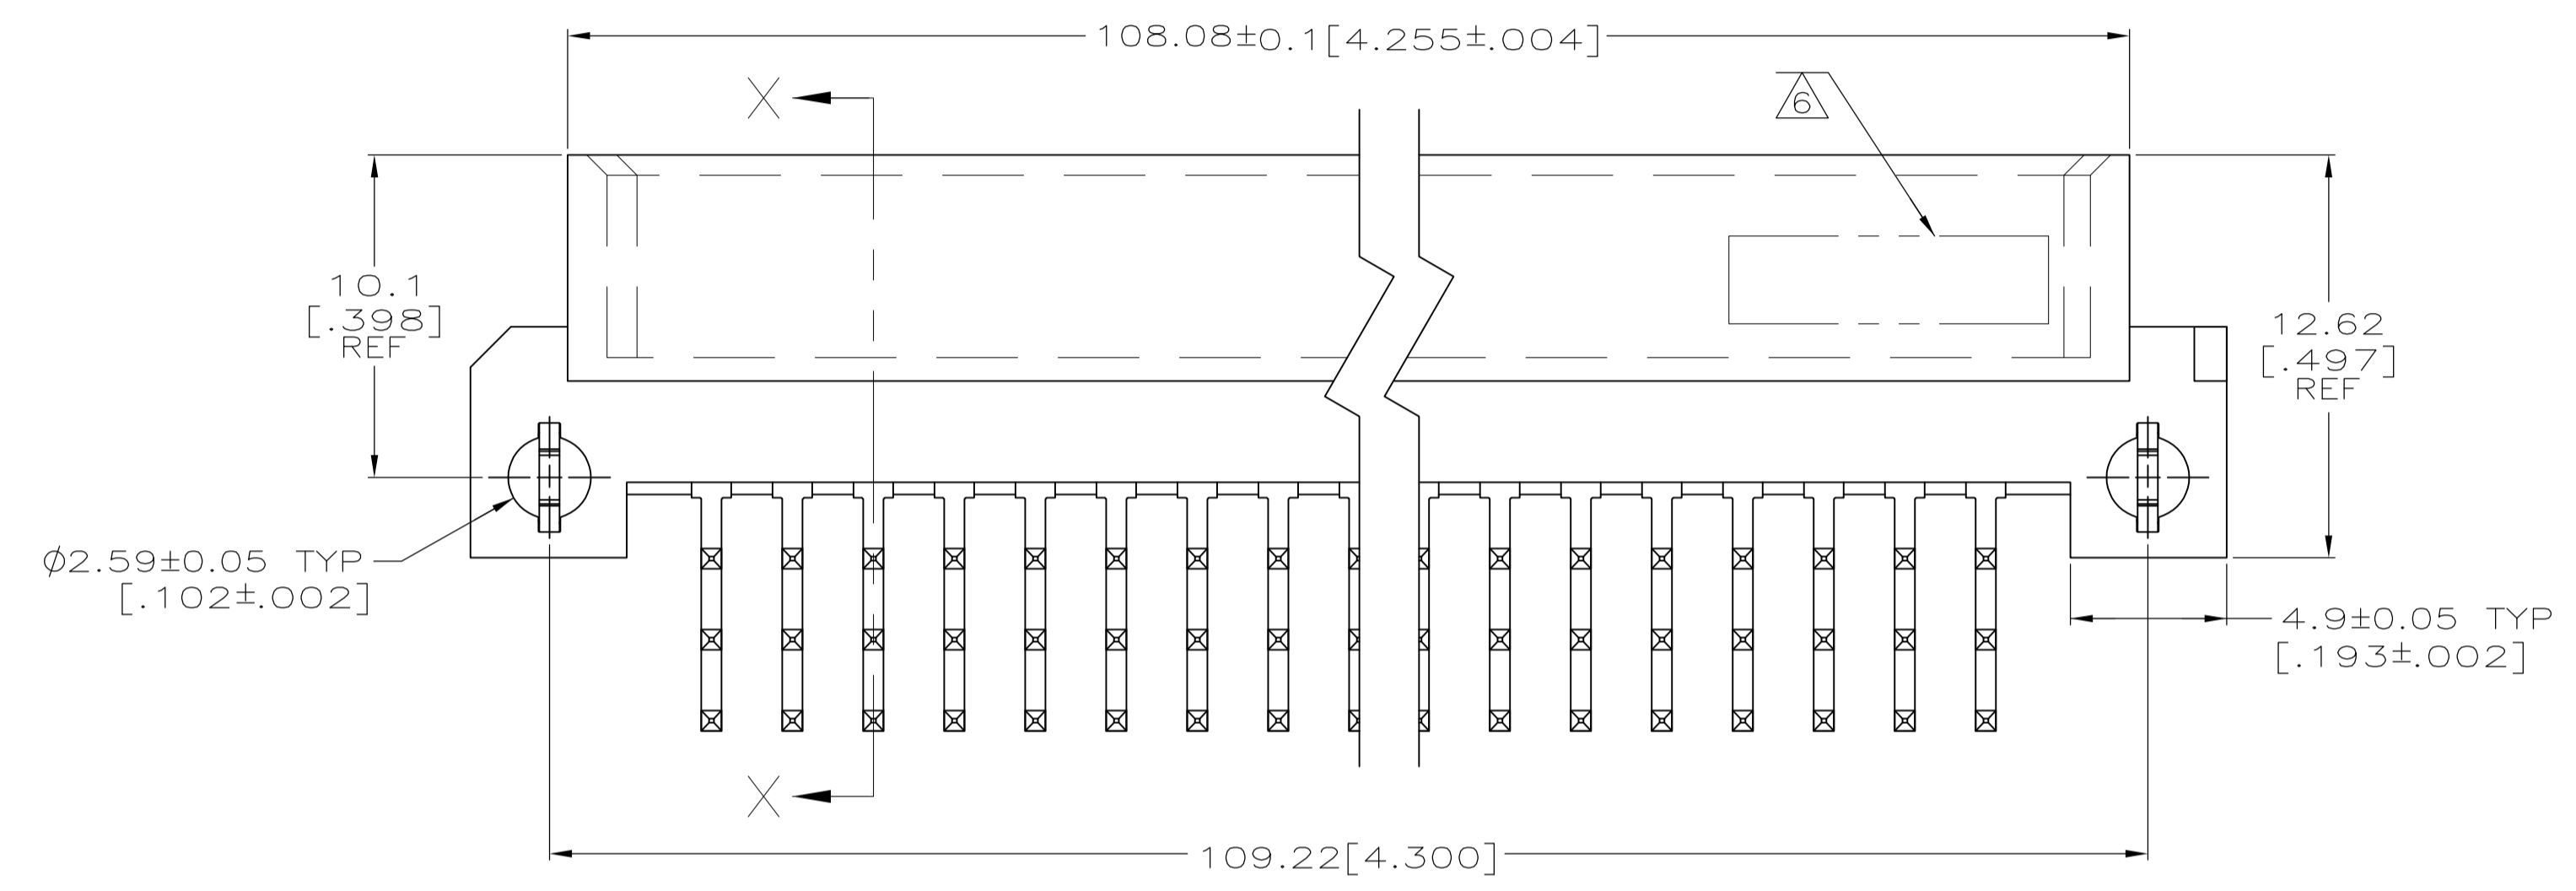

SECTION X-X

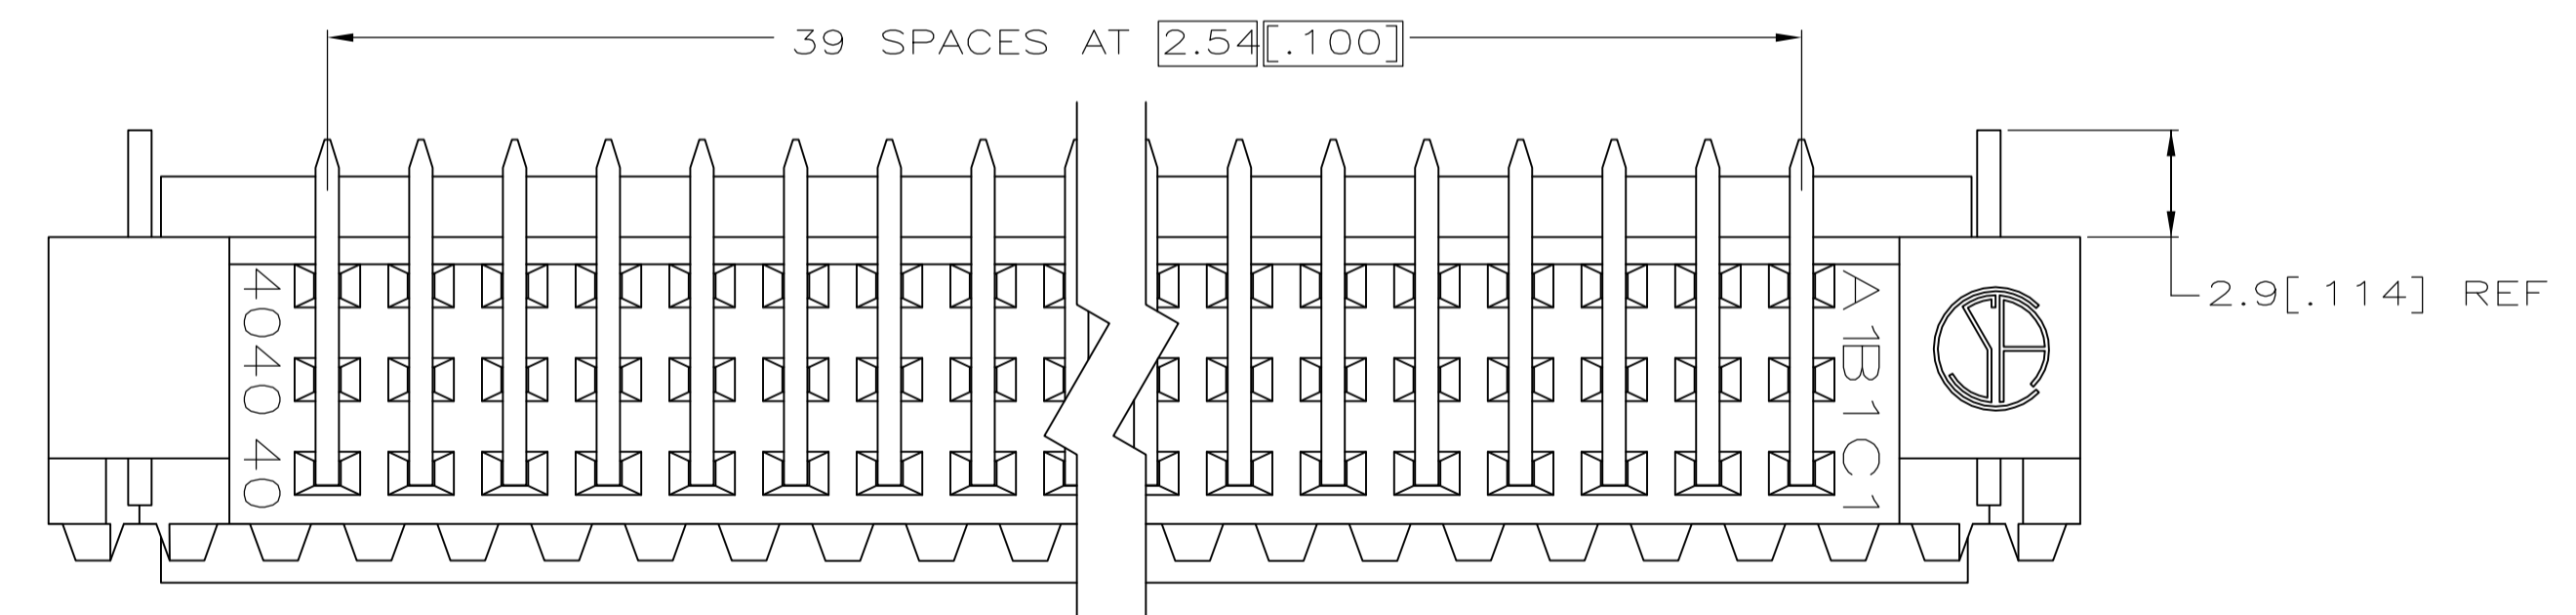

REFERENCE FAMILY DRAWING 650473 FOR ALL TYPE C HEADER OFFERINGS

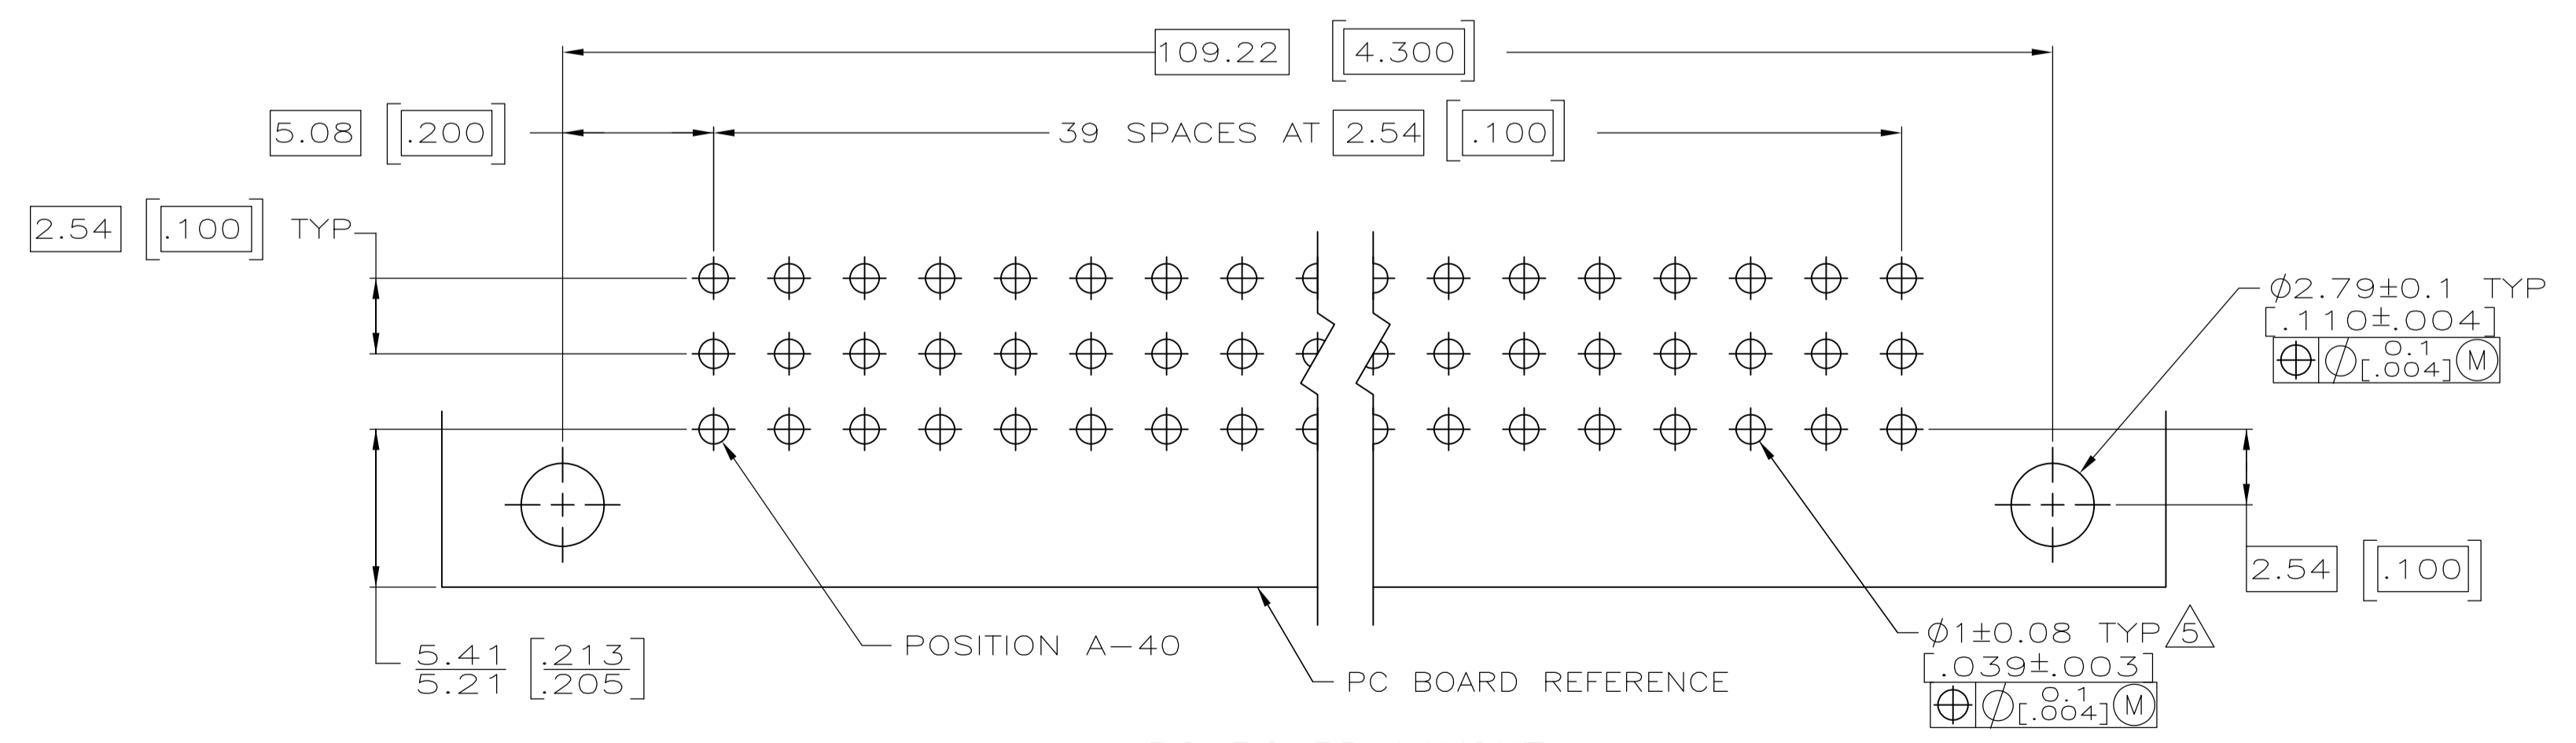

PC BOARD LAYOUT
RECOMMENDED PC BOARD THICKNESS 1.57[.062]

1-40	X	X	X	120	5650914-5
POSITIONS LOADED	C	B	A	NO. OF LOADED POSITION	ASSY PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		BIN J. POLIGNONE		OSMAYOS	
DIMENSIONS: mm [INCHES]		CIK A. SHARPE		OSMAYOS	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A. SHARPE		OSMAYOS	
0 PLC ± -		PRODUCT SPEC		NAME	
1 PLC ± -		APPLICATION SPEC		ASSEMBLY, PIN, EUROCARD, TYPE C, 120 POSITION, 2.64[.104] SOLDER POST, WITH BOARD LOCKS	
2 PLC ± ± 0.13[.005]		SIZE		CASE CODE	
3 PLC ± -		WEIGHT		DRAWING NO	
4 PLC ± -		CUSTOMER DRAWING		A1 00779	
ANGLES ± -		SCALE		SHEET	
FINISH		5:1		1 OF 1	
MATERIAL		REV		A	

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)