

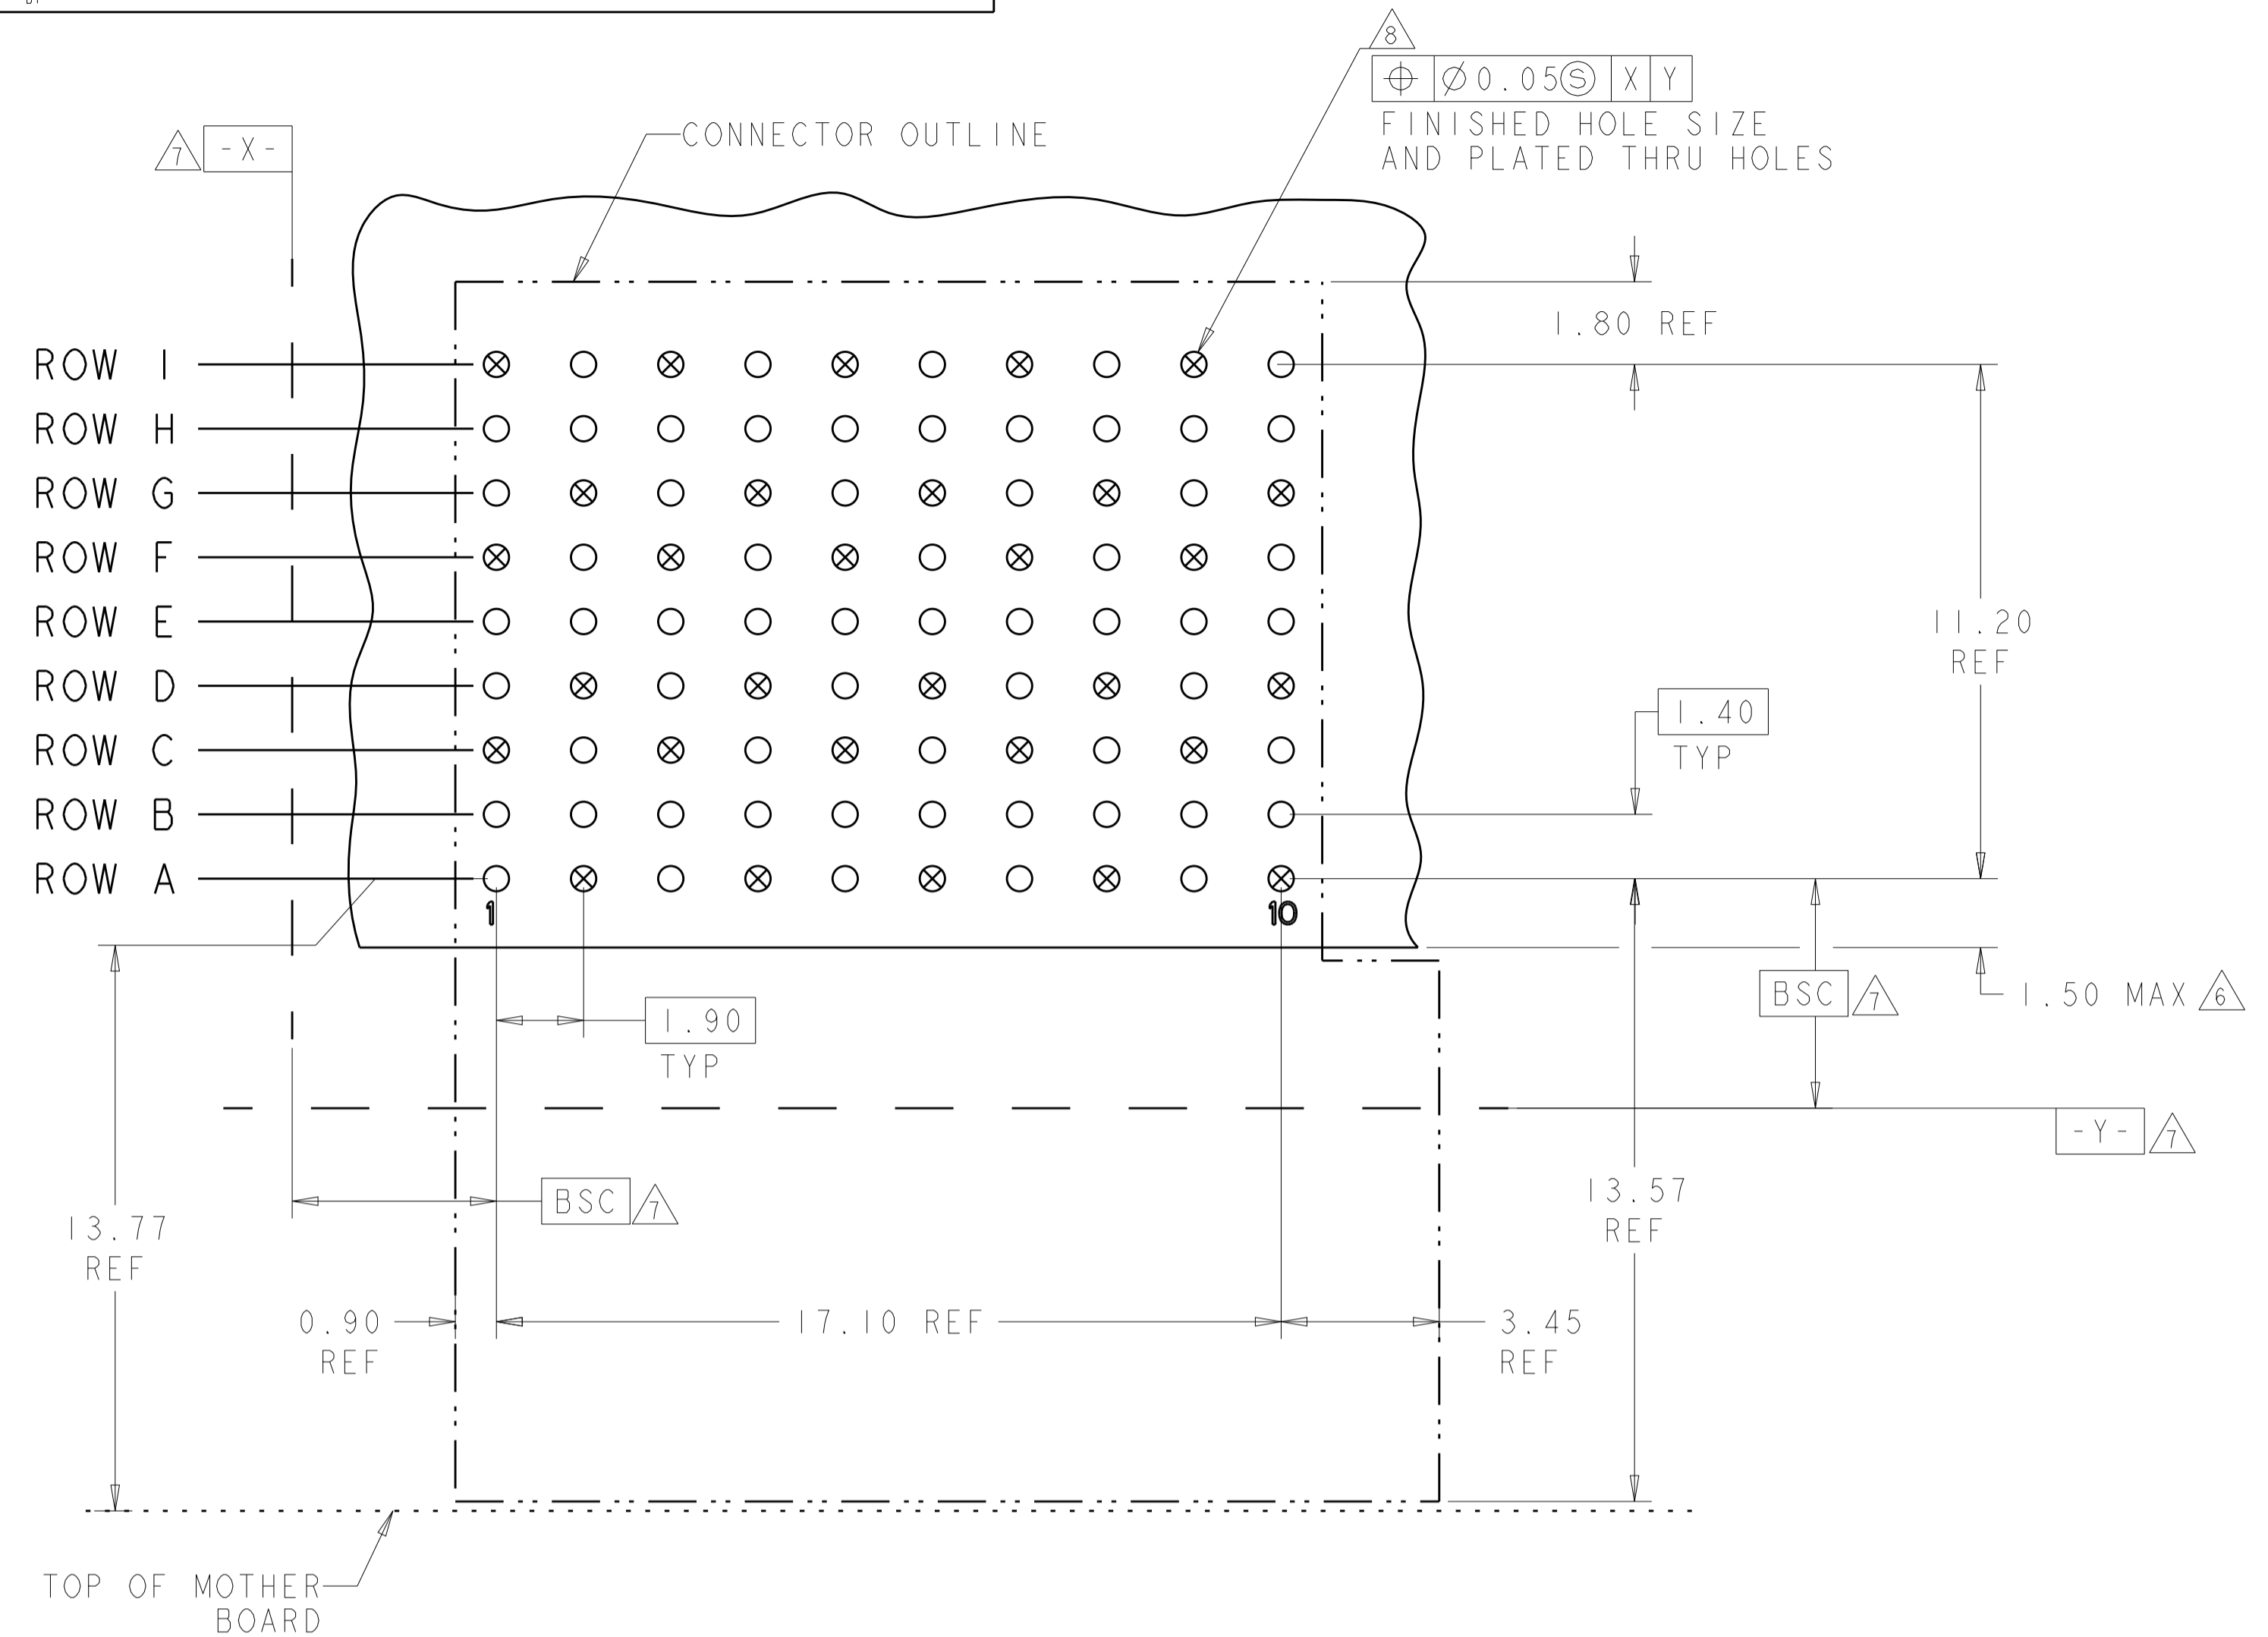


LOC		DIST		REVISIONS			
P	LTN	DESCRIPTION	DATE	DMN	APVD	KG	DH
B		REV PER ECO 12-010940	7-31-12	CT	DH		
C		ECO-13-004755	26MAR2013	KG	DH		
D		ECO-14-017030	25NOV2014	CT	MGM		

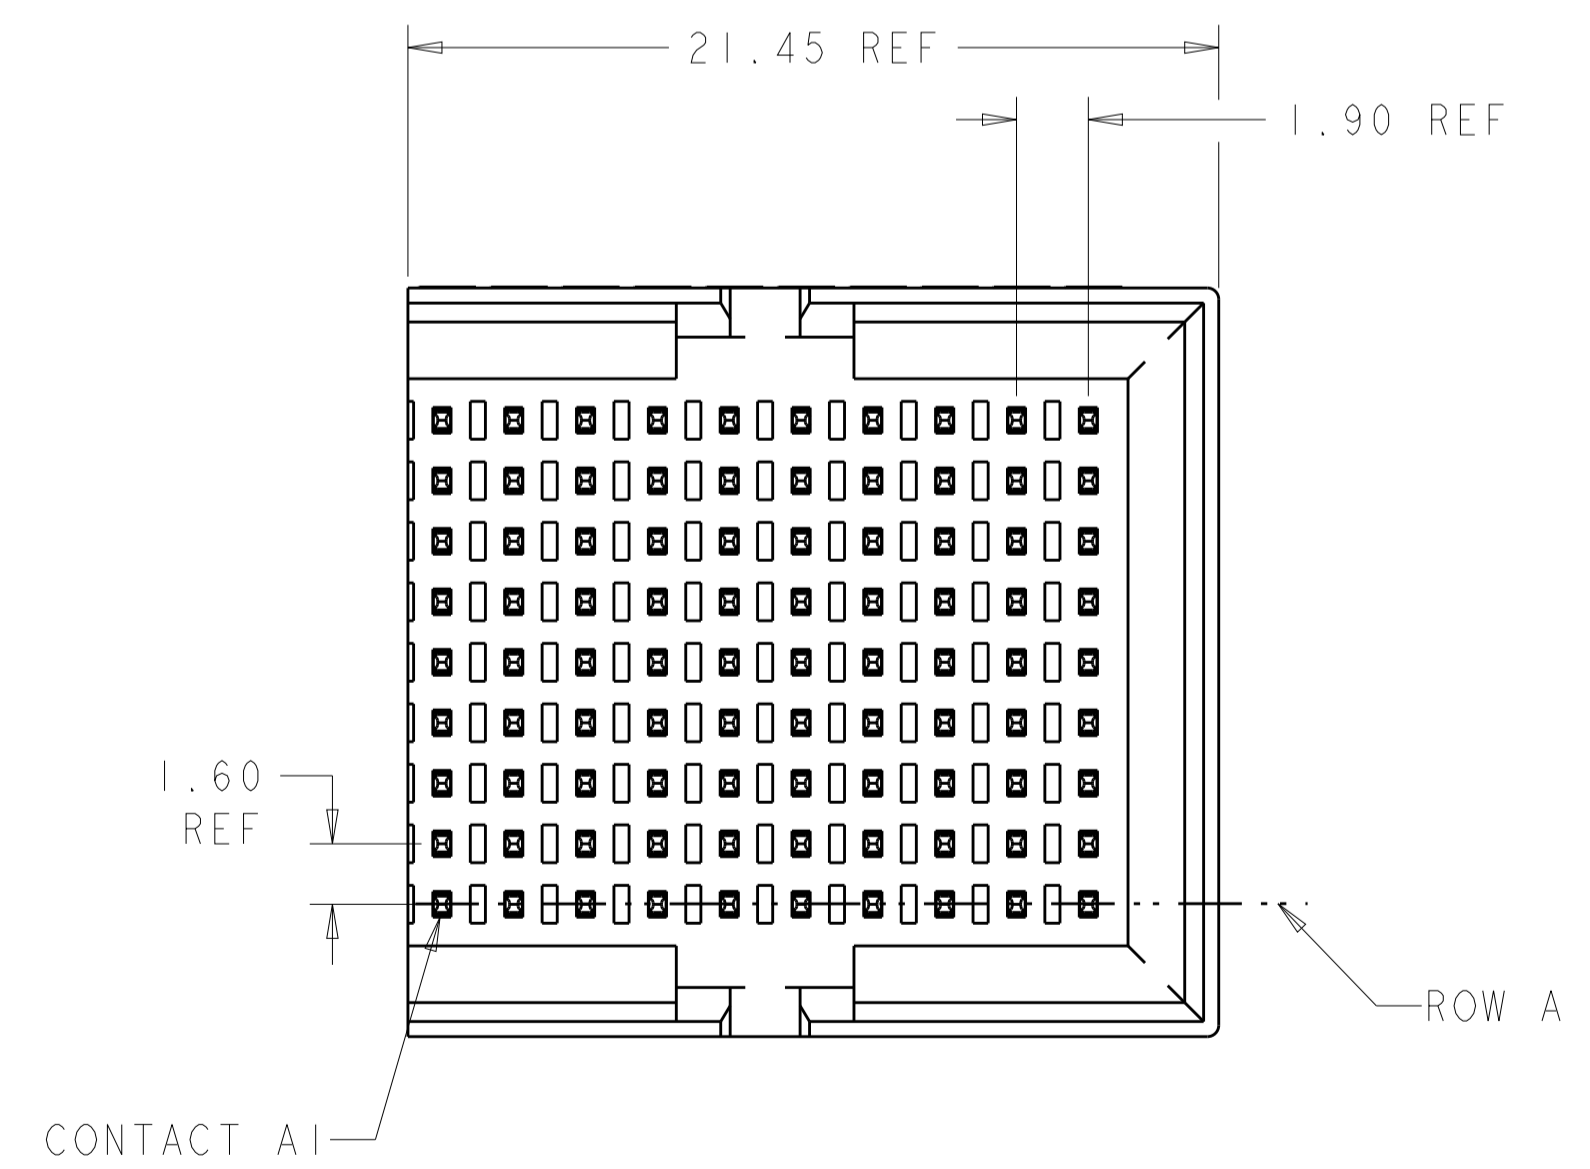

○ = SIGNAL  
 ⊗ = GROUND  
 RECOMMENDED PC BOARD LAYOUT  
 COMPONENT SIDE SHOWN  
 SCALE 8:1

- 1 MATERIAL:  
CONTACT AND SHIELD: COPPER ALLOY  
HOUSING AND CHICKLET: LCP, COLOR: BLACK
- 2 FINISH:  
CONTACT: MATING AREA: 1.27μm MIN GOLD OVER  
1.27μm MIN NICKEL  
SHIELD: 1.27μm MIN NICKEL
- 3 FINISH:  
COMPLIANT PIN AREA: 0.38μm MIN BRIGHT TIN LEAD OVER  
1.27μm MIN NICKEL
- 4 FINISH:  
COMPLIANT PIN AREA: 0.38μm MIN MATTE TIN OVER  
1.27μm MIN NICKEL
- 5 ---
- 6 DIMENSION APPLIES TO CENTERLINE OF THRU HOLE.
- 7 DATUMS AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 8 REFERENCE APPLICATION SPEC 114-13267 FOR RECOMMENDED PLATED THRU HOLE DIAMETER AND PLATING THICKNESS.
- 9 ALL GROUNDS IN ODD NUMBERED COLUMNS ARE COMMONED. ALL GROUNDS IN EVEN NUMBERED COLUMNS, EXCEPT FOR ROW A ARE COMMONED.

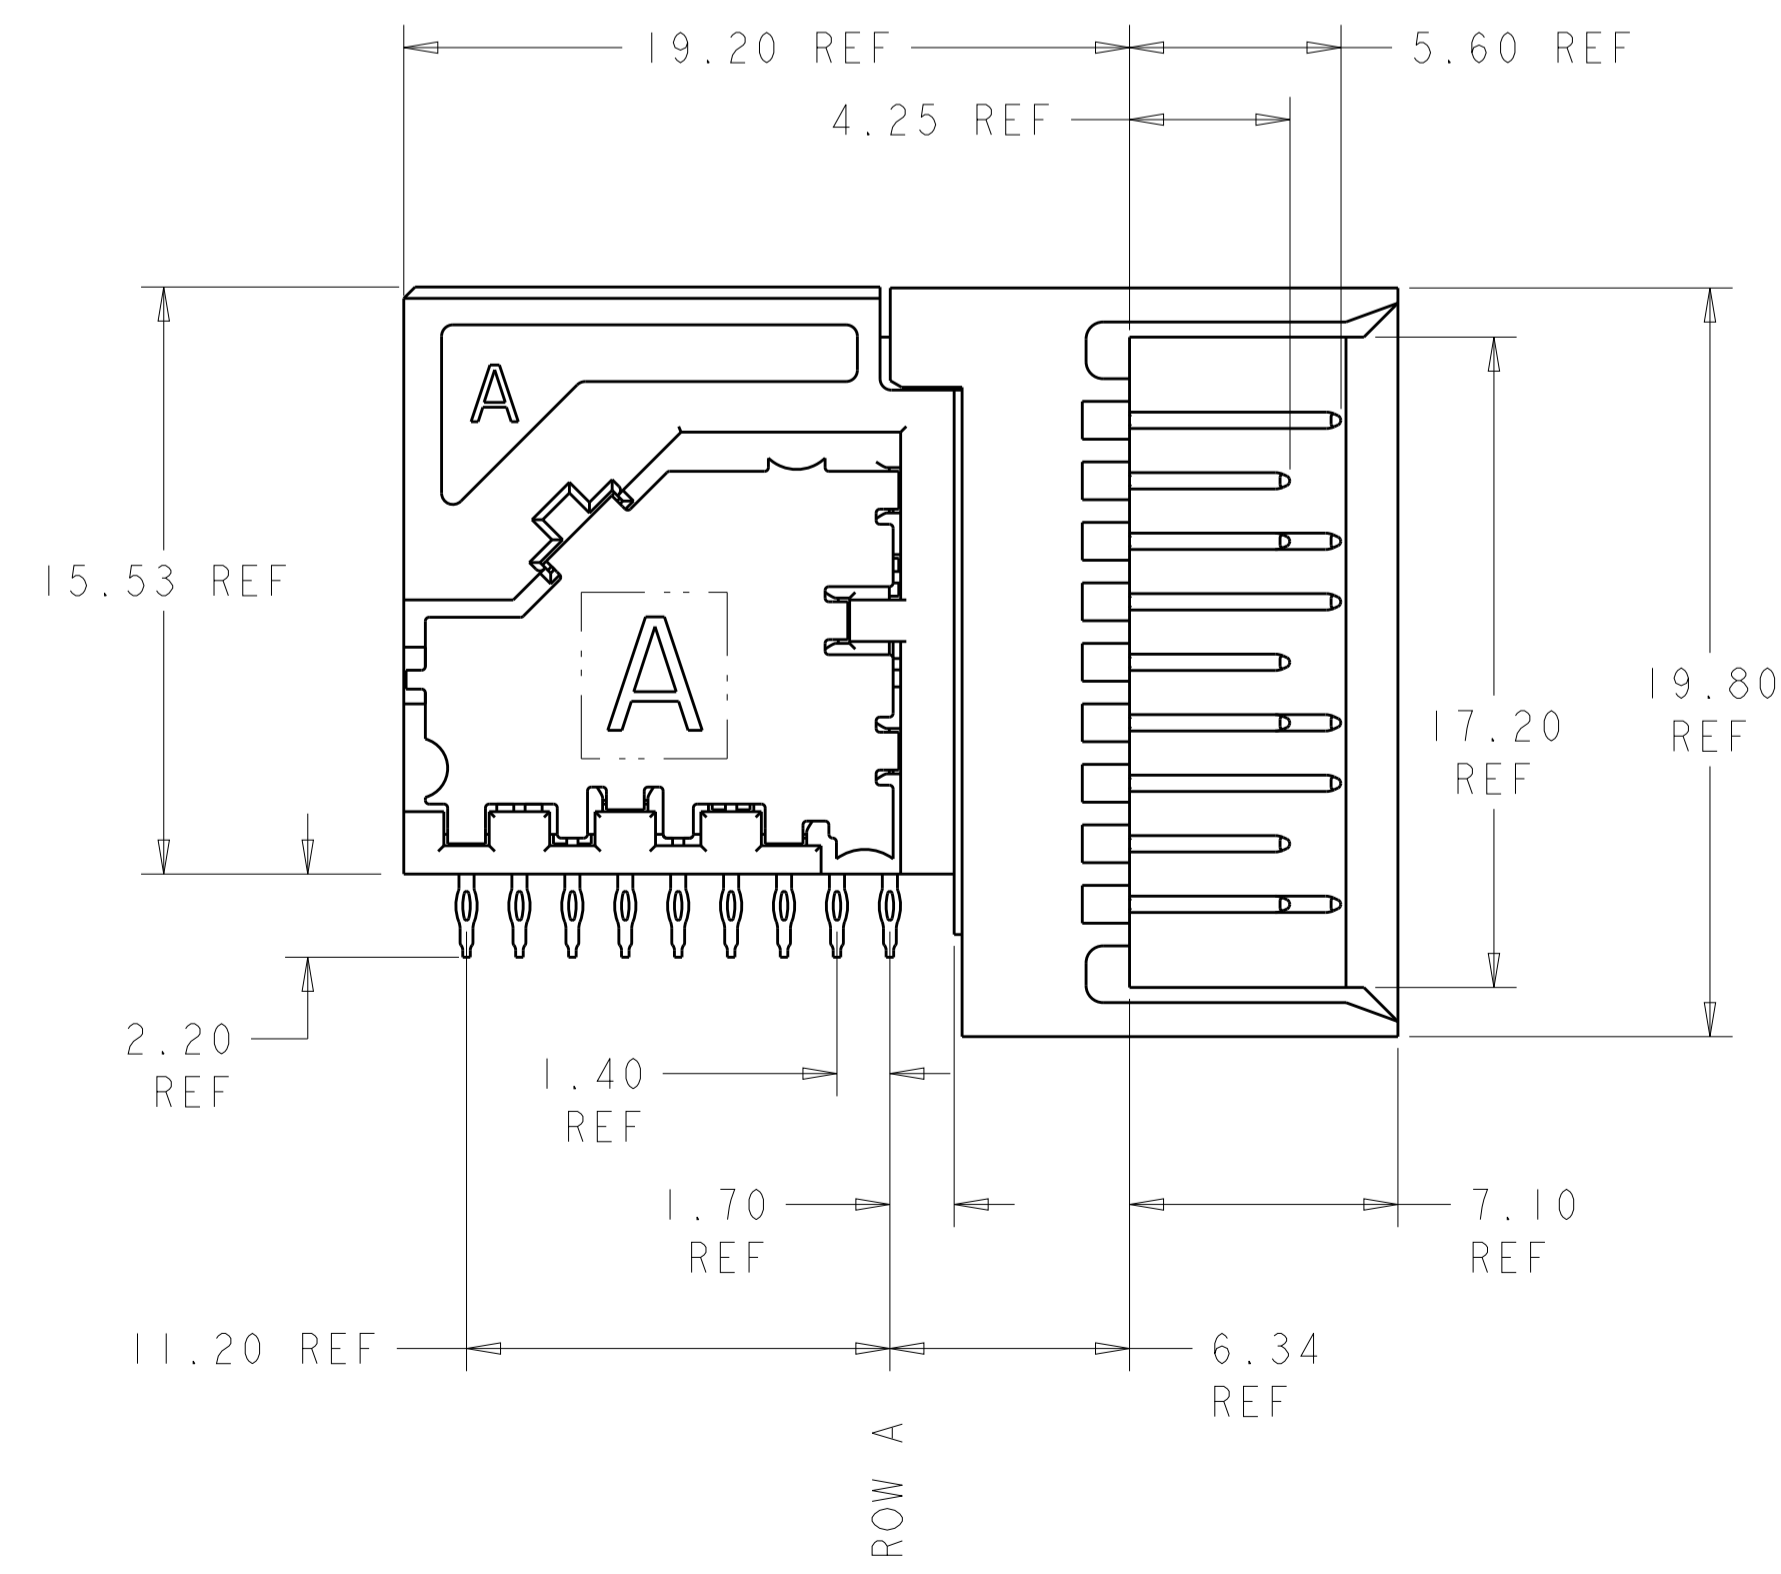

2 4	2000892-2
2 3	2000892-1
FINISH	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER GPS (1:150 STANDARDS). DIMENSIONS: mm. TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±, 1 PLC ±0.13, 2 PLC ±0.05, 3 PLC ±, 4 PLC ±, ANGLES ±.

DMN: D. BELACK, 24JUN2009  
 CHK: A. TSANG, 6-24-2009  
 APVD: M. McALONIS, 6-24-2009

PRODUCT SPEC: 108-2409  
 APPLICATION SPEC: 114-13267  
 WEIGHT: ~13.47g

Customer Drawing

NAME: Fortis Zd, 3-PAIR, 10-COLUMN, RIGHT ANGLE, RIGHT MODULE ASSEMBLY, DIFFERENTIAL PAIR  
 SIZE: A100779  
 CAGE CODE: C=2000892  
 SCALE: 5:1 SHEET 1 OF 1 REV D

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)