



REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
2	REVISED PER ECN#T-5868	4/1-3-86	JB
A	REVISED PER DCR# T-24468	3/23/2000	M.HIGGY

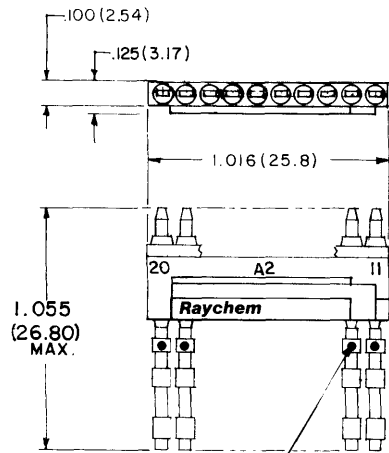

RED COLOR CODE

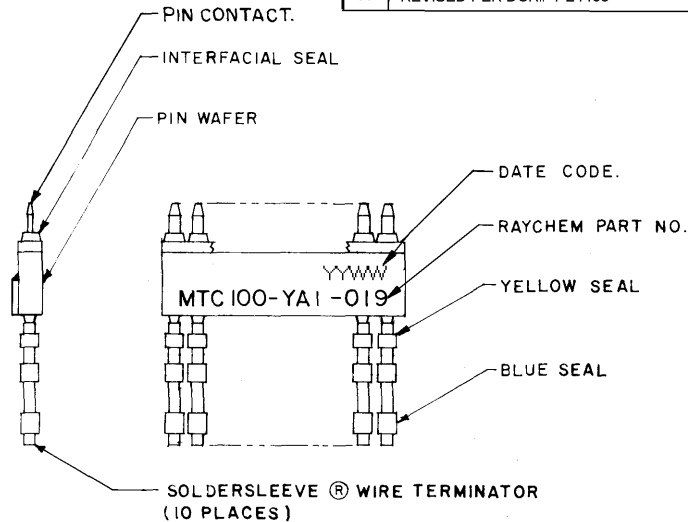

3. THIS PRODUCT IS DESIGNED TO MEET THE REQUIREMENTS OF RAYCHEM SPECIFICATION D-6012. QUALIFICATION IS PENDING.

2. FINISH :
- C. CONTACT TAIL; SOLDER COATED PER QQ-S-571.
  - B. PIN CONTACT ENGAGING AREA; GOLD PLATE PER MIL-G-45204, CLASS I.
  - A. PIN WAFER; FINISH TO BE AS MOLDED.
  - D. INTERFACIAL SEAL; SILICONE ELASTOMER PER ZZ-R-765.
  - C. SOLDERSLLEEVE® WIRE TERMINATOR; REFER TO RAYCHEM DWG. CTA-0068 FOR DATA.
  - B. PIN CONTACT; COPPER ALLOY PER QQ-B-750

1. MATERIAL : A, PIN WAFER INSERT MATERIAL HIGH GRADE POLYARYLENE THERMOPLASTIC.

NOTES :

If this document is printed it becomes uncontrolled.  
Check with the web for latest revision.

## SPECIFICATION CONTROL DRAWING

DRAWN	R.Uchtmann.	10-11-84	<b>Raychem</b>		RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025	
CHECKED	JB					
APPROVED	Blain	10-12-84	TITLE			
APPROVED	San	10-24-84	WAFER "A2" PIN, SPECIAL 1" FOR USE IN MTC 100 2" CONNECTOR, 125°C OPERATING TEMPERATURE, FOR 20-26 AWG ROUND WIRE TERMINATION, OVAL ENTRY. MTC 100 SERIES (P.A.S.S.)			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE IN PARENTHESIS			SIZE	CODE IDENT. NO.	DWG. NO.	
DO NOT SCALE THIS DRAWING			B	06090	MTC 100-YA1-019	A
				CAD FILE:	T24468.TIF	WEIGHT

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)