



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION 14JAN, 2004.
 © COPYRIGHT 2004 By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	ECR-06-021030	22SEP06	AM	FWK
	C1	REVISED PER ECO-10-000444	18JAN10	KK	HMR
	C2	ECR-10-022205	01FEB11	KK	HMR

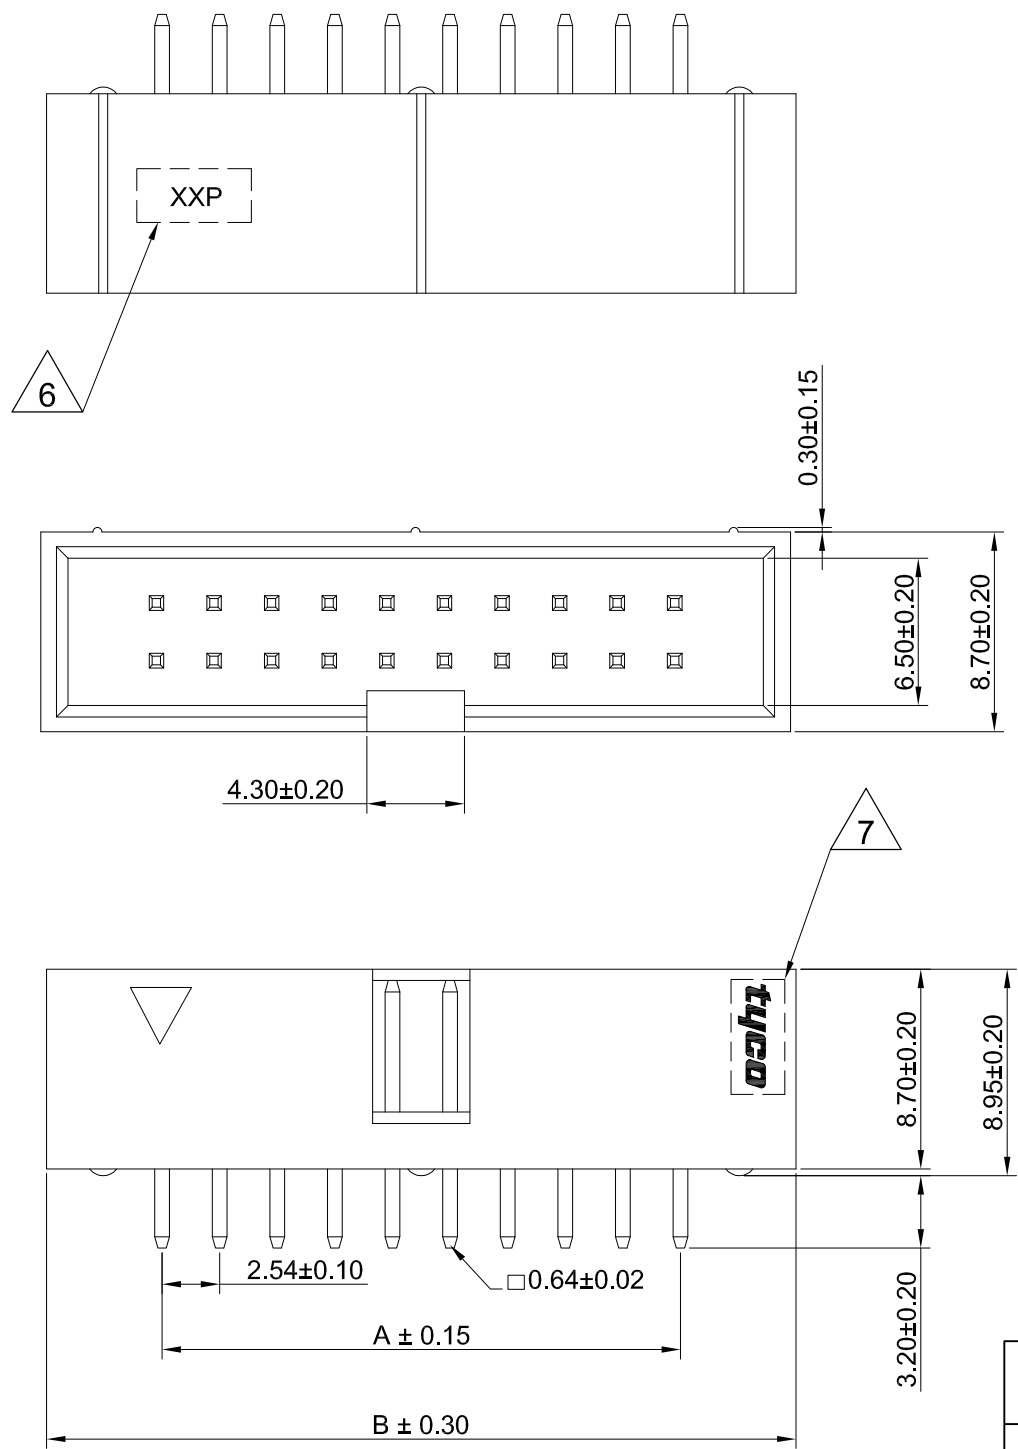

Recommended P.C.Board Hole Layout

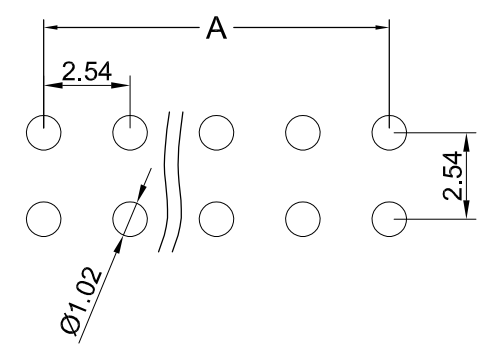

NOTES

- FOR TECHNICAL DATA REFER TO YOUR LOCAL TYCO ELECTRONICS SALES OFFICE.
- ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED.
- RATING
 - 3.1 RATING : 3 AMPS
 - 3.2 OPERATING TEMPERATURE : - 40°C TO +105°C
- ELECTRICAL SPECIFICATION
 - 4.1 INSULATION RESISTANCE 5000 MΩ MINIMUM
 - 4.2 WITHSTAND VOLTAGE 500V AC
- MATERIALS
 - 5.1 CONTACT - BRASS, POST PLATE
 - Au 0.25μm (10μinch) IN CONTACT AREA
 - Sn 2 TO 3μm (80 TO 120μinch) IN SOLDER AREA.
 - 5.2 HOUSING - BLACK NYLON 6T UL 94V-0

- 6 NUMBER OF CONTACT POSITIONS TO BE INDICATED IN AREA SHOWN. XX = NUMBER OF POSITONS.
- 7 TYCO LOGO TO BE PRESENT IN AREA INDICATED.
- 8 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

8	Dimensions	A	B	No Of Contacts	TE Part No
OBSOLETE	78.74	88.93	64	6-1634688-4	
OBSOLETE	73.66	83.85	60	6-1634688-0	
	60.96	71.15	50	5-1634688-0	
	48.26	58.45	40	4-1634688-0	
	40.64	50.83	34	3-1634688-4	
	30.48	40.67	26	2-1634688-6	
	22.86	33.05	20	2-1634688-0	
	17.78	27.97	16	1-1634688-6	
	15.24	25.43	14	1-1634688-4	
	10.16	20.35	10	1-1634688-0	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	A.MOREY	14JAN04
DIMENSIONS: mm		CHK	J.SANDWELL	14JAN04
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	F.WHEELER-KING	14JAN04
0 PLC	± -	NAME		
1 PLC	± -	PRODUCT SPEC		
2 PLC	± 0.2	APPLICATION SPEC		
3 PLC	± -	SIZE	A3	CAGE CODE
4 PLC	± -	DRAWING NO	C-1634688	RESTRICTED TO
ANGLES	± 3'	SCALE NTS		
MATERIAL	FINISH	SHEET 1 OF 1		
-		REV C2		

OBsolete TE Connectivity
 BOX HEADER STRAIGHT
 NOT the LATEST REVISION

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)