

REV. 0


DCO 144086

COIL: @ 25°C	
RESISTANCE	675 OHMS ±10%
NOMINAL VOLTAGE	26.5 VDC
MUST OPERATE	13.5 VDC
MUST RELEASE	1.47 VDC

ENVIRONMENT:	
VIBRATION	10 Hz TO 2000 Hz @ 20 g's
SHOCK	100 g's 6 ±1 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES: OPERATE & RELEASE 5 MS MAX.  
CONTACT BOUNCE 2 MS MAX.

CUSTOMER DATA SHEET

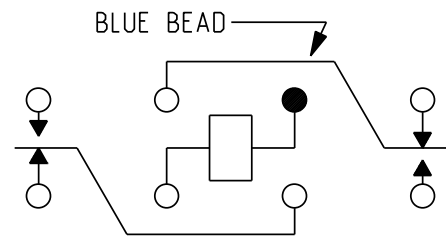

TERMINAL VIEW

CONTACT RATING: 3 AMPS 28 VDC  
RESISTIVE 100,000 OPERATIONS

DR. B.D. 23AUG2005

CK. JMB 8/23/05

**CII Technologies**  
advanced control electronic solutions

CUST. CII STD.  
CUST. NO. REV.

"FW" RELAY

FW 1205G00

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)