
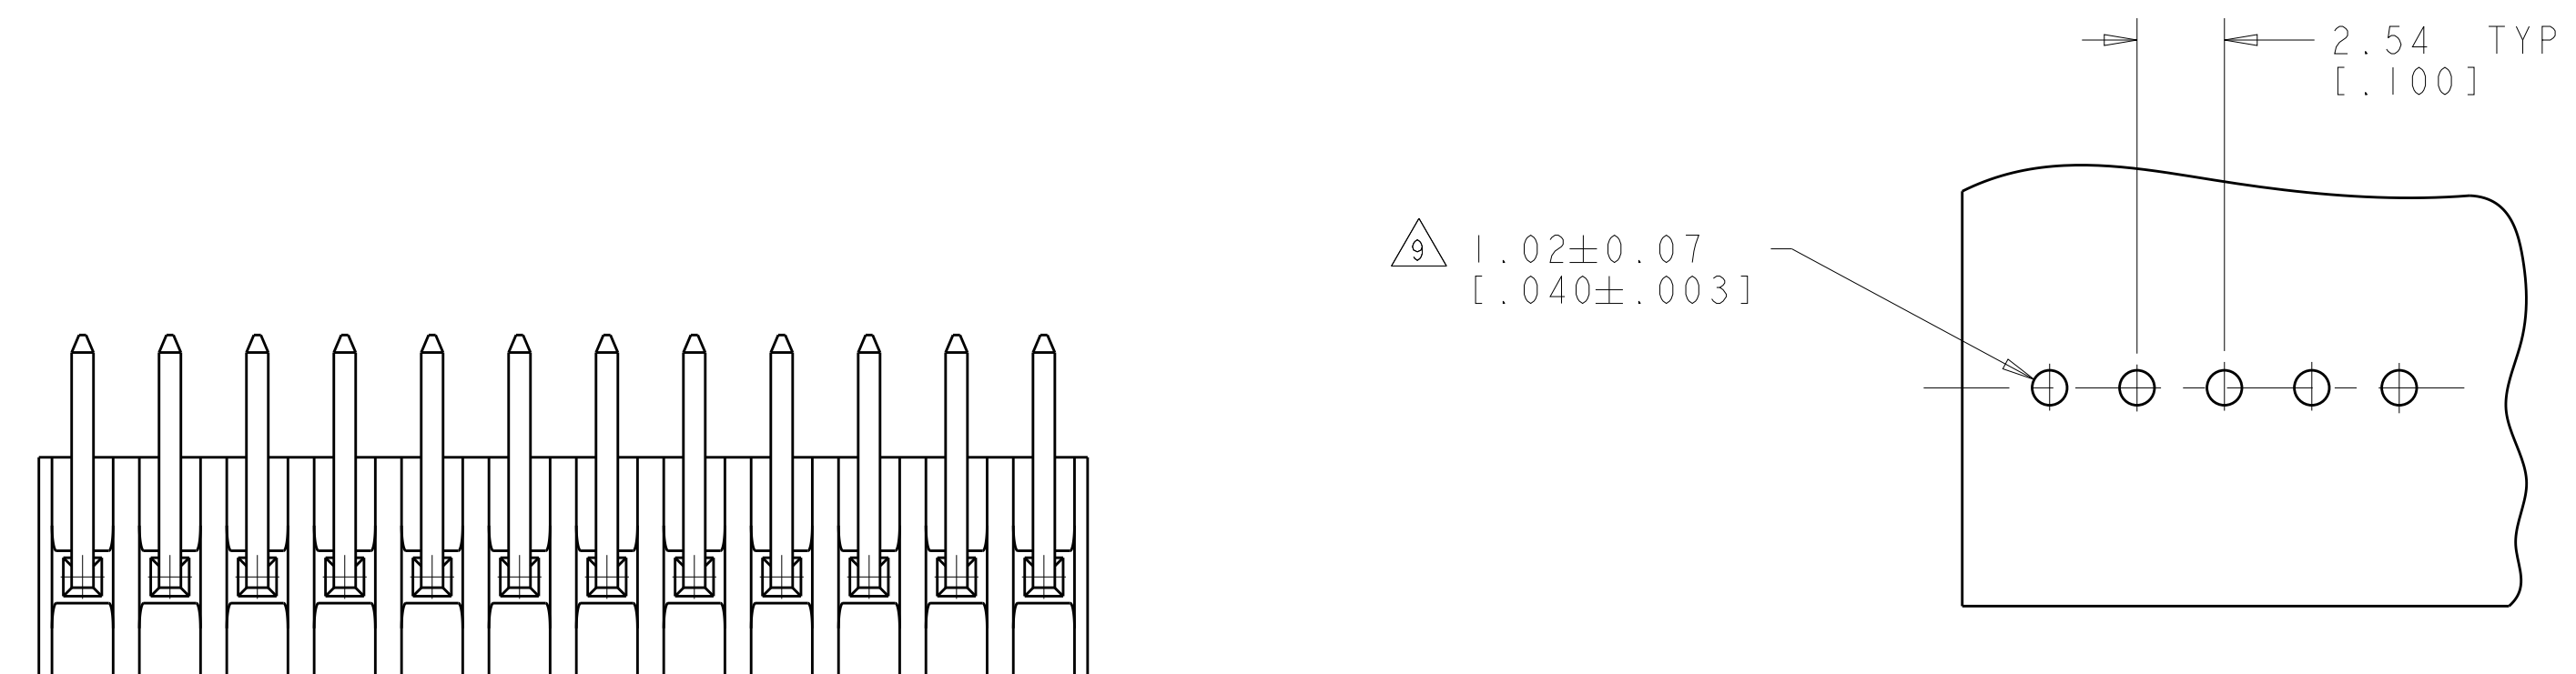
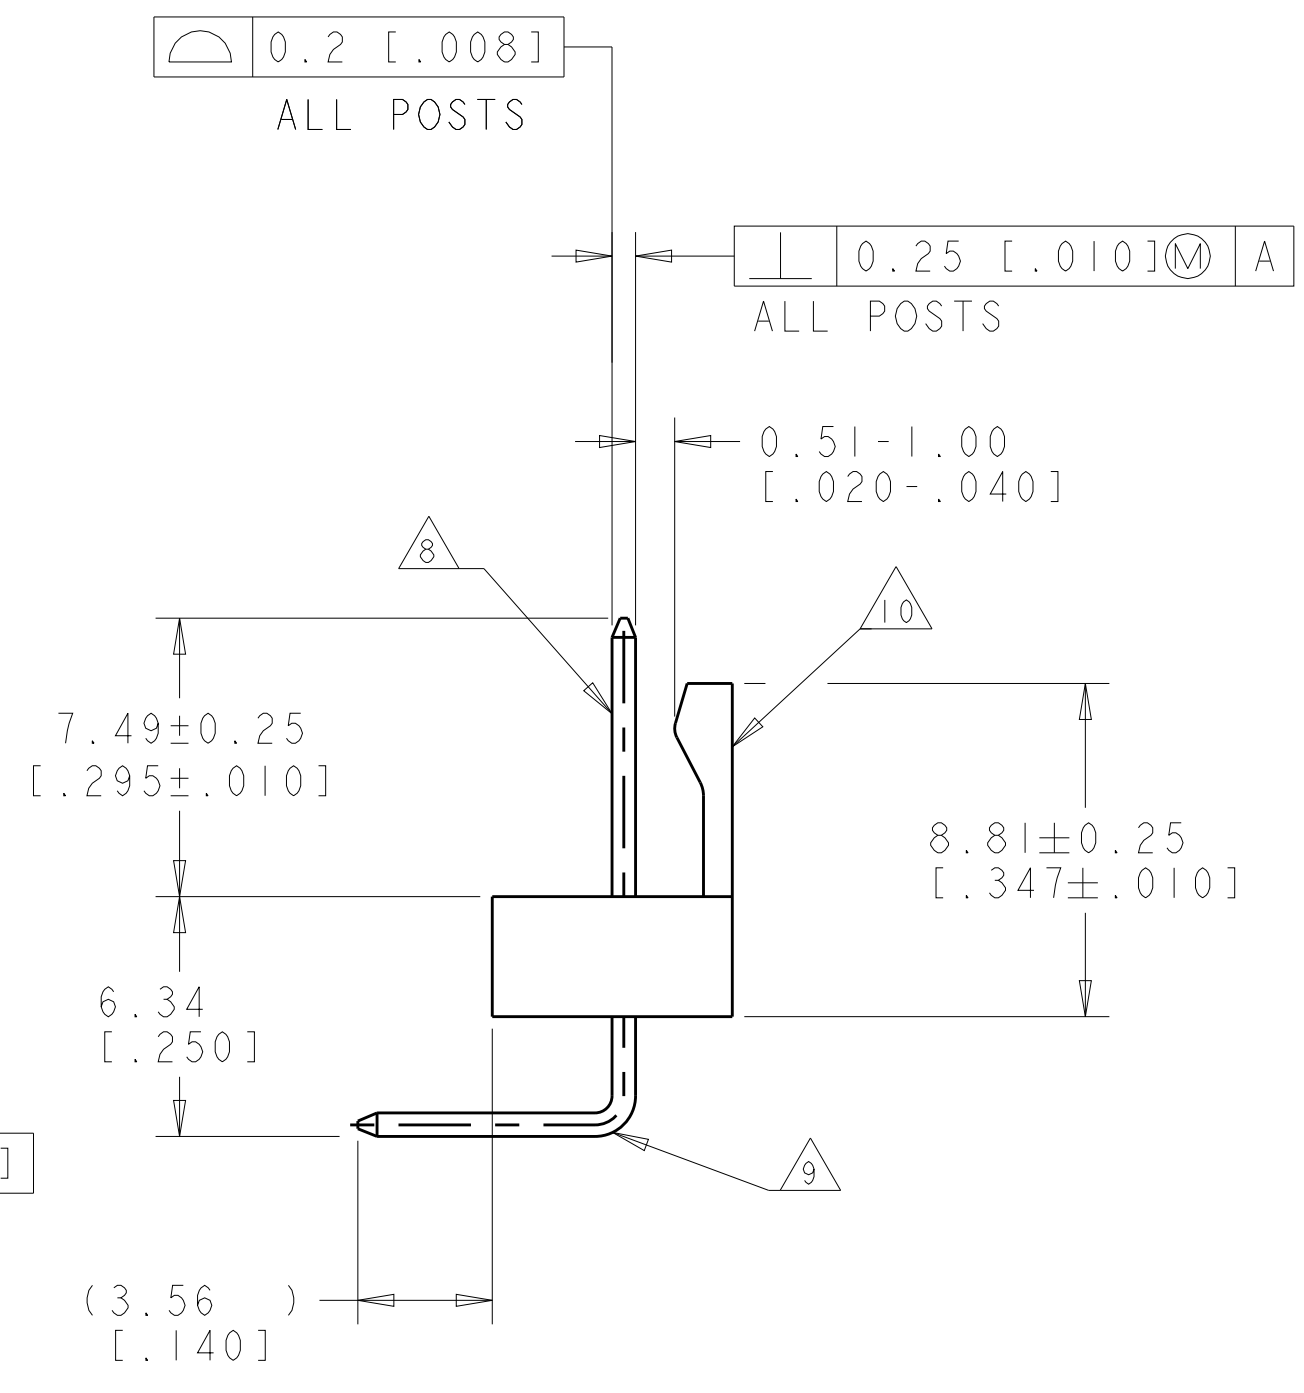
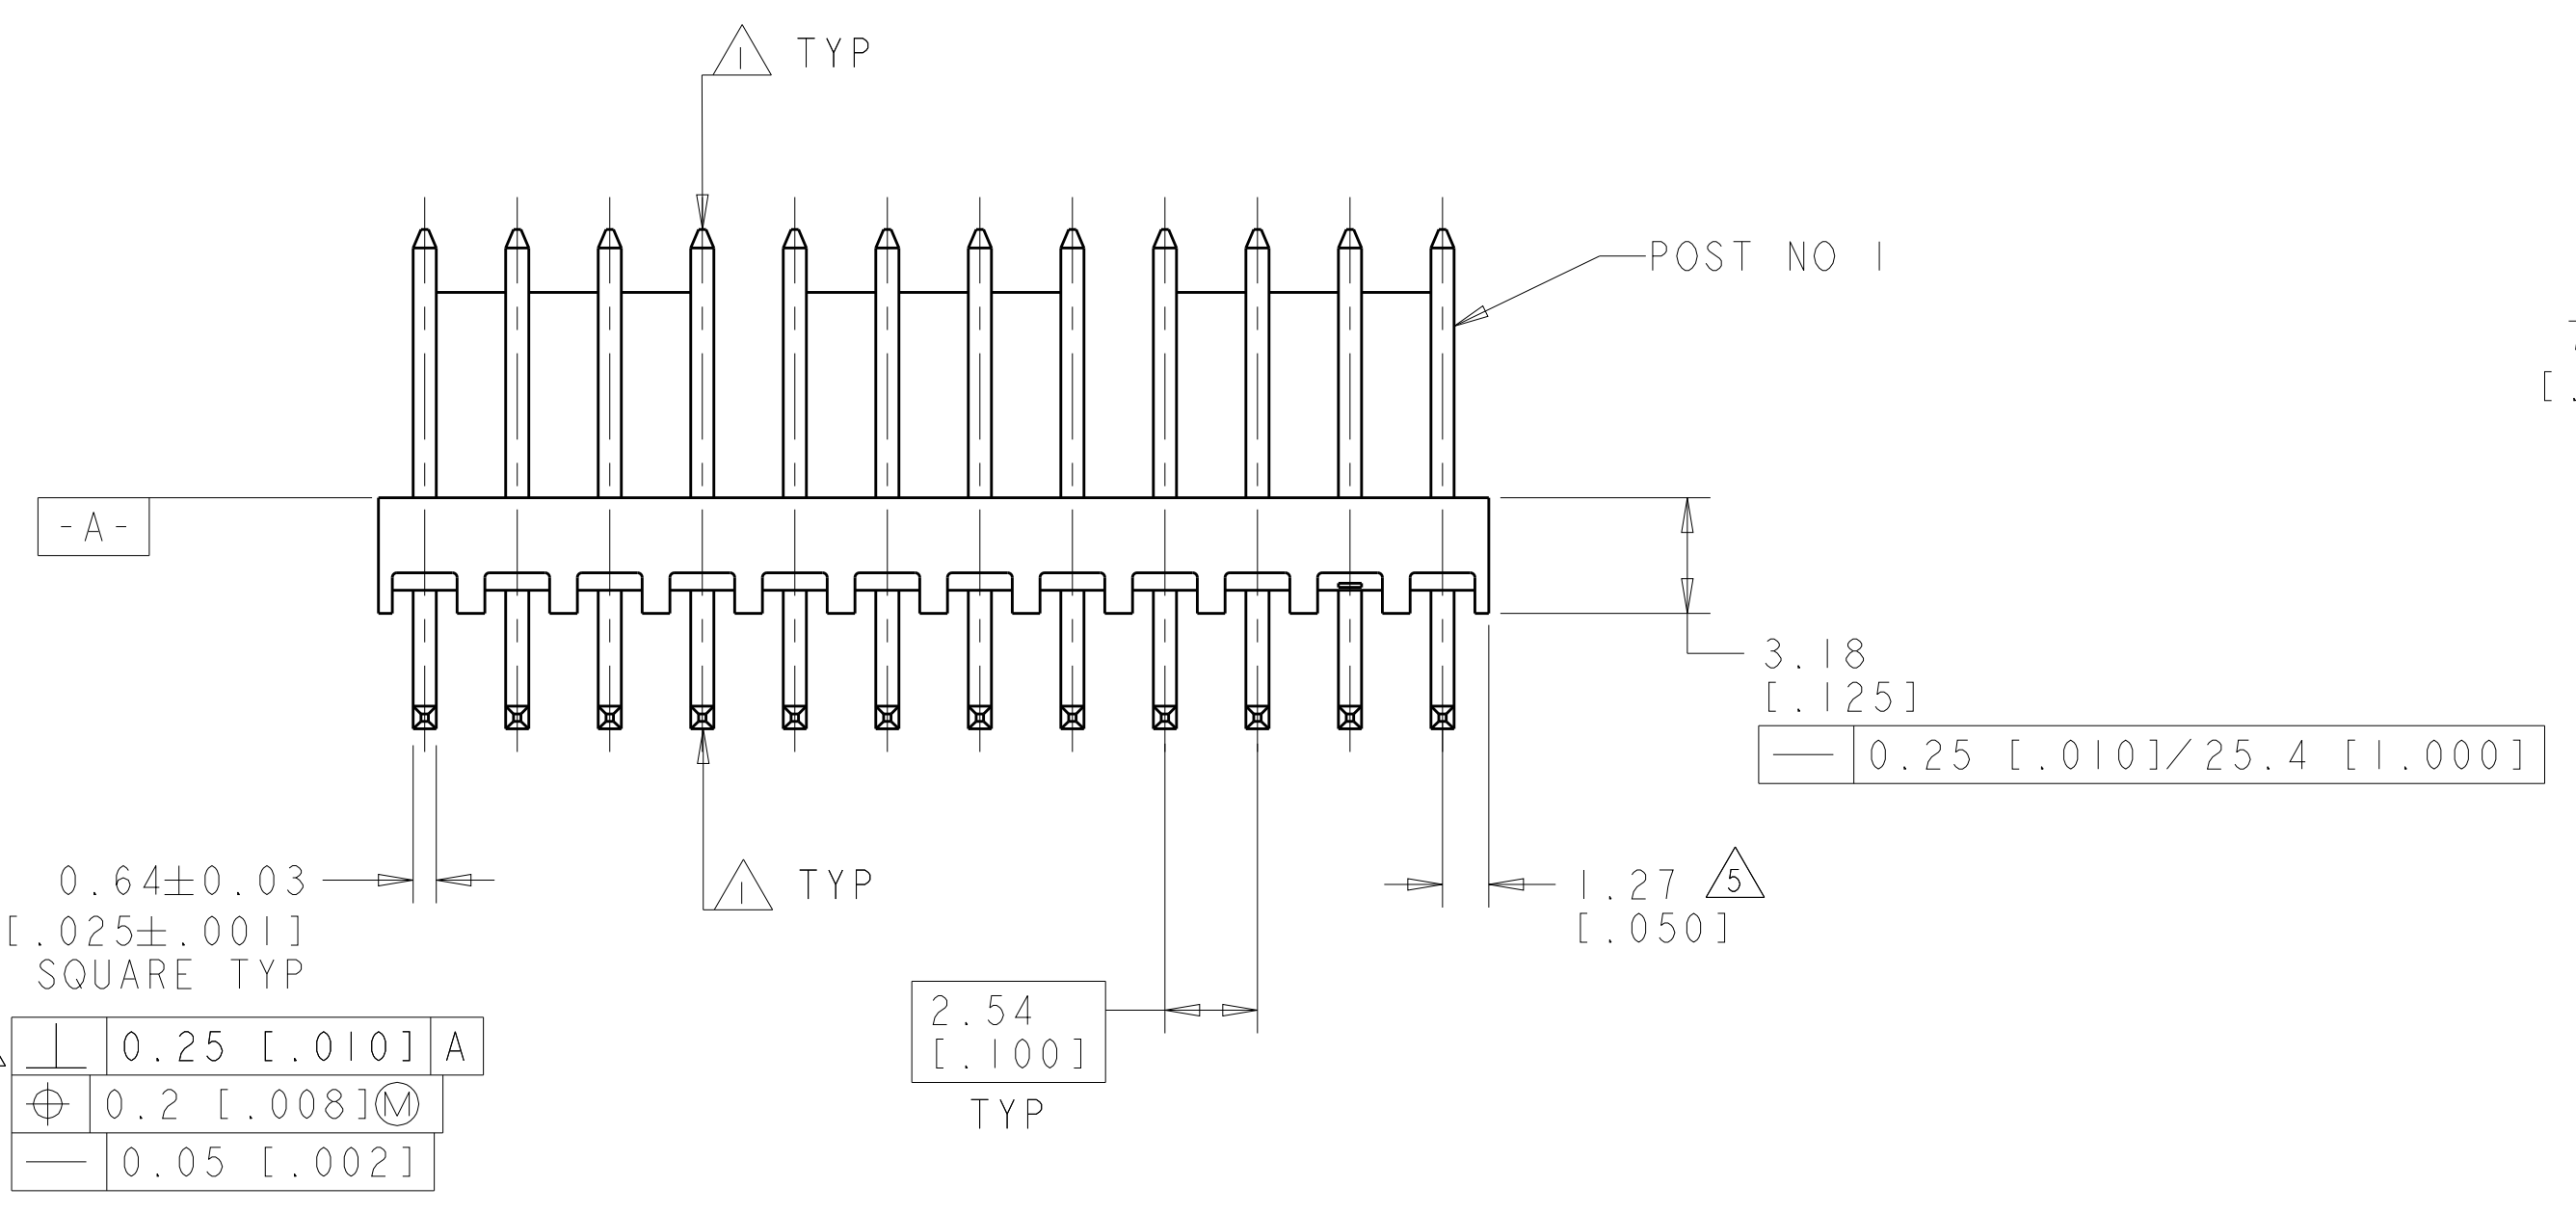


| LOC | | DIST | | REVISIONS | | | |
|-----|----|------|-----|---------------------------|-----------|-----|------|
| CM | 00 | P | LTN | DESCRIPTION | DATE | DWN | APVD |
| | | D1 | | REVISED PER ECR-15-007038 | 29SEP2015 | NK | PQ |
| | | D2 | | REVISED PER ECR-18-004355 | 19JUN2018 | BDA | SG |
| | | E | | REVISED PER ECR-19-015071 | 15OCT2019 | BDA | SW |

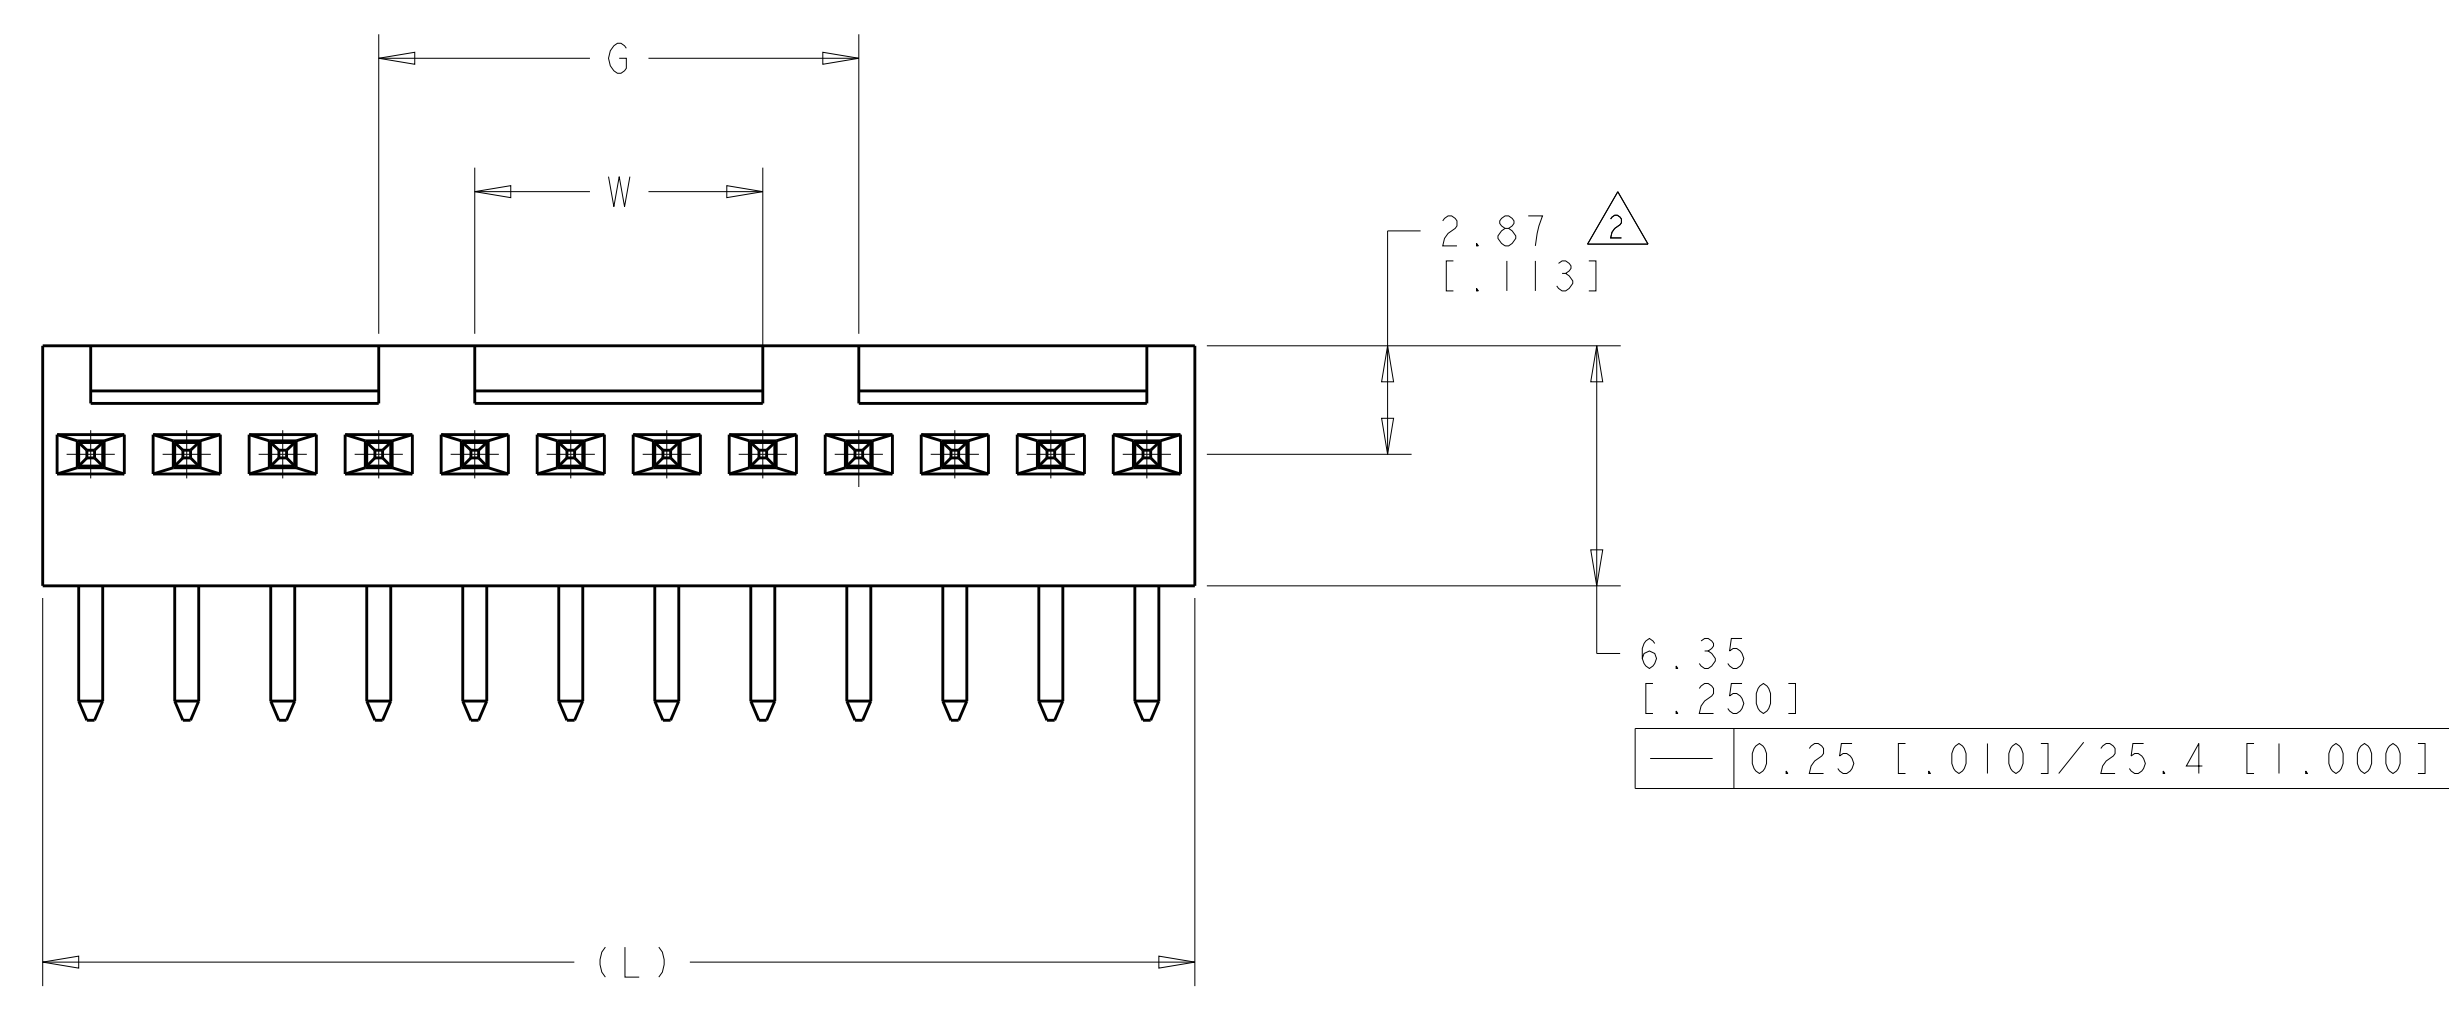

- △ POST WITHSTAND 13 NEWTONS (3 LBS) MIN AXIAL FORCE IN DIRECTION SHOWN WITHOUT DISLODGING.
- △ MEASURED AT -A-.
- 3. PARTS COMPLY WITH SOLDERABILITY SPEC 109-11-2/12.
- △ MATERIAL: HEADER - PBT, GLASS FILLED.
POST - COPPER ALLOY
PLATING: -2 THRU -12 (93/7) TIN-LEAD PLATED.
-32 THRU -42 MATTE 100% TIN PLATED
- △ COORDINATE DIMENSION APPLIES FROM CENTER OF ACTUAL FEATURE.
- △ POSTS TO BE MEASURED WHEN STRIP HELD FLAT.
- 7. DIMENSIONS IN BRACKETS ARE IN INCHES.
- △ TOLERANCES APPLY TO SOLDER SIDE OF BOARD.
- △ ONE HOLE MAY BE UNDERSIZED 0.81-0.90 [0.032-0.035] DIAMETER FOR ASSEMBLY RETENTION DURING PROCESSING.
- △ AMP LOGO, UL, AND CSA TRADEMARKS TO APPEAR ON THIS SURFACE.

| | | | | |
|--------------|---------------|---------------|----|------------|
| 7.62 [0.300] | 12.70 [0.500] | 30.48 [1.200] | 12 | 4-647630-2 |
| - | 10.16 [0.400] | 27.94 [1.100] | 11 | 4-647630-1 |
| - | 7.62 [0.300] | 25.40 [1.000] | 10 | 4-647630-0 |
| - | 5.08 [0.200] | 22.86 [0.900] | 9 | 3-647630-9 |
| - | 2.54 [0.100] | 20.32 [0.800] | 8 | 3-647630-8 |
| - | - | 17.78 [0.700] | 7 | 3-647630-7 |
| - | - | 15.24 [0.600] | 6 | 3-647630-6 |
| - | - | 12.70 [0.500] | 5 | 3-647630-5 |
| - | - | 10.16 [0.400] | 4 | 3-647630-4 |
| - | - | 7.62 [0.300] | 3 | 3-647630-3 |
| - | - | 5.08 [0.200] | 2 | 3-647630-2 |

| | | | | | |
|--------------------------|--------------|---------------|---------------|----|------------|
| SUPERSEDED BY 4-647630-2 | 7.62 [0.300] | 12.70 [0.500] | 30.48 [1.200] | 12 | 1-647630-2 |
| SUPERSEDED BY 4-647630-1 | - | 10.16 [0.400] | 27.94 [1.100] | 11 | 1-647630-1 |
| SUPERSEDED BY 4-647630-0 | - | 7.62 [0.300] | 25.40 [1.000] | 10 | 1-647630-0 |
| SUPERSEDED BY 3-647630-9 | - | 5.08 [0.200] | 22.86 [0.900] | 9 | 647630-9 |
| SUPERSEDED BY 3-647630-8 | - | 2.54 [0.100] | 20.32 [0.800] | 8 | 647630-8 |
| SUPERSEDED BY 3-647630-7 | - | - | 17.78 [0.700] | 7 | 647630-7 |
| OBSOLETE | - | - | 15.24 [0.600] | 6 | 647630-6 |
| OBSOLETE | - | - | 12.70 [0.500] | 5 | 647630-5 |
| OBSOLETE | - | - | 10.16 [0.400] | 4 | 647630-4 |
| OBSOLETE | - | - | 7.62 [0.300] | 3 | 647630-3 |
| SUPERSEDED BY 3-647630-2 | - | - | 5.08 [0.200] | 2 | 647630-2 |

| W | G | L | NO OF POSN | PART NO |
|--|---|--|------------|---------|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | | | |
| DIMENSIONS: mm [INCHES] | | TOLERANCES UNLESS OTHERWISE SPECIFIED: | | |
| 0 PLC ± | | 1 PLC ± | | |
| 2 PLC ± | | 3 PLC ± | | |
| 4 PLC ± | | ANGLES ± 30° | | |
| MATERIAL | | FINISH | | |
| WEIGHT | | CAGE CODE DRAWING NO | | |
| Customer Drawing | | A100779C= 647630 | | |
| SCALE 5:1 | | SHEET 1 OF 1 REV E | | |

RECOMMENDED MOUNTING HOLE PATTERN △
 FOR 1.57±0.20 [0.062±0.008] THICK P.C. BOARD

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)