

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


,19 .

© COPYRIGHT 19

BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
G	14				
	D	REDRAWN PER 0720-0377-94	25OCT94	LO	ME

△ STAMP AMP 16-14 APPROX AS SHOWN

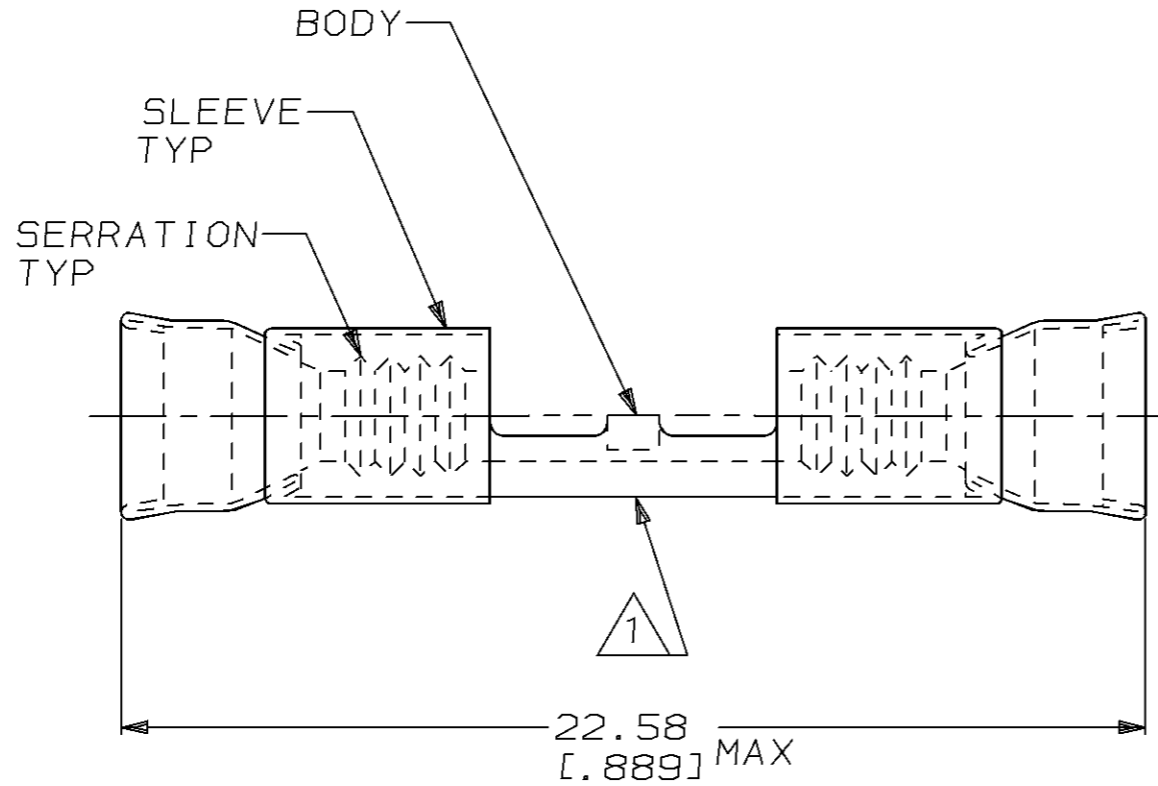

- 2. WIRE INSUL DIA, 3.05-4.32 [0.120-0.170]
- 3. TONGUE MATL THK, 0.79±0.05 [0.031±0.002]

CHROMEL	GRAY	500	LOOSE PIECE	1-322346-1
ALUMEL	GREEN	500	LOOSE PIECE	1-322346-0
NICKEL PER ASTM B162	ORANGE	1000	LOOSE PIECE	322346
BODY MATERIAL	SLV COLOR	QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEM	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE: 649°C [1200°F]
VOLTAGE RATING: -
CIRCULAR MIL AREA: 1.04mm ² -2.62mm ² [2050-5180]
STRANDED WIRE

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.	
DIMENSIONS: mm [in]	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ±-
	1 PLC ±-
	2 PLC ±0.20 [0.008]
	3 PLC ±-
MATERIAL BODY, SEE TABLE	FINISH SLV COLOR, SEE TABLE
SLEEVE, NI SIL PER ASTM B122	

DWN L OLMEDA 25OCT94	AMP Incorporated Harrisburg, PA 17105-3608
CHK M ELLIS 25OCT94	
APVD S BORTNER 25OCT94	
PRODUCT SPEC -	
APPLICATION SPEC -	NAME WIRE SPLICE, STRATOTHERM DIAMOND GRIP, WIRE SIZE, 16-14 AWG
WEIGHT -	SIZE A3
CUSTOMER DRAWING	CAGE CODE 00779
	DRAWING NO C-322346
	SCALE 6:1
	SHEET 1 OF 1
	REV D

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)