

SPECIFICATION CONTROL DRAWING

55PC0741


TITLE **FOUR CONDUCTOR CABLE, UNSHIELDED, UNJACKETED, 1000 VOLT**

Date **12-9-96**

Revision **B**

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

COMPONENT WIRES - 55PC0711

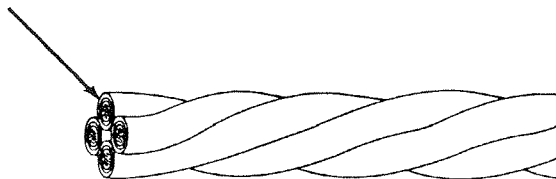

CONSTRUCTION DETAILS						
PART NUMBER	CONDUCTOR SIZE (AWG)	DIAMETER (in.)			WEIGHT (lbs/1000 ft.)	
		LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC0741-22-*	22	.135	.158	.182	15.84	16.41
55PC0741-20-*	20	.153	.179	.205	22.35	23.05
55PC0741-18-*	18	.174	.205	.235	32.29	33.25
55PC0741-16-*	16	.191	.224	.256	40.04	41.15
55PC0741-14-*	14	.224	.263	.301	59.55	61.01
55PC0741-12-*	12	.266	.310	.355	88.73	90.71

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 150°C
 Maximum continuous conductor temperature
 VOLTAGE RATING: 1000 volts (rms)
 INSULATION FLAWS:
 Impulse Dielectric test, 8.0 kV (peak)

PART NUMBER:
 The "*" in the part numbers above shall be replaced by a color code designator with a slash separating the component wire colors.
 Example: AWG 22, white, red, orange and yellow component wires: 55PC0741-22-9/2/3/4

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.

THIS SPECIFICATION SHEET TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HERIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

Raychem

Raychem Corporation
 300 Constitution Drive, Menlo Park, California 94025
 1-800-2 Raychem Fax: 1-415-361-82

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)