
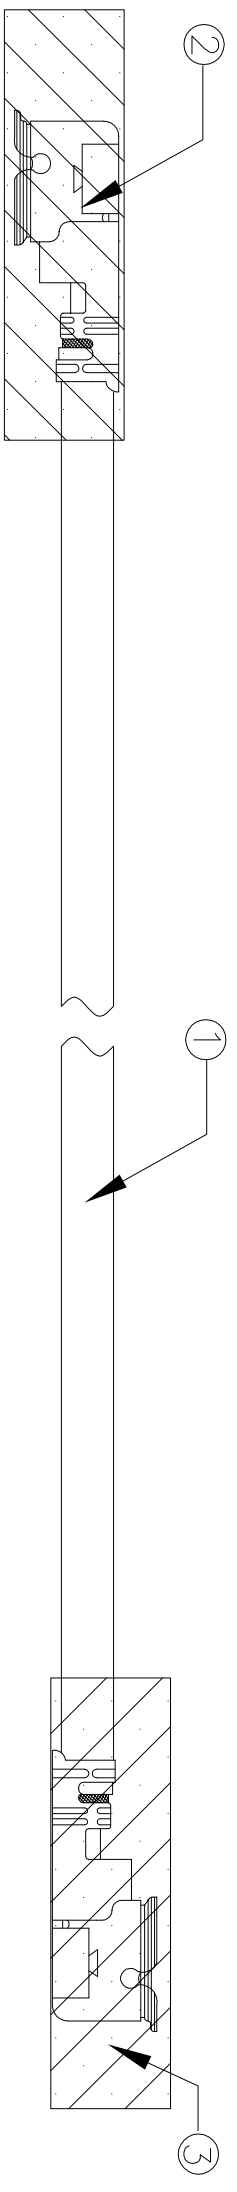


Loc	DIST	REVISONS	
GP	00	P	LTR
		A	NEW RELEASE
		12FEB09	CP LZ

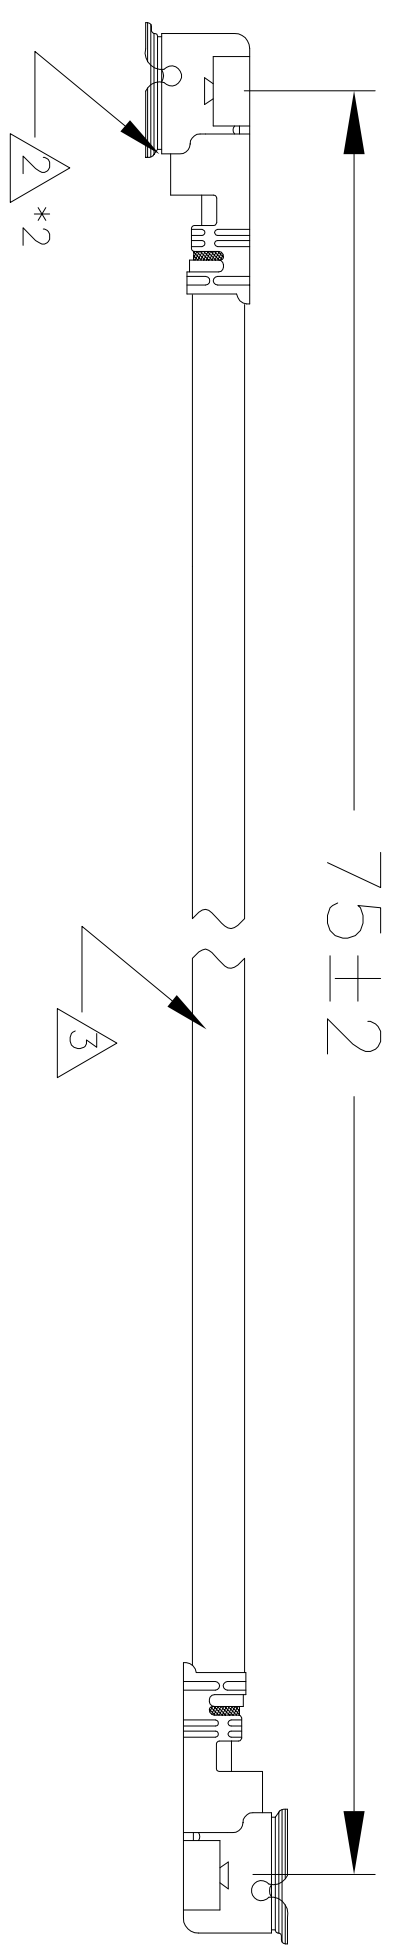

- NOTES:
- CABLE ASSEMBLY TO BE 100% TESTED FOR OPENS, SHORTS AND CONTINUITY  
 HI-POT: 200 VDC FOR 100MS  
 INSULATION RESISTANCE: 50M OHMS MIN  
 CONTINUITY RESISTANCE: 2 OHMS MAX  
 FREQUENCY RANGE: DC TO 6 GHZ  
 VSWR: 1.5:1 MAX
  - CONNECTOR: TYPE III U.FL  
 SUPPLIER: I-PEX 20278-112R-13
  - CABLE: 1.13MM OD, JACKET WHITE, 50 OHMS FEP INSULATED  
 SUPPLIER: GBE OR TE ENGINEERING APPROVED SUPPLIER
  - TWO END U.FL CONNECTORS IN 180 DEGREE DIFFERENCE POSITION
  - PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF  
 TYCO ELECTRONICS STANDARD 230-702

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	12FEB09	Tyco Electronics		Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: mm [INCHES]		CHK	12FEB09	NAME	FWT3 Ericsson UMTS/Aux cable assembly White, 75mm, 180degree		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	12FEB09	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
0 PLC	±	Lucky Zhang		A3	00779	1513287	
1 PLC	±	Product spec					
2 PLC	±	APPLICATION SPEC					
3 PLC	±	WEIGHT					
4 PLC	±	CUSTOMER DRAWING					
FINISH	±						

30	MM	PROTECT TUBING FOR I-PEX 20278	3
2	PC	I-PEX 20278-112R-13 CONNECTOR	2
75	MM	COAXIAL CABLE, WHITE, OD 1.13MM	1
-1	U/M	DESCRIPTION	ITEM

单击下面可查看定价，库存，交付和生命周期等信息

[>>TE Connectivity\(泰科\)](#)