



.050 CENTERLINE MICRO-MATCH VALUE-LINE CONNECTOR FAMILY

Quick Reference Guide

TE Connectivity's (TE) Micro-MaTch Value-line Connector Family product portfolio increases its design flexibility with the new Board-to-Board connectors, in addition to the existing Wire-To-Board portfolio. This product range offers cost effective tape & reel opportunities for automatic pick & place, which reduces assembly time. As extra customer service TE offers hand tooling, semi-automatic tooling plus the support of ready-to-go and customer specific cable assemblies.

The Micro-MaTch Value-line Connector Family product portfolio is built around the existing high quality Micro-MaTch connector system and has been developed to suit environments where a broad temperature range, many mating cycles and vibration resistance are less relevant. On a pitch of 1.27 mm, Micro-MaTch Value-line product portfolio offers a variety of interconnections for the Industrial, Consumer and Datacom industry.

FEATURES AND BENEFITS

- Cost effective Wire-to-Board and Board-to-Board system with tin plated contact design
- Miniature connector system to save space on the printed circuit board
- All connectors supplied on tape & reel and suitable for automatic placing and termination
- Highly reliable gas tight and corrosion free connections between wire and insulation displacement contacts
- Full range of application tooling from hand tool to fully automated equipment
- Cable connectors accepting all standard ribbon cable


.050 Centerline Micro Match Value Line Connector Family

PRODUCT APPLICATIONS

- Home automation and alarm equipment
- Mobile GPS devices
- Lighting
- Air- and climate control units

- CCTV
- Building surface control
- Set top boxes, audio- & video equipment
- Electronic voting machines
- Pay terminals

PRODUCT/APPLICATION SPECIFICATION

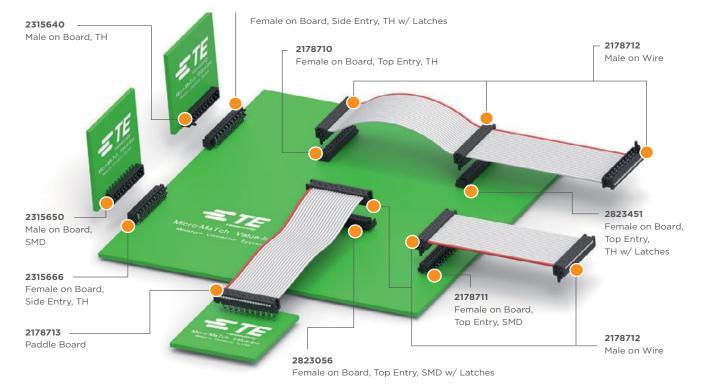

APPLICATION TOOLING

| Hand Tools | | | | | |
|--------------|---------------------------|----------|-----------------------------|------------|--------------------------------------|
| 734155-1 | Pistol grip | 734024-1 | Adapter set | 654061-1 | Flat cable cutting tool |
| Bench Tools | | | | | |
| 733280-3 | Termination die set | 733278-2 | Sub-assy toolset (4-20p) | 1-547008-7 | Lever press incl. toolset (4-24p) |
| Semi-Automat | ic Tools | | | | |
| 677412-7 | Semi automatic base press | 519708-1 | Toolset for 2178712 | 438685-1 | Toolset for 2178713 |

STANDARD CABLE ASSEMBLIES

| STAN | DARD CABLE | ASSEMBLIES | | | or fi |
|------|--------------|--------------|--------------|--------------|-----------|
| POS | Part number* | | Part number* | | Side B |
| 4 | 2205103 | | 2205112 | | Real Card |
| 6 | 2205104 | | 2205113 | Side A | |
| 8 | 2205105 | | 2205114 | Male on Wire | |
| 10 | 2205106 | Side A and B | 2205115 | 2178712 | |
| 12 | 2205107 | Male on Wire | 2205116 | | Side A |
| 14 | 2205108 | 2178712 | 2205117 | Side B | |
| 16 | 2205109 | | 2205118 | Paddle Board | |
| 18 | 2205110 | | 2205119 | 2178713 | |
| 20 | 2205111 | | 2205120 | | |

* -1 L=75 mm; -2 L=150 mm; -3 L=200 mm

MICRO-MATCH VALUE-LINE PRODUCT PORTFOLIO

| CONTRACTOR OF THE OWNER | AND NO WIN | auaan Treet | |
|--|---|-------------------------|-------------------------|
| 2178710 Female on Board, Top Entry, TH | 2178711 Female on Board, Top Entry, SMD | 2178713 Paddle Board | 2178712 Male on Wire |



2823451 Female on Board, Top Entry, TH, w/ Latches



Female on Board, Top Entry, SMD



2315666* Female on Board, Side Entry, TH



2315677* Female on Board, Side Entry, TH, w/ Latches



2315640* Male on Board, TH



2315650* Male on Board, TH

* New part introduction 2019

.050 Centerline Micro Match Value Line Connector Family

| | P&P Tape | Number of Positions | | | | |
|-------------------------------|----------|---------------------|-------------|-------------|-------------|-------------|
| | | 4 | 6 | 8 | 10 | 12 |
| Female on Board Connectors | - | 2315666-4 | 2315666-6 | 2315666-8 | 1-2315666-0 | 1-2315666-2 |
| | - | 2315677-4 | 2315677-6 | 2315677-8 | 1-2315677-0 | 1-2315677-2 |
| | - | 2178710-4 | 2178710-6 | 2178710-8 | 1-2178710-0 | 1-2178710-2 |
| | - | 2823451-4 | 2823451-6 | 2823451-8 | 1-2823451-0 | 1-2823451-2 |
| | Ν | 2178711-4 | 2178711-6 | 2178711-8 | 1-2178711-0 | 1-2178711-2 |
| | Y | 7-2178711-4 | 7-2178711-6 | 7-2178711-8 | 8-2178711-0 | 8-2178711-2 |
| | Ν | 2823056-4 | 2823056-6 | 2823056-8 | 1-2823056-0 | 1-2823056-2 |
| | Y | 7-2823056-4 | 7-2823056-6 | 7-2823056-8 | 8-2823056-0 | 8-2823056-2 |
| Cable Connectors | - | 2178713-4 | 2178713-6 | 2178713-8 | 1-2178713-0 | 1-2178713-2 |
| | - | 2178712-4 | 2178712-6 | 2178712-8 | 1-2178712-0 | 1-2178712-2 |
| Male on Board Connectors | - | 2315640-4 | 2315640-6 | 2315640-8 | 1-2315640-0 | 1-2315640-2 |
| | Ν | 2315650-4 | 2315650-6 | 2315650-8 | 1-2315650-0 | 1-2315650-2 |
| | Y | 7-2315650-4 | 7-2315650-6 | 7-2315650-8 | 8-2315650-0 | 8-2315650-2 |

| | | Number of Positions | | | | |
|-----------------------------|----------|---------------------|-------------|-------------|-------------|--|
| | P&P Tape | 14 | 16 | 18 | 20 | |
| Female on Board | - | 1-2315666-4 | 1-2315666-6 | 1-2315666-8 | 2-2315666-0 | |
| | - | 1-2315677-4 | 1-2315677-6 | 1-2315677-8 | 2-2315677-0 | |
| | - | 1-2178710-4 | 1-2178710-6 | 1-2178710-8 | 2-2178710-0 | |
| | - | 1-2823451-4 | 1-2823451-6 | 1-2823451-8 | 2-2823451-0 | |
| Connectors | N | 1-2178711-4 | 1-2178711-6 | 1-2178711-8 | 2-2178711-0 | |
| | Y | 8-2178711-4 | 8-2178711-6 | 8-2178711-8 | 9-2178711-0 | |
| | N | 1-2823056-4 | 1-2823056-6 | 1-2823056-8 | 2-2823056-0 | |
| | Y | 8-2823056-4 | 8-2823056-6 | 8-2823056-8 | 9-2823056-0 | |
| | - | 1-2178713-4 | 1-2178713-6 | 1-2178713-8 | 2-2178713-0 | |
| Cable Connectors | - | 1-2178712-4 | 1-2178712-6 | 1-2178712-8 | 2-2178712-0 | |
| Male on Board Connectors | - | 1-2315640-4 | 1-2315640-6 | 1-2315640-8 | 2-2315640-0 | |
| | N | 1-2315650-4 | 1-2315650-6 | 1-2315650-8 | 2-2315650-0 | |
| | Y | 8-2315650-4 | 8-2315650-6 | 8-2315650-8 | 9-2315650-0 | |

FREQUENTLY ASKED QUESTIONS

Can we make Micro-MaTch Value-line Connector Family connectors with contacts in Gold plating?

No. The Micro-MaTch contact system is designed to deliver a high normal-force as required for tinplated contact interconnections. This pressure is too high for gold plated interconnections, where much lower normal-forces are required.

We have noticed that the kinks of the Micro-MaTch Valueline Connector Family thru-hole solder contacts on Top Entry Connectors, start with random direction. Is this technically OK?

Yes, this is OK and does not affect contact retention. For those connectors the kink direction in each row can start random, but sequential contacts within each row have kinks pointing in opposite directions.

Which flat ribbon cable is suitable for Micro-MaTch Value-line Connector Family Male on Wire and Paddle Board connectors and why?

The new design of the cable connectors within TE's Micro- MaTch Value-line Connector Family will perfectly accept most flat ribbon cable with 'oval' conductor design. The cable insulation's oval shape at each position and the flat transition between the positions, both exactly match with corresponding shape in the cover. This enables accurate pre-positioning of the conductors regarding to the IDCslots during the termination process. It is also Important that the conductor's pitch is within tolerance and that they are symmetrically positioned in the insulation shape.

Are Micro-MaTch Value-line Connector Family Male on Wire and Paddle Board connectors also suitable for discrete wire termination?

For discrete wires, Micro-MaTch connectors offer the Crimp-On Snap-In (COSI) connectors in 2 wire ranges. For more information please contact your local TE Connectivity Sales representative.

Is there retention force performance available for the female connector version with locking latches?

No. The plastic latches were not designed to retain the connectors but to produce an audible click when the connectors are fully mated.

What exactly are the main differences between the Value-line and the actual (Industrial) Micro-MaTch version?

The actual Micro-MaTch version has a higher operating temperature, more mating cycles, and more vibration resistance. The Value-line is perfect for applications that are not exposed to heavy vibration, operate within a standard temperature range between -30 °C and +85°C and are less prone to frequent mating cycles. For more information please contact your local TE Connectivity Sales representative.

LET'S CONNECT

We make it easy to connect with our experts and are ready to provide all the support you need. Just call your local support number or visit www.te.com to chat with a Product Information Specialist.

TECHNICAL SUPPORT

te.com/support-center

te.com

Micro-MaTch TE connectivity, TE Connectivity (logo) and EVERY CONNECTION COUNTS are trademarks. All other logos, products and/or company names referred to herein might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

© 2019 TE Connectivity. All Rights Reserved.

1-1773840-5 10/19 AK Original

INDUSTRIAL /// .050 CENTERLINE MICRO MATCH VALUE LINE CONNECTOR FAMILY



单击下面可查看定价,库存,交付和生命周期等信息

>>TE Connectivity(泰科)