

5	4	3	
			 ▲ CAGE MATEF HEAT SINK HEAT SINK LIGHT PIP EMI SPRIN ▲ MINIMUM PI 3. MATES WIT ▲ REFERENCE DRILL HOL ▲ REFERENCE DRILL HOL ▲ DATUMS AND 6. MINIMUM P SINGLE SI DOUBLE SI ▲ HEAT SINK, ASSEMBLY. SHIPPED. ▲ DATUM -A- ④ SURFACE TF CAGE STAN ▲ DATUM -A- ④ SURFACE TF CAGE STAN ▲ DATUM FRENCE ■ DATE CODE BY HEAT SINK ▲ SPRING FIN
	SEE DETAIL J-		HEAT SINK CAGE ASSE LIGHT PIP IS SEATED

THIS DRAWING IS A DIMENSIONS: mm \bigcirc TBD

2		

	REVISIONS					
Р	LTR	DESCRIPTION	DATE	DWN	APVD	
	В	REV PER ECO-09-020440	IISEP2009	CR	JP	
	ΒI	REVISE PER ECR-15-013438	IISEP2015	RG	SH	

1

ERIAL: NICKEL SILVER, 0.25 THICK

NK MATERIAL: ALUMINUM NK CLIP MATERIAL: STAINLESS STEEL

IPE MATERIAL: CLEAR POLYCARBONATE, UL-94V-O RATED. ING MATERIAL: COPPER ALLOY

PITCH DIMENSION.

ITH QSFP MSA COMPATIBLE TRANSCEIVER.

APPLICATION SPEC 114-13217 FOR RECOMMENDED OLE DIAMETER AND PLATING THICKNESS.

ND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.

PC BOARD THICKNESS:

SIDED = I.45mm (shown, pg. 4) SIDED = 2.2mm

IK, CLIP, AND LIGHT PIPE SHIPPED ASSEMBLED TO CAGE Y. CAGE ASSEMBLY MAY BE PRESSED INTO THE PCB AS

A- IS TOP SURFACE OF HOST BOARD.

TRACES PERMITTED WITHIN THIS AREA EXCEPT WHERE ANDOFFS, SHOWN IN DETAIL J, CONTACT PC BOARD.

N APPLIES WITH MODULE INSTALLED IN THE CAGE TO HEAT SINK.

HEIGHT OF CUSTOMER SUPPLIED LED OFF D: I.70mm.


(YYWWD) MARKED ON TOP OF CAGE AND CONCEALED SINK APPLIES TO CAGE ASSEMBLY ONLY.

INISH: 0.8μm MIN TIN OVER 0.8μm MIN NICKEL. NON-PLATED EDGES PERMÍSSIBLE.

AND CLIP SHIPPED ASSEMBLED TO CAGE ASSEMBLY. SEMBLY MAY BE PRESSED INTO THE PCB AS SHIPPED. IPE MUST BE ASSEMBLED BY CUSTOMER AFTER THE CAGE ED ON THE PCB.

	$\overline{4}$	3.	7 PCI HEAT	SINK	1888972-3
	7	23.() NETWORKIN	G HEAT SINK	1888972-2
	7	6.() SAN HEAT	SINK (SHOWN)	888972 -
		A	DES	SCRIPTION	P A R T N U M B E R
С	ONTROLLED DO	COMENT.	DWN 09MAR2007 C. VALENTINE CHK 09MAR2007 E. BRIGHT	TE	TE Connectivity
0 PLC ±- 1 PLC ±0.5 2 PLC ±0.13		ECIFIED: 5 13 013	APVD 09MAR2007 <u>E. BRIGHT</u> PRODUCT SPEC 108-2286 APPLICATION SPEC		, THRU BEZEL, QSFP, AND SINGLE LIGHT PIPE
	4 PLC ±0.0 ANGLES FINISH	±-	4- 32 7 weight _	size cage code drawing no $A \downarrow 0 0 7 7 9 $ $C = 188$	RESTRICTED TO -
	<u>/ 3\</u>	<u>ک</u>	CUSTOMER DRAWING	S	CALE 4:1 SHEET OF REVBI

·	8 This drawing is unpublished.	RELEASED FOR PUBLICATION	7 2007	6
	C COPYRIGHT 2007 BY -	ALL RIGHTS RESERVED.		
D				
С				
В				
A				
·				

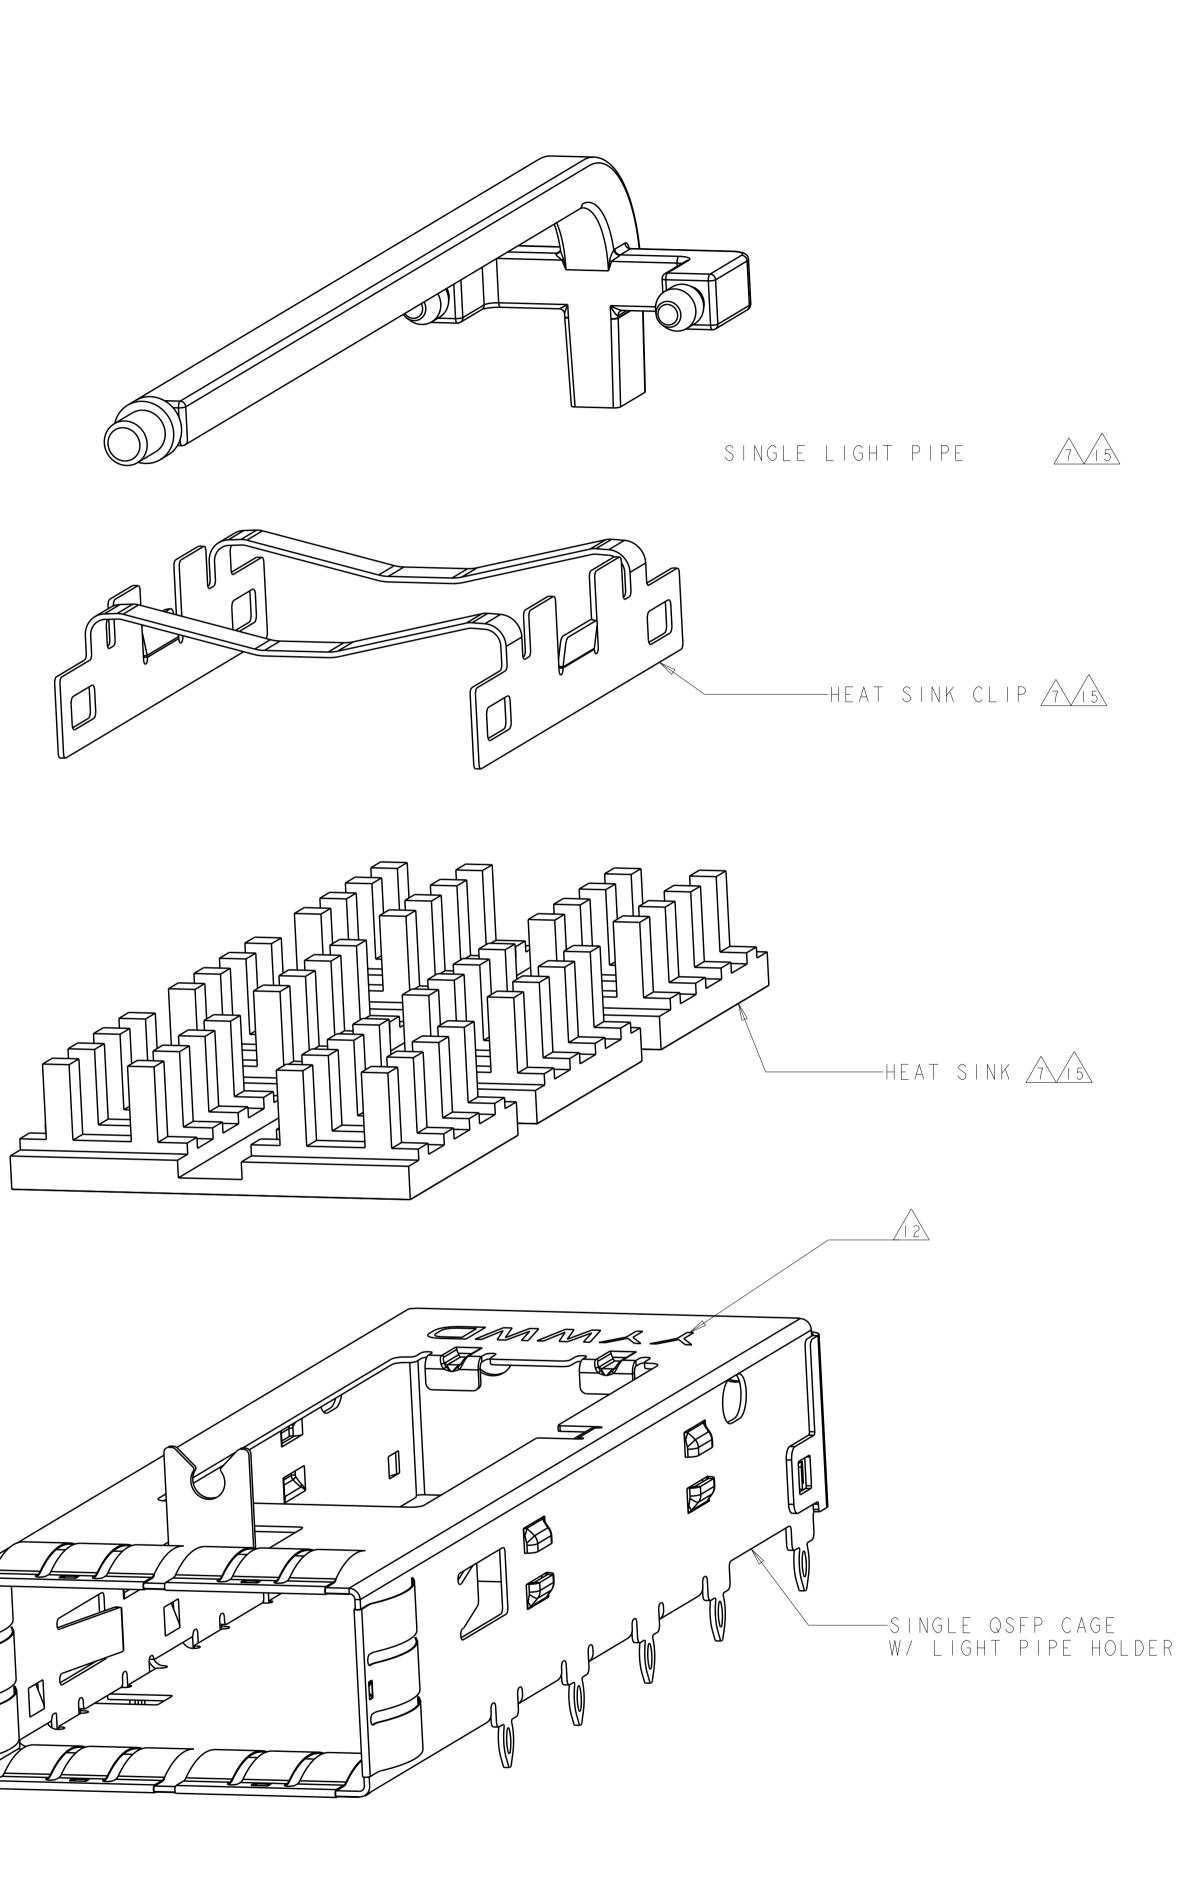

4

3

5

THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONS: mm ATERIAL TBD

EXPLODED ISOMETRIC VIEW SCALE 6:1


		REVISIONS			
Ρ	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET I	-	-	-

1

В


А

WN 09MAR2007 C. VALENTINE HK 09MAR2007 **E**TE TE Connectivity k <u>E. Bright</u> TOLERANCES UNLESS OTHERWISE SPECIFIED: 09MAR2007 APVD E. BRIGHT PRODUCT SPEC M^eCAGE ASSEMBLY, THRU BEZEL, QSFP, W/ HEAT SINK AND SINGLE LIGHT PIPE 0 PLC ±-1 PLC ±0.5 2 PLC ±0.13 3 PLC ±0.013 4 PLC ±0.0001 ANGLES ± 108-2286 APPLICATION SPEC size cage code drawing no A 1 0 0 7 7 9 \mathbb{C} - 1 888972 ESTRICTED ||4-|32|7 IGHT -SCALE 4:1 SHEET OF REVBI USTOMER DRAWING

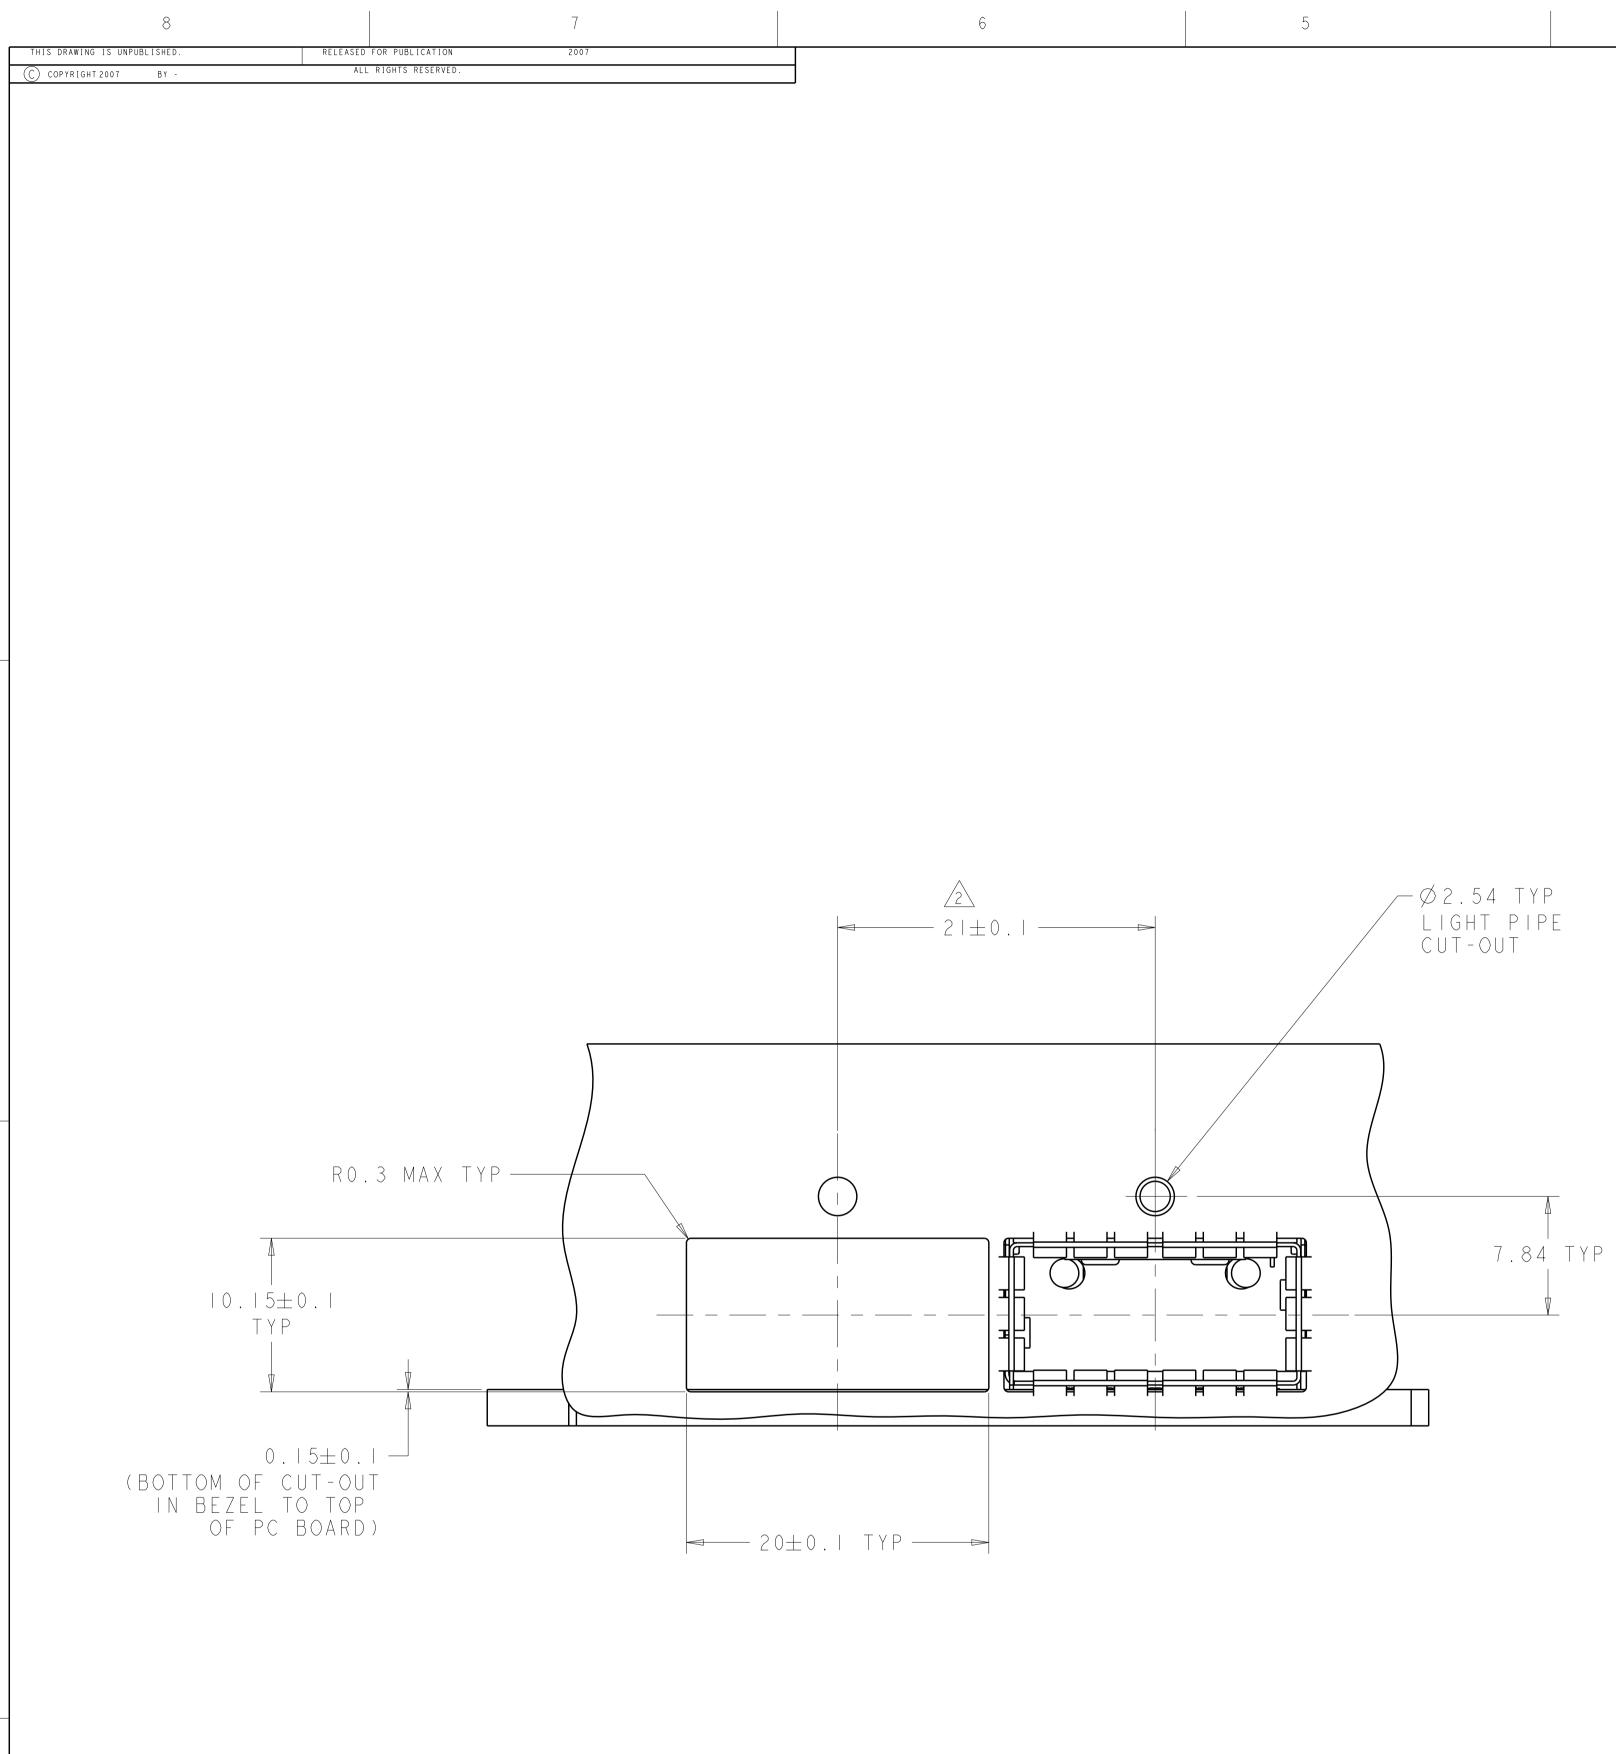

4805 (3/13)



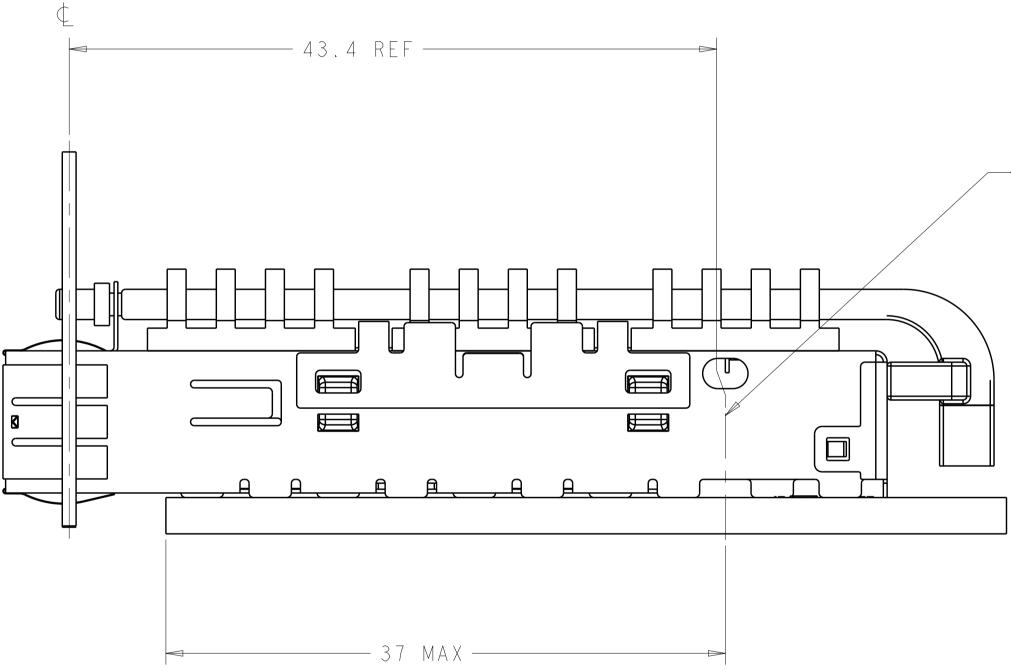

THIS	DRAWING	ΙS	А
	DIMENSIONS	:	
	mm		
	<u></u>		
MATERIA	TBD -		

A C	ONTROLLED DOCUMENT.	DWN 09MAR2007 <u>C. VALENTINE</u> снк 09MAR2007 E. BRIGHT	TE Connectivity
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±0.5 2 PLC ±0.13 3 PLC ±0.013	APVD 09MAR2007 E. BRIGHT PRODUCT SPEC 108-2286 APPLICATION SPEC	NAME CAGE ASSEMBLY, THRU BEZEL, QSFP, W/ HEAT SINK AND SINGLE LIGHT PIPE -
	4 PLC ±0.0001 ANGLES ±- FINISH	4- 32 7 weight	SIZE CAGE CODE DRAWING NO
	-	CUSTOMER DRAWING	$A = \begin{bmatrix} 0 & 0 & 7 & 7 & 9 \\ \hline C & - & 1 & 888972 \\ \hline SCALE & A & + & SHEET & 3 & OF & REV \\ \hline SCALE & A & + & 1 & SHEET & 3 & SHEET & 3 & SHEET \\ \hline SCALE & A & + & 1 & SHEET & 3 & SHEET & 3 & SHEET \\ \hline SCALE & A & + & 1 & SHEET & 3 & SHEET & 3 & SHEET \\ \hline SCALE & A & + & 1 & SHEET & 3 & SHEET & 3 & SHEET \\ \hline SCALE & A & + & 1 & SHEET & 3 & SHEET & 3 & SHEET \\ \hline SCALE & A & + & 1$

--¢OF CONNECTOR GUIDE PINS PER SPEC.


t of connector

1

		REVISIONS			
Ρ	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET I	-	-	-
	•	1			

С

В

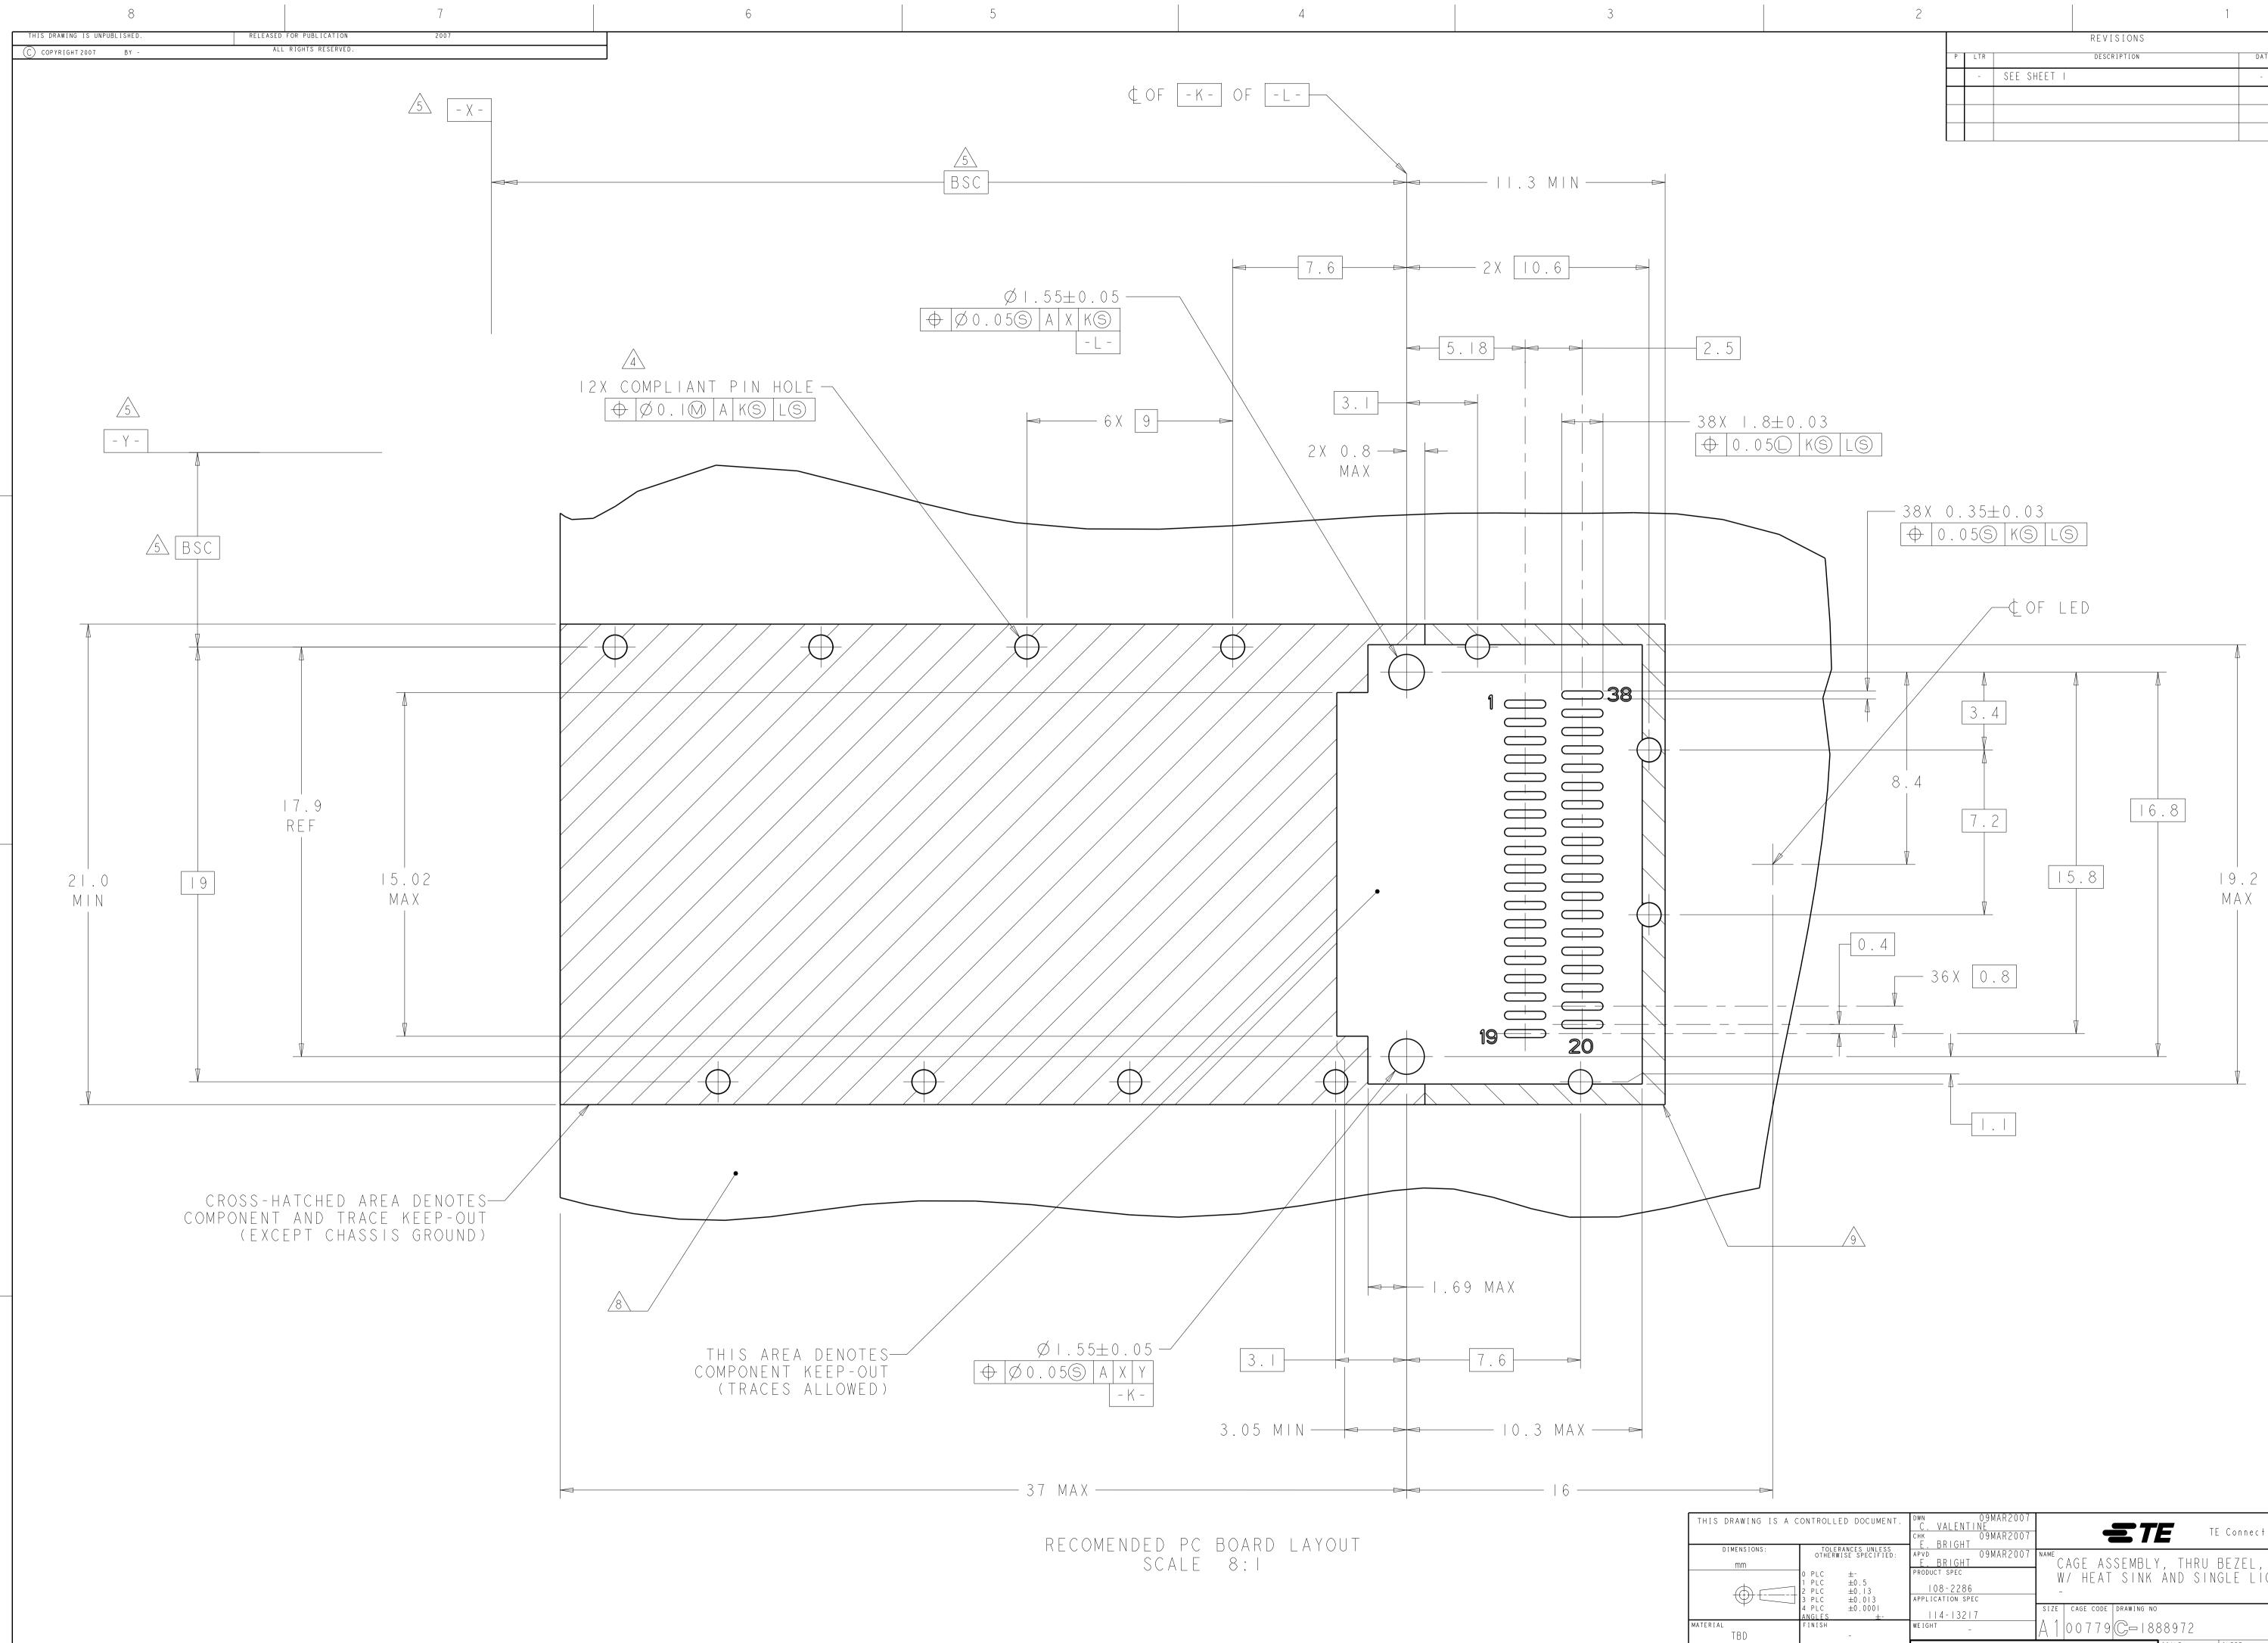

Downloaded From Oneyac.com

4805 (3/13)

\cap	
1	
<u></u>	

			REVISIONS			
			REVISIONS			
Ρ	LTR		DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET I		-	-	-

С	ONTROLLED DOCUMENT.	DWN 09MAR2007 <u>C. VALENTINE</u> снк 09MAR2007 E. BRIGHT TE Connectivity
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±0.5 2 PLC ±0.13	L. DRIGHT APVD O9MAR2007 PRODUCT SPEC 108-2286 O9MAR2007 NAME CAGE ASSEMBLY, THRU BEZEL, QSFP, W/ HEAT SINK AND SINGLE LIGHT PIPE
	3 PLC ±0.013 4 PLC ±0.0001 ANGLES ±-	APPLICATION SPEC II4-I32I7 RESTRICTED TO
	FINISH -	WEIGHT - A 1 0 0 7 7 9 C - 1 888972 -
	-	CUSTOMER DRAWING SCALE 4:1 SHEET 4 OF 4 REVB

В

D

单击下面可查看定价,库存,交付和生命周期等信息

>>TE Connectivity(泰科)