

4805 (3/13)


2	1						
				REVISIONS			
	P L	TR		DESCRIPTION	DATE	DWN	A P V [
	,	A	RELEASED		20MAY2019	CJV	JW
	ŀ	В	REVISED PER	ECN-21-101549	15MAR2021	ТХ	DZ
	(	С	REVISED PER	ECN-21-122209	180CT2021	ТМ	DZ
- GOLD PLA TIN PLATE 'NS - TIN PL				,			
ND BASIC DI	MEN	SI	ons est	ABLISHED BY CU	JSTOME	R.	
HOST PCB TH	H I C k	( N E	ESS: 1	. 5.			
	WIT ACT	ГН Г F	THIS R PAD LAY(				

PADDLE CARD. SPECIFICATION PINOUT MAY ALSO DESIGNATE PAD SEQUENCE DIFFERENT FROM ILLUSTRATION.


6 POSITIONS DESIGNATED AS "SIGNAL" ARE REQUIRED LOCATIONS FOR HIGH SPEED DIFFERENTIAL PAIR SIGNALING. THESE LOCATIONS MAY ALSO BE USED FOR SUPPORTING SIDEBAND SIGNALS OR OTHER UTILITY PURPOSES. POSITIONS DESIGNATED AS "GROUND" ARE REQUIRED WHEN SUPPORTING HIGH SPEED DIFFERENTIAL SIGNALS. THESE LOCATIONS MAY ALSO BE USED FOR SIDEBAND SIGNALS OR OTHER UTILITY PURPOSES.


COMPONENT AND TRACE KEEP OUT AREA. EACH EDGE 0.15 MIN FROM EDGE OF HOLE.

A PART NUMBER AND DATE CODE MARKED IN APPROXIMATE AREA SHOWN.

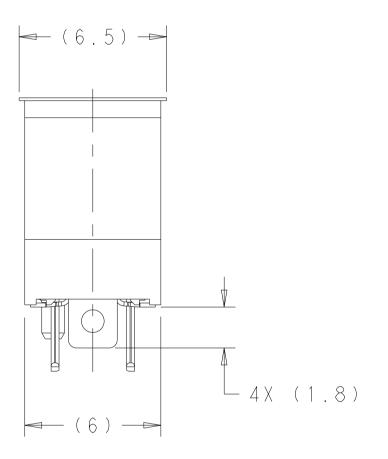


200	Y	ES	HARD	TRAY		1 2 V	/	1 - 2 3 3 8 7 1 8 -		18-0	
200	ľ	VO	HARD	TRAY		48V	/	2338718-6		8 - 6	
200	ľ	VO	HARD	TRAY		1 2 V	/	2338718		8 - 5	
200	YES		HARD	TRAY		48V	/	23387		8 - 4	
200	YES		HARD	TRAY		1 2 V	/	2338718		8 - 3	
200	) OYES		SOFT	TRAY		48V	/	2338718		8 - 2	
200	O YES		SOFT	TRAY		1 2 V	/	2338718-		8 - 1	
TING CLES	IFS PLATE TAPE		PACKAGING			/OLTA RATII		P A R T N U M B E R			
		DWN C. VALENT CHK H. ANDREWS APVD H. ANDREWS PRODUCT SPEC - APPLICATION SPE - WEIGHT	22JUN2018 S	REC 4C SLI size ca	EPTA WITH VER Ge code	НІGН	SEMBLY POWER,			ESTRICTED TO	
		CUSTOMER DF	AWING	/ \     • •			scale 6:	1 SHEET 1	of 4	rev C	

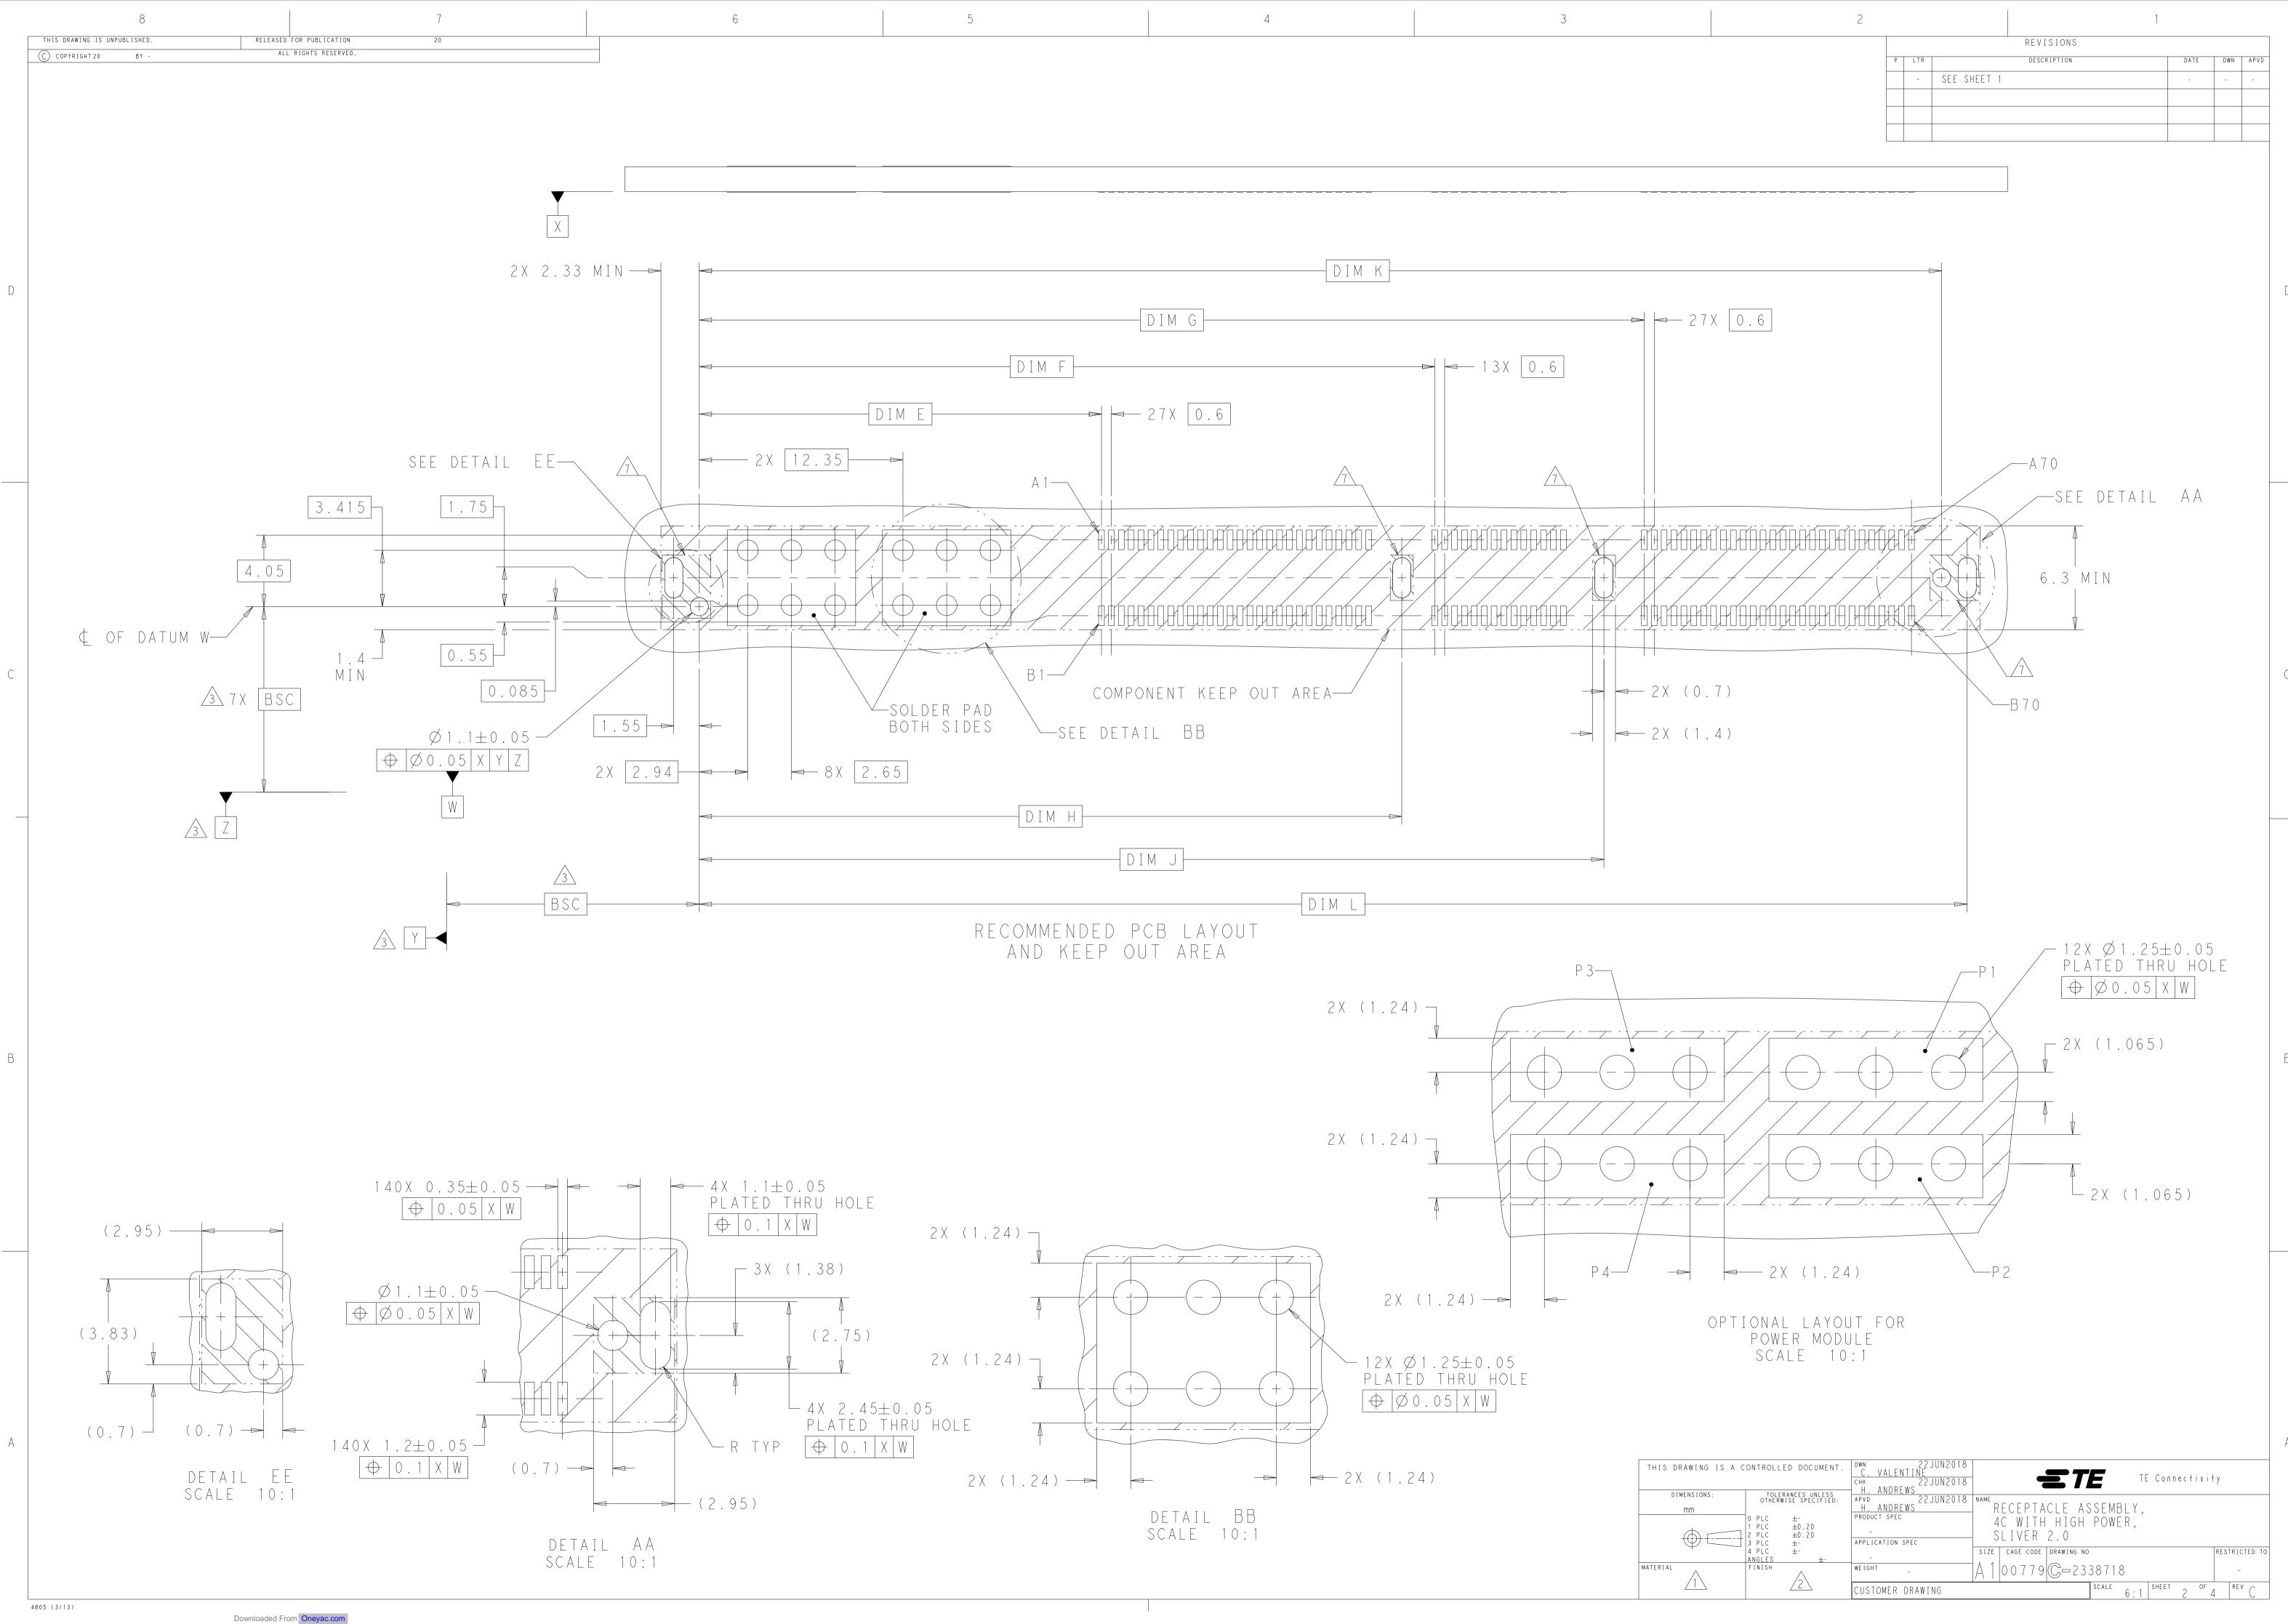

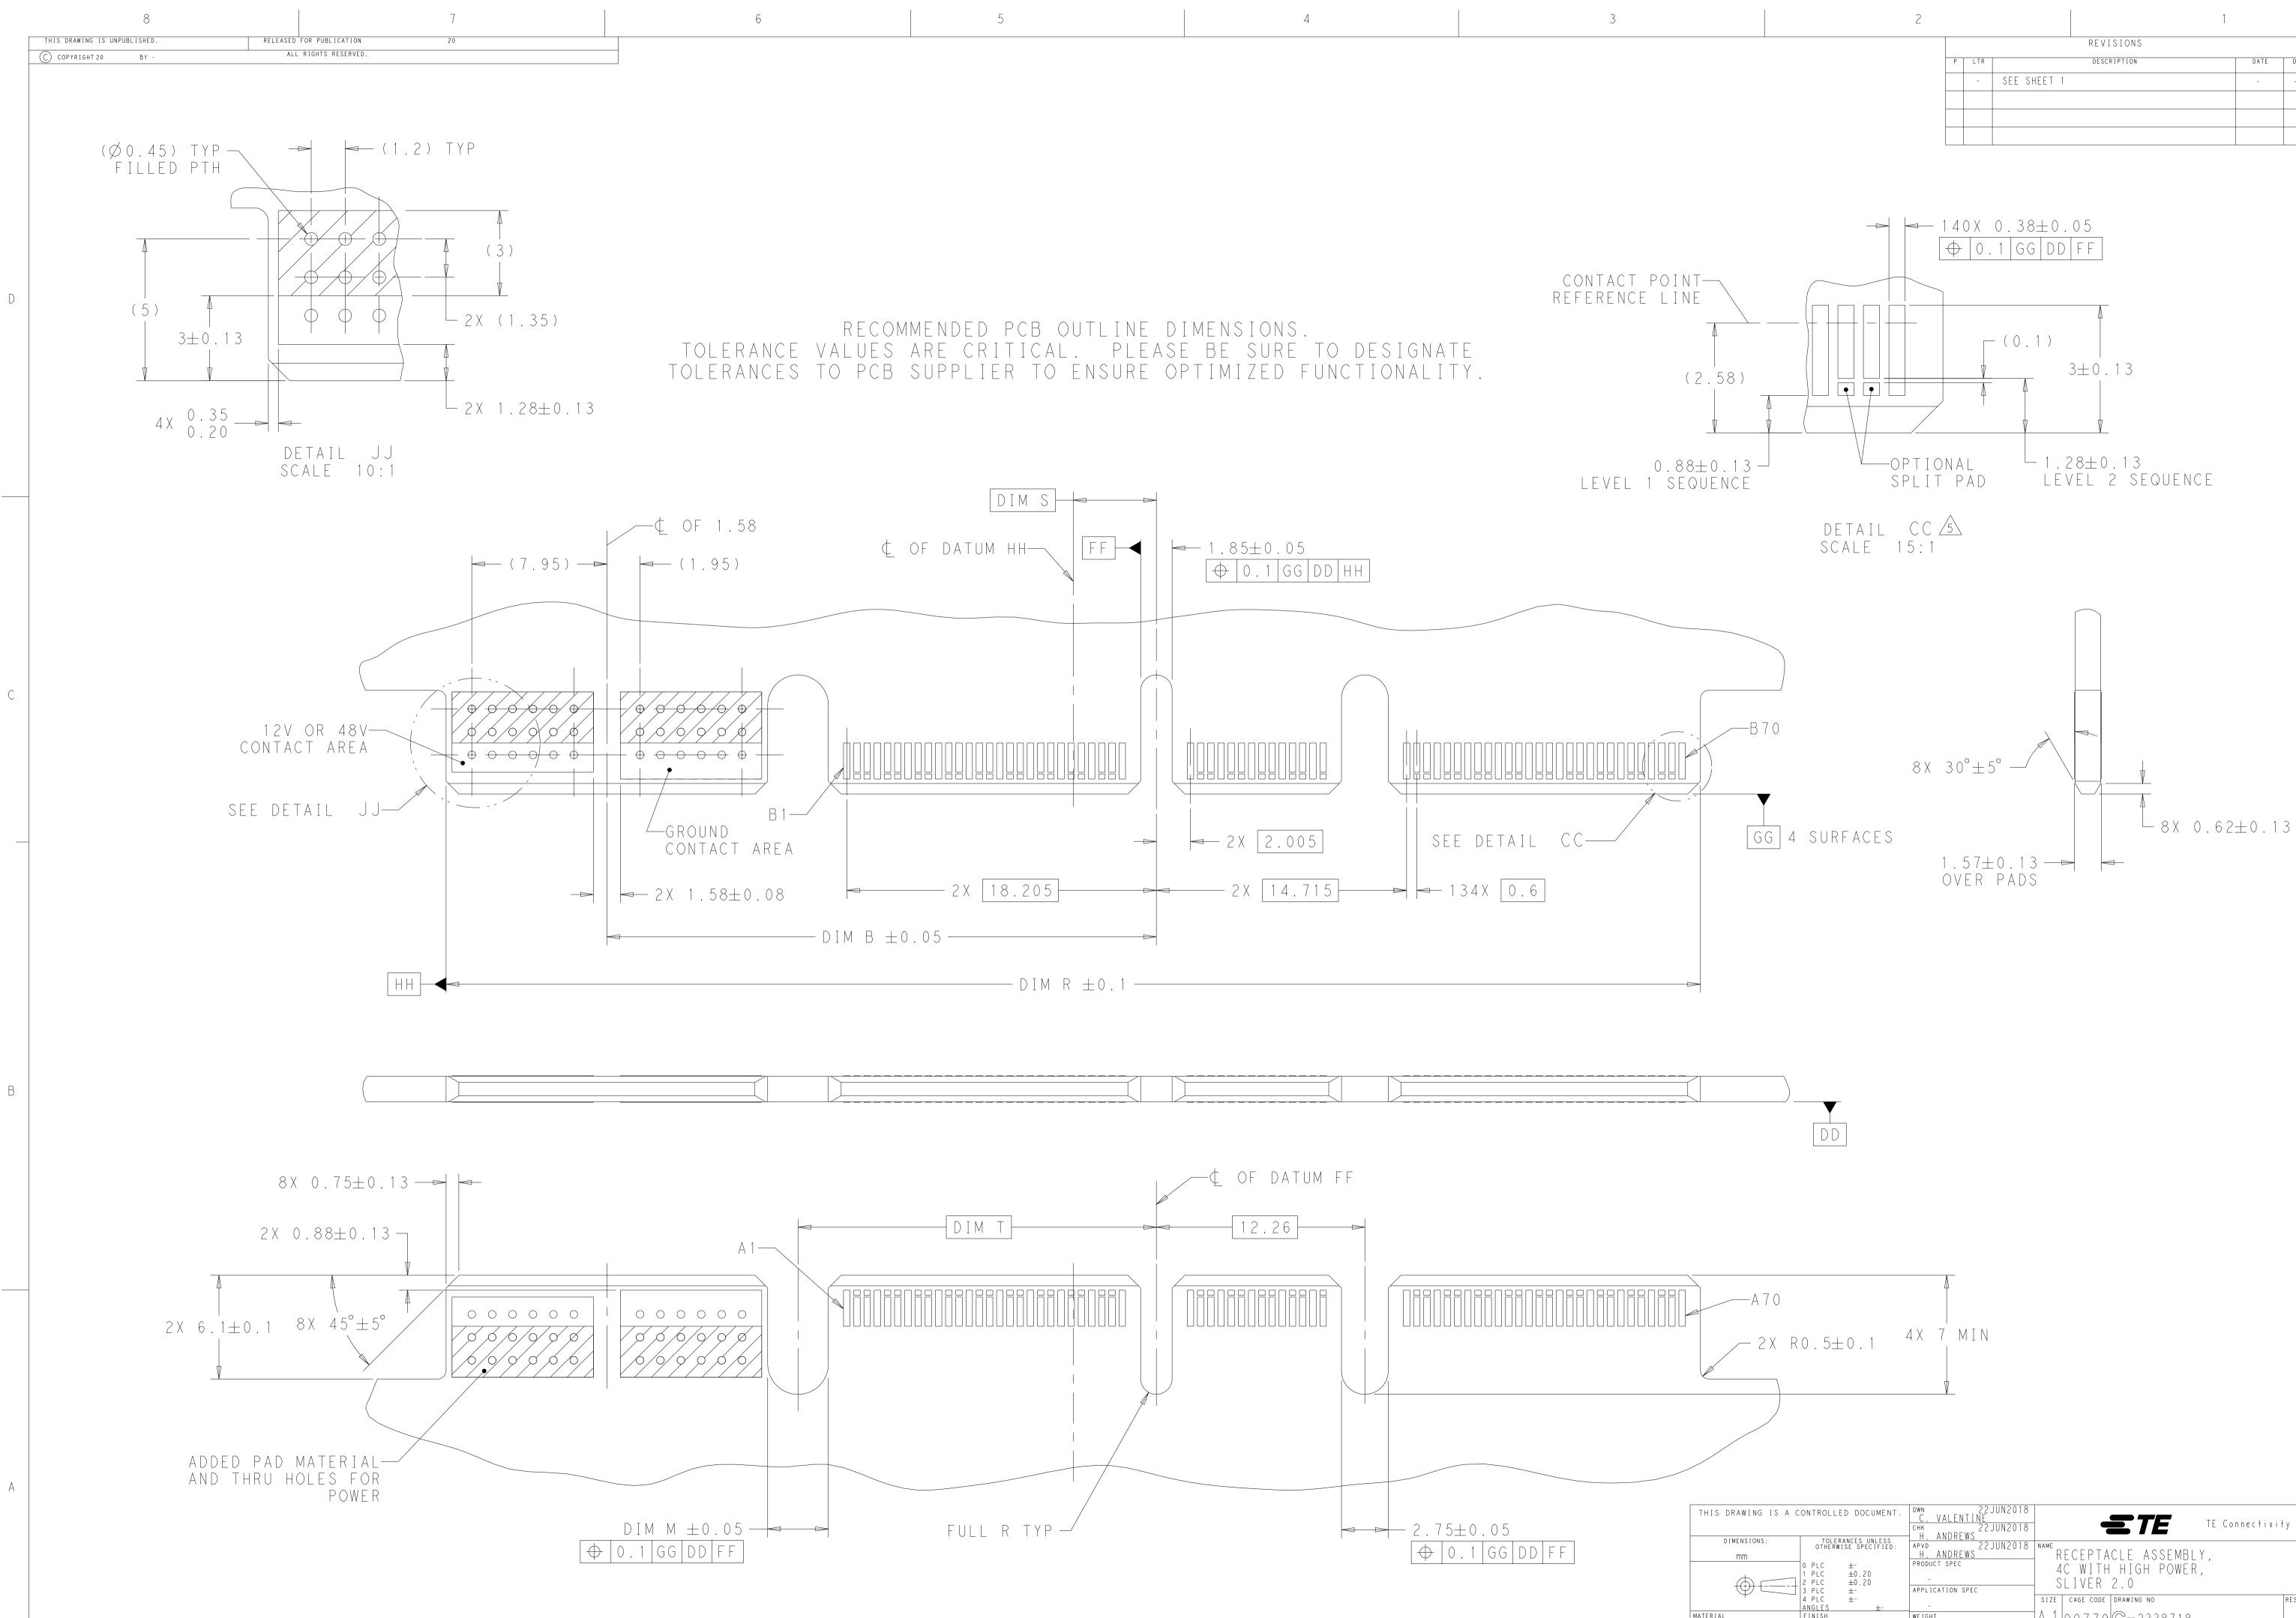

4805 (3/13)

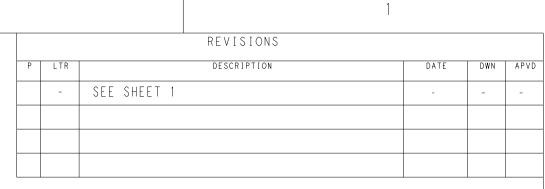

CONTROLLED DOCUMENT.		DWN 22JUN2018 C. VALENTINE Cнк 22JUN2018 H. ANDREWS						
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD 22JUN2018 H. ANDREWS	RECEPTACLE ASSEMBLY,					
_	0 PLC ±- 1 PLC ±0.20 2 PLC ±0.20 3 PLC ±-	PRODUCT SPEC - APPLICATION SPEC	4C WITH HIGH POWER, SLIVER 2.0					
	4 PLC ±- ANGLES ±-	-	SIZE CAGE CODE DRAWING NO RESTRICTED TO					
	FINISH	WEIGHT _	A  00779 C=2338718 -					
		CUSTOMER DRAWING	SCALE 6:1 SHEET 3 OF 4 REV C					

	8		7		(	ô
THIS DRAWING IS UNF	PUBLISHED.	RELEASED FOR PUBLICATIO	DN 20			
C COPYRIGHT 20	BY -	ALL RIGHTS RESERV	'ED.			
	CONTACT NUMBER	SIDE A	SIDE B	CONTACT NUMBER	SIDE A	SIDE B
	1	GROUND	GROUND	36	SIGNAL	SIGNAL
	2	SIGNAL	SIGNAL	37	SIGNAL	SIGNAL

SIGNAL

GROUND

SIGNAL

SIGNAL

GROUND

GROUND

SIGNAL

SIGNAL

GROUND

SIGNAL

SIGNAL

GROUND

SIGNAL

GROUND

SIGNAL

SIGNAL

GROUND

GROUND

SIGNAL

SIGNAL

SIGNAL

SIGNAL

GROUND

GROUND

4

5

6

7

8

9

10

1 1

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

4805 (3/13)

Downloaded From Oneyac.com

HARD TRAY

CONNECTOR CONTACT IDENTIFICATION  $\Delta$ 

- 1. MATERIAL: TRAY- HIPS, COLOR: BLACK. BOX- CORRUGATED FIBERBOARD. TRANSPARENT BAG- PE.
- 2. DIMENSIONS: TRAY- L= 330, W= 136, H= 17.5. BOX-L= 13.75 IN, W= 11.75 IN, H= 5.75 IN.

GROUND

SIGNAL

SIGNAL

GROUND

GROUND

GROUND

SIGNAL

SIGNAL

SIGNAL

SIGNAL

GROUND

GROUND

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

GROUND

SIGNAL

SIGNAL

GROUND

GROUND

GROUND

SIGNAL

SIGNAL

GROUND

3. QUANITY: 36 PIECES PER TRAY. 432 PIECES PER BOX.

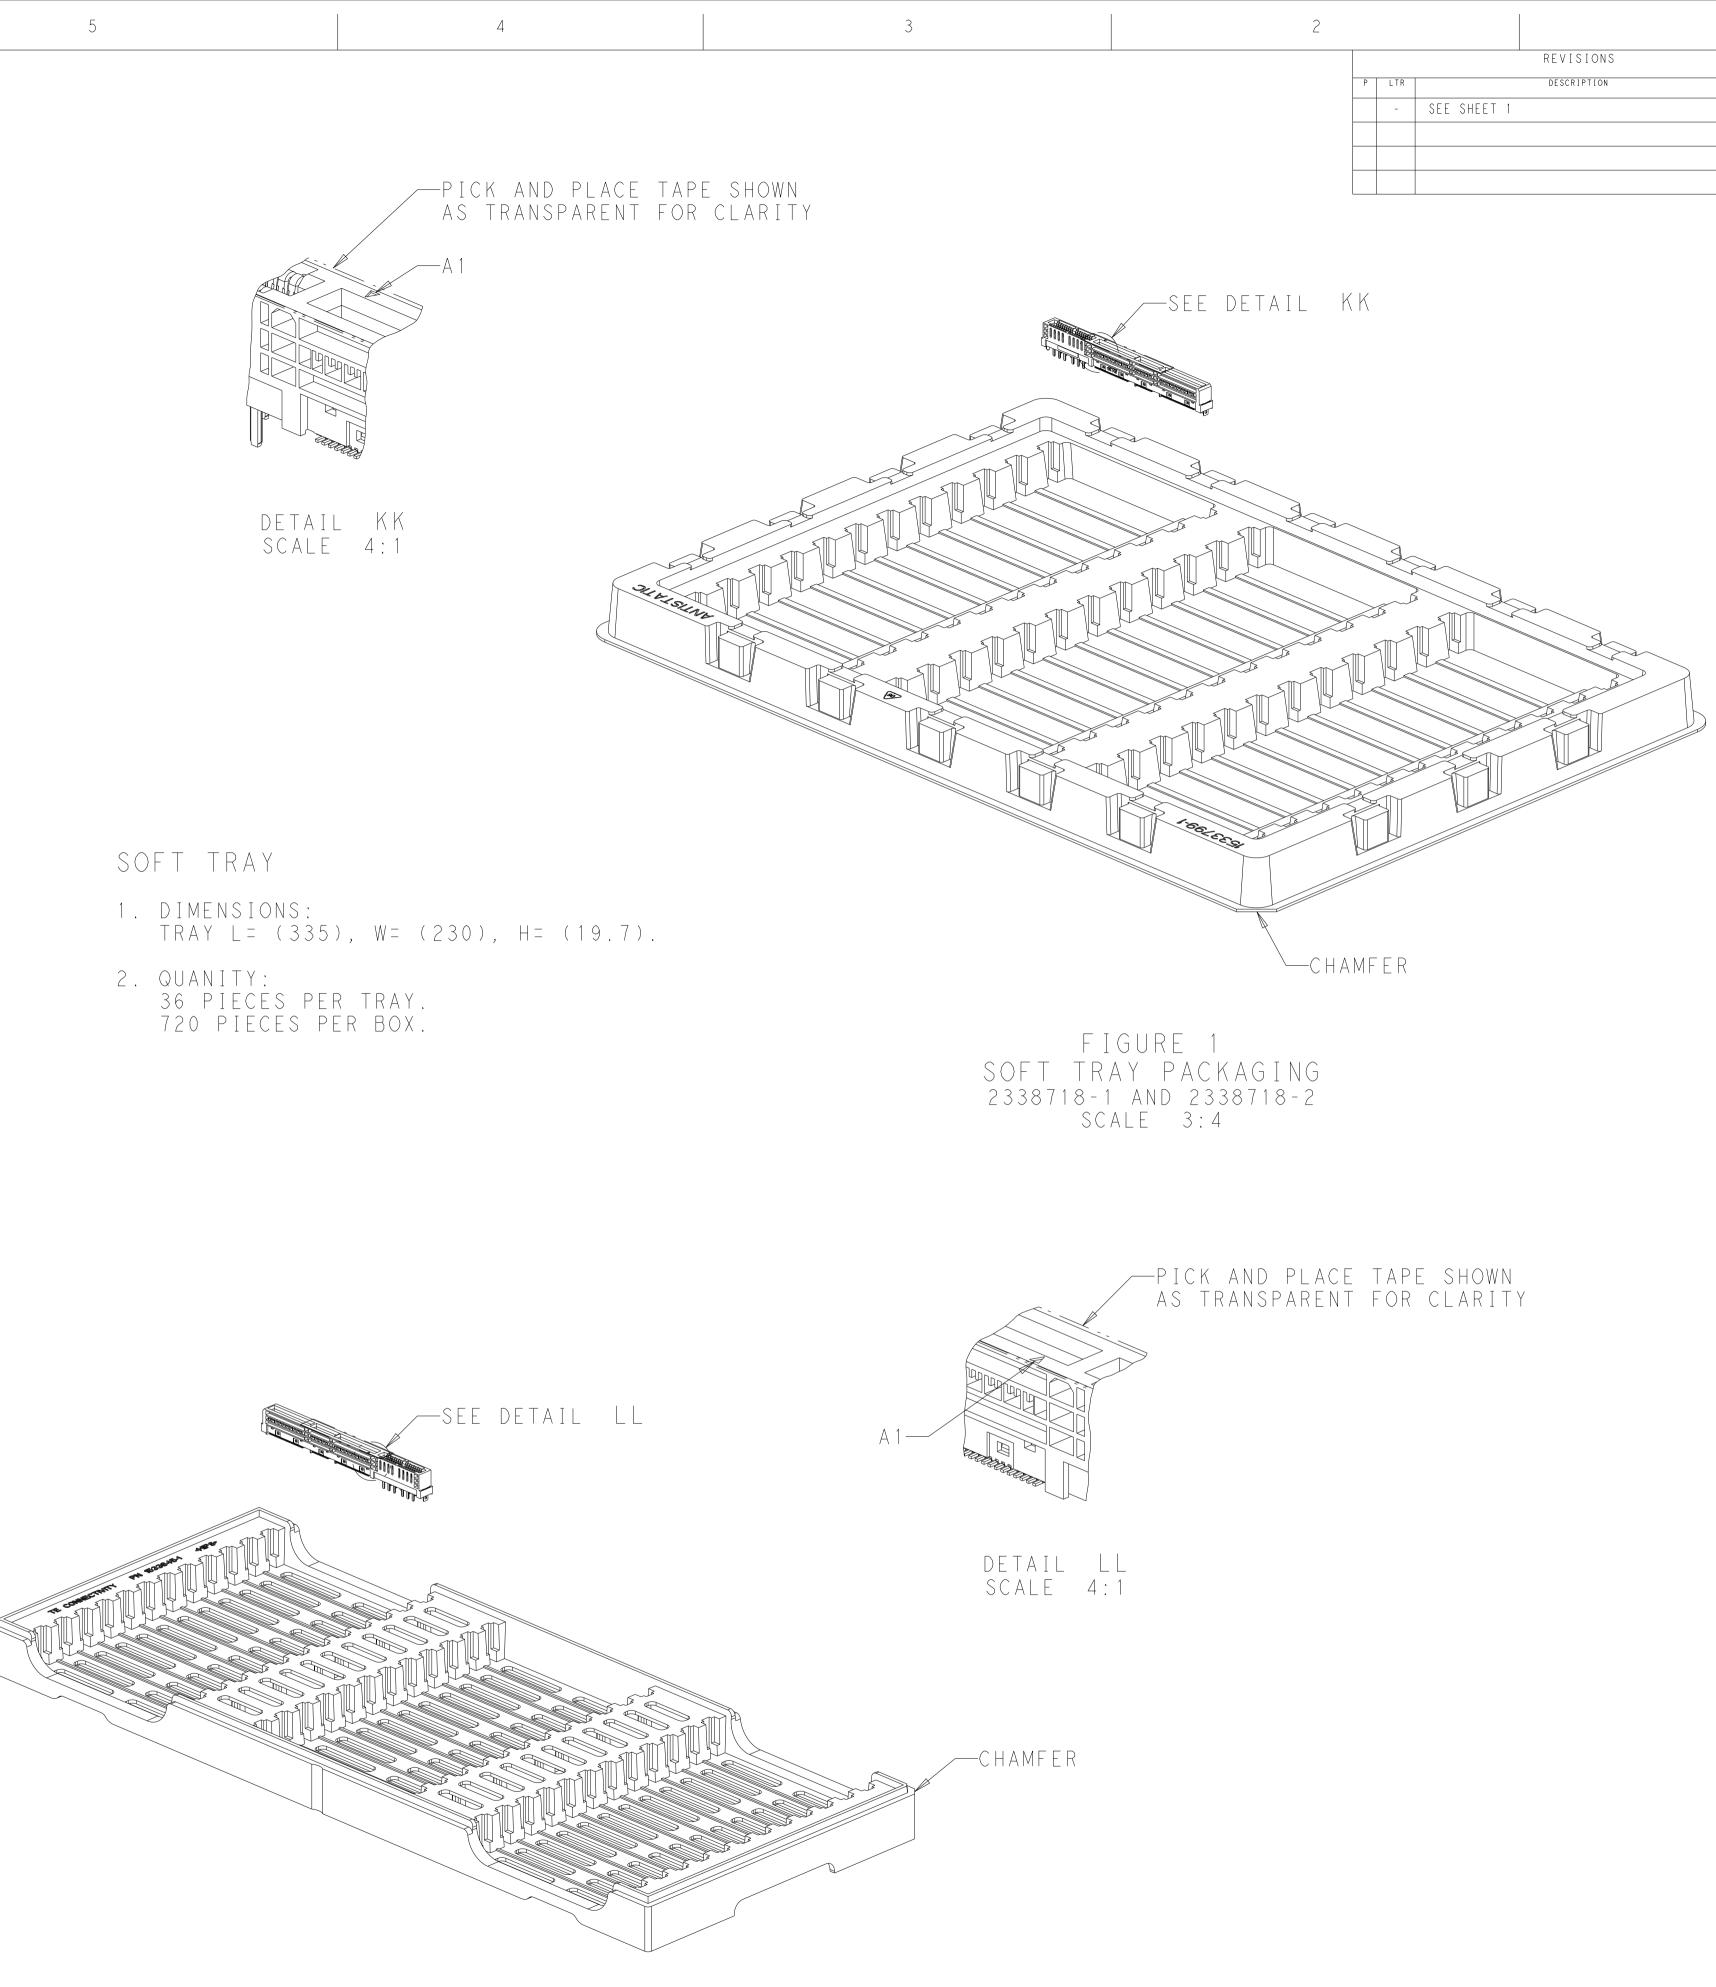


FIGURE 2 HARD TRAY PACKAGING 2338718-3 TO 1-2338718-0 SCALE 3:4

THIS DRAWING IS A

DIMENSIONS:

mm

2				1			
			REVISIONS				
	Р	LTR	DESCRIPTION		DATE	DWN	APVD
		-	SEE SHEET 1		-	-	-

C	ONTROLLED DOCUMENT.	DWN 22JUN2018 C. VALENTINE снк 22JUN2018 H. ANDREWS	TE Connectivity
-	TOLERANCES UNLESS   OTHERWISE SPECIFIED:   0 PLC ±-   1 PLC ±0.20   2 PLC ±0.20   3 PLC ±-	APVD 22JUN2018 H. ANDREWS PRODUCT SPEC	RECEPTACLE ASSEMBLY, 4C WITH HIGH POWER, SLIVER 2.0
_	4 PLC ±- ANGLES ±- FINISH		SIZE CAGE CODE DRAWING NO RESTRICTED T A 1 0 0 7 7 9 $\bigcirc$ 2 3 3 8 7 1 8 -
		CUSTOMER DRAWING	$\begin{array}{c c c c c c c c c c c c c c c c c c c $

单击下面可查看定价,库存,交付和生命周期等信息

>>TE Connectivity(泰科)